




CONSTRUCT INLET IN ACCORDANCE WITH THESE SPECIFICATIONS AND PENN D.O.T. PUBLICATION 408, LATEST REVISION
INLET ADJUSTMENT FOR 6" OR GREATER SHALL BE WITH PRECAST CONCRETE RINGS.
ALL INLETS ARE TO BE A MINIMUM OF 4' DEEP. MANHOLE STEPS REQUIRED IN ALL INLETS OVER 5' DEEP.
THE INTERIOR OF ALL INLETS TO BE PAINTED WITH UNSEED OIL TO PROTECT THE CONCRETE FROM ROAD SALT.



ROBINSON TOWNSHIP SPECIFICATIONS

PENNSYLVANIA


STORM INLET DETAIL
WITH FRAME & GRATE

H M T

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

REVISION	DATE
1	02/19/07

EXHIBIT 2

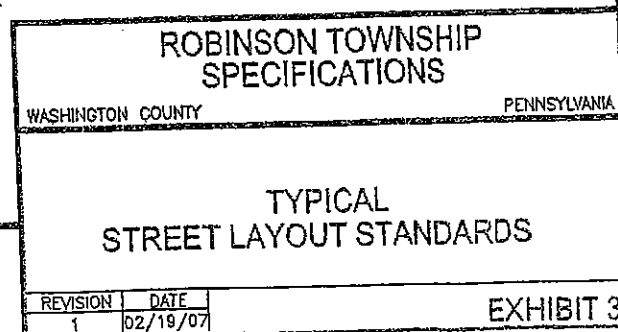


HMT

130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

TYPICAL STREET LAYOUT STANDARDS

EXHIBIT 3

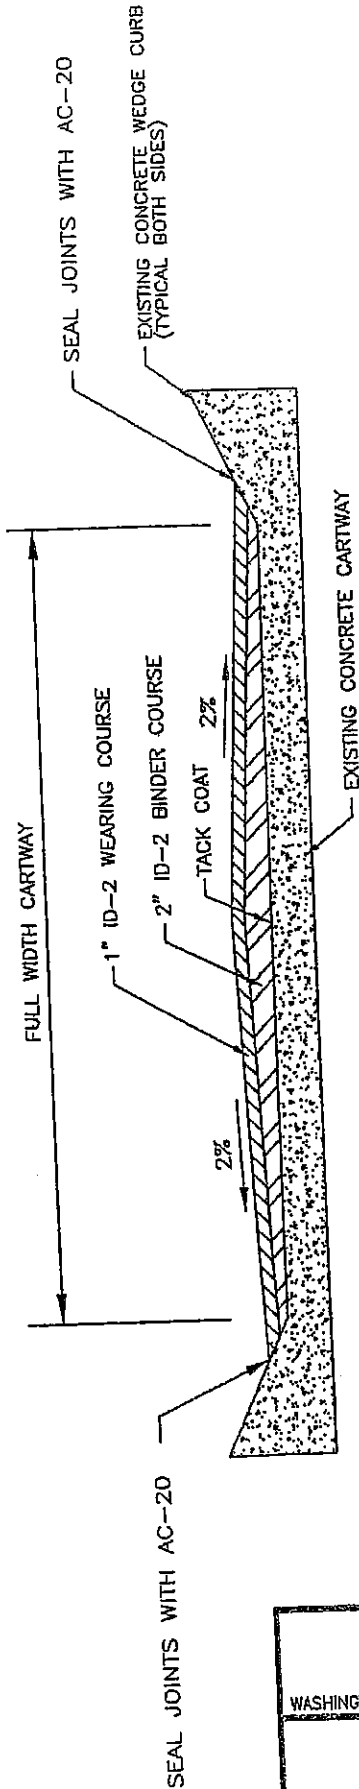

NOTES:

1. REDUCE BINDER THICKNESS AT CURBLINE TO MAINTAIN SUFFICIENT CURB REVEAL.
2. ADJUST PAVING AROUND EXISTING ROOF DRAINS TO ALLOW PROPER FLOW AS NEEDED.
3. ANY EXISTING CRACKS IN CONCRETE PAVEMENT GREATER THAN 1/4" SHALL BE SEALED WITH AC-20 PRIOR TO PAVING (PRICE THIS ITEM WITH SURFACE PREPARATION)

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

**ROBINSON TOWNSHIP
SPECIFICATIONS**


WASHINGTON COUNTY

PENNSYLVANIA

**FULL WIDTH OVERLAY DETAIL
EXISTING CONCRETE WEDGE CURB**

REVISION	DATE
1	02/19/07



EXHIBIT 4

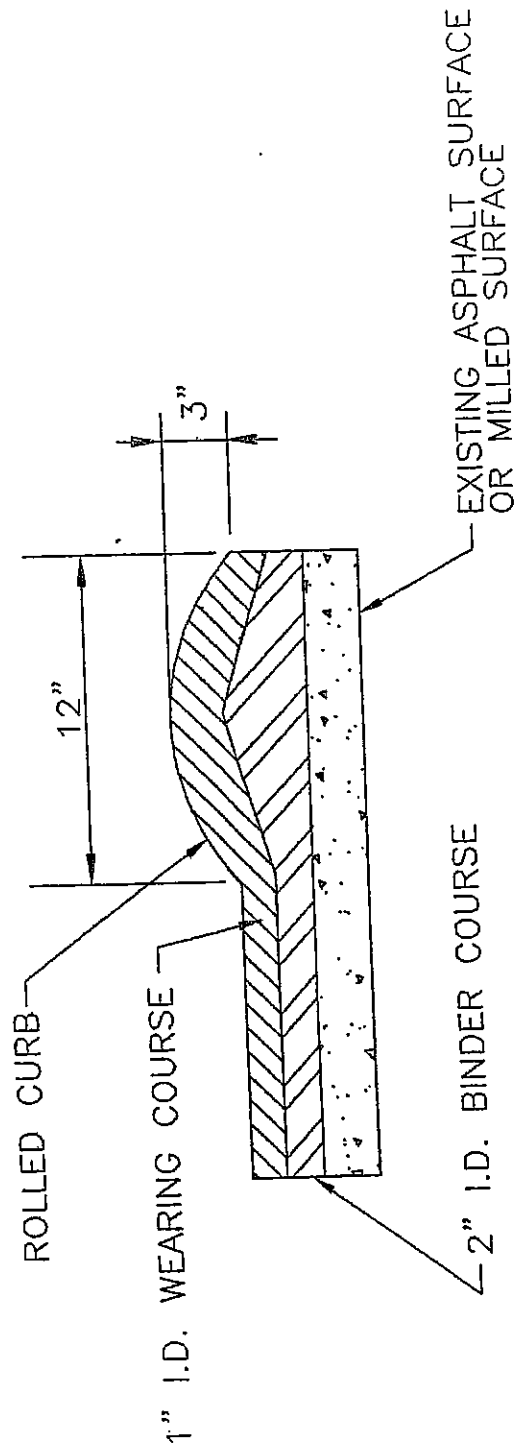

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP SPECIFICATIONS		PENNSYLVANIA
WASHINGTON COUNTY		
BITUMINOUS ROLL CURB DETAIL FOR ASPHALT OVERLAY		
REVISION	DATE	EXHIBIT 5
1	02/19/07	

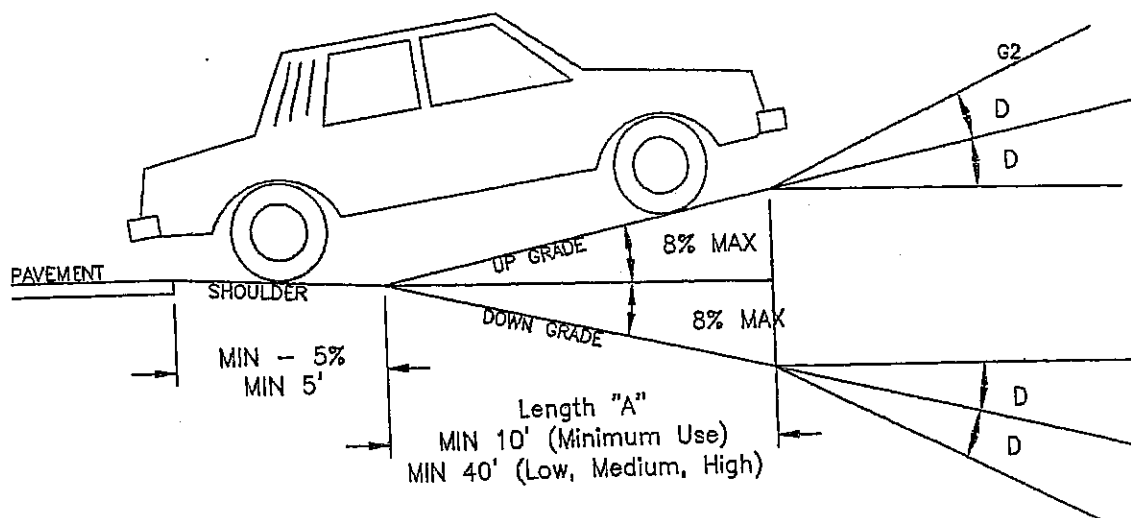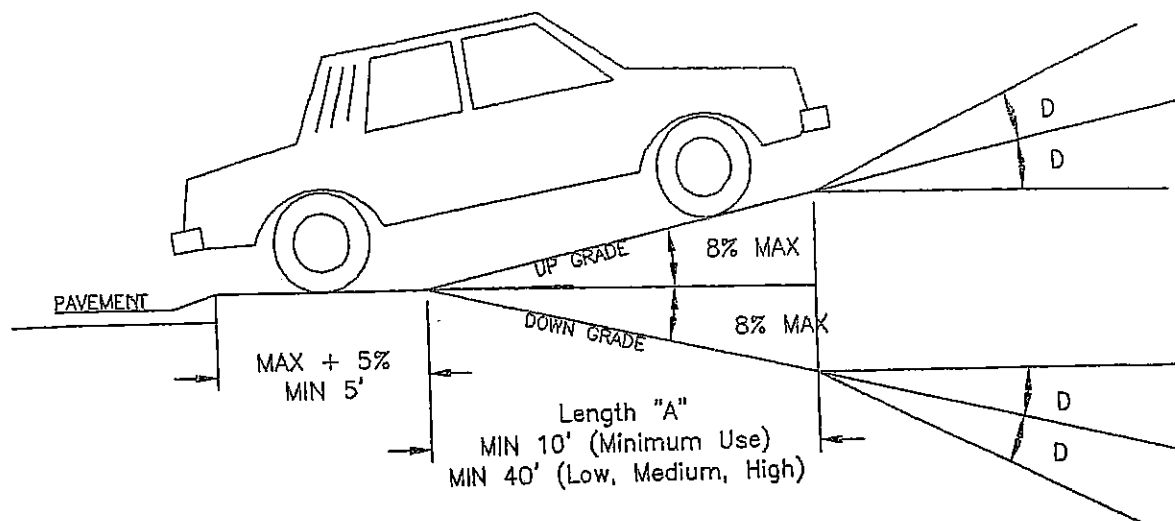

The shoulder slope usually varies from 4% to 6%. However, the shoulder slope should be maintained when constructing the driveway.

For grade changes greater than those shown in the figure, vertical curves at least 10 feet long shall be constructed and length "A" shall be increased.

Grades (G2) shall be limited to 15% for minimum use driveways and from 5% to 8% for low, medium, or high volume driveways within the right-of-way.

Maximum Grade Change (D)

	Desireable	Maximum
High Volume Driveway	0%	3%
Medium Volume Driveway	3%	6%
Low Volume Driveway	6%	Controlled by Vehicle Clearance

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP SPECIFICATIONS



WASHINGTON COUNTY


PENNSYLVANIA

DRIVEWAY STANDARD

REVISION	DATE
1	02/19/07

EXHIBIT 6

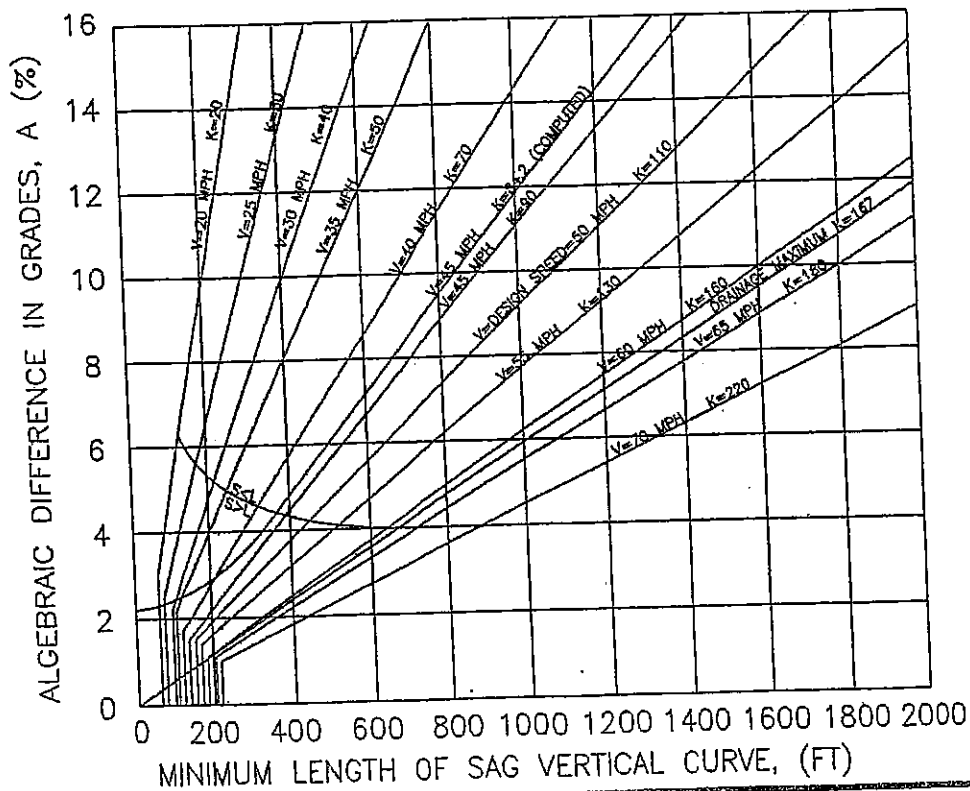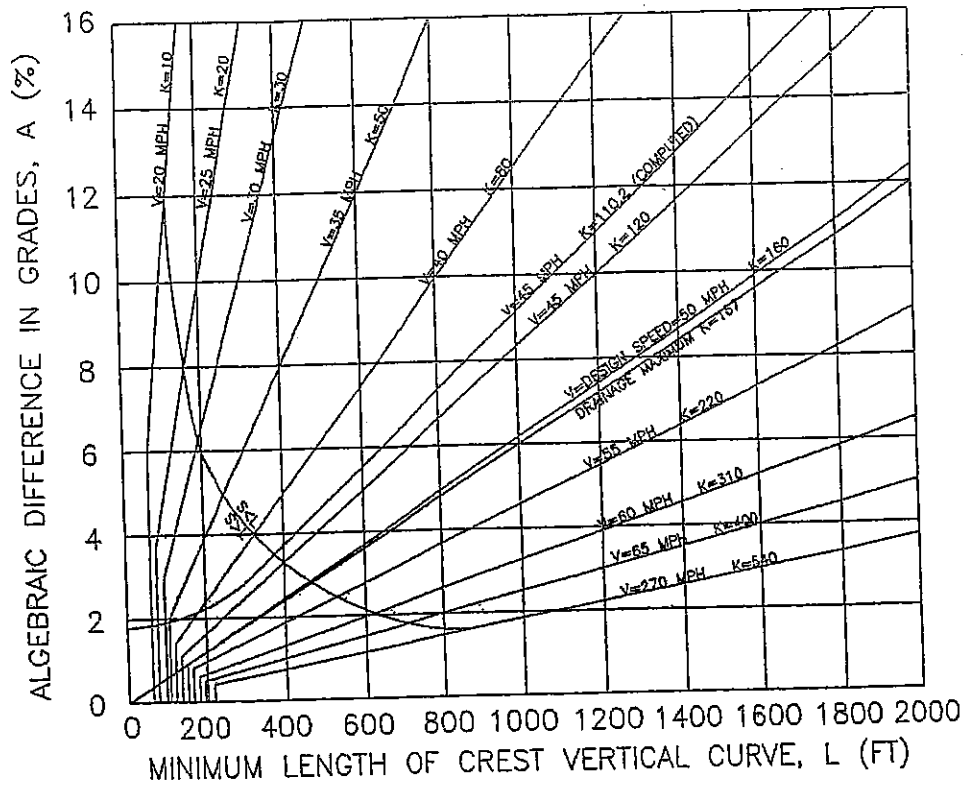


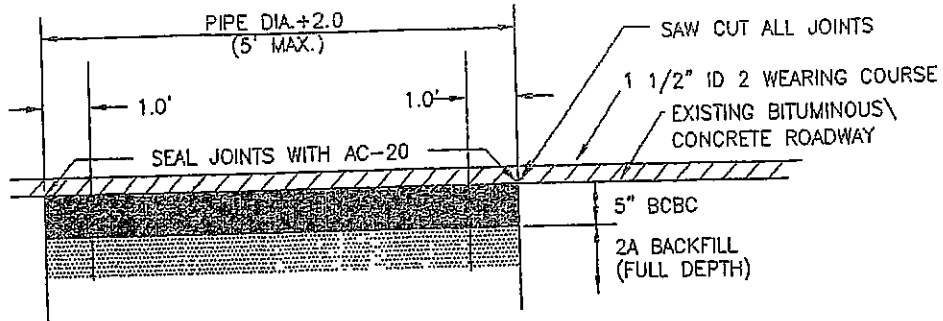

DETAIL NOTES:

1. WIDTH = PIPE DIA.+2.0' (5' MAX.) UNLESS OTHERWISE SPECIFIED BY THE PLANS OR DIRECTED BY THE ENGINEER.

BITUMINOUS TRENCH REPLACEMENT

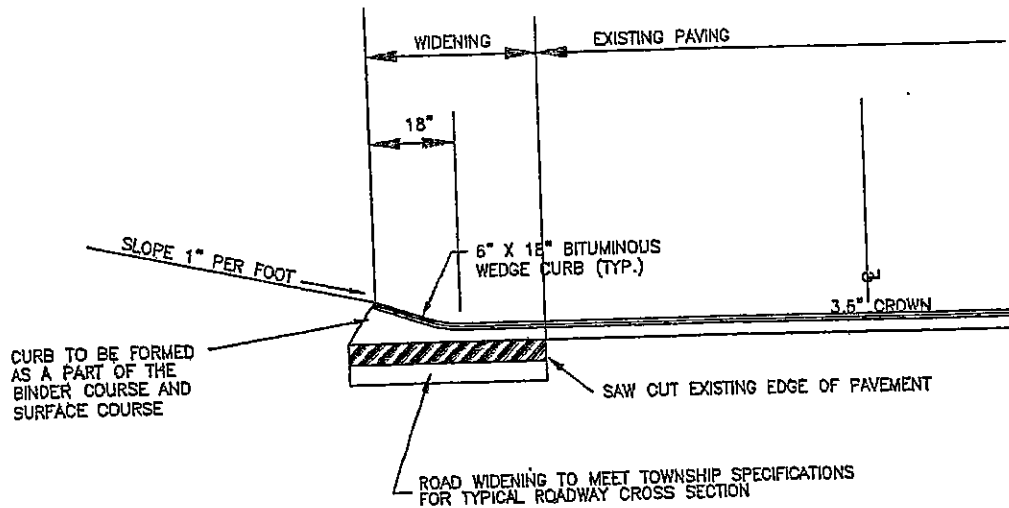

ROAD WIDENING DETAIL

**ROBINSON TOWNSHIP
SPECIFICATIONS**

WASHINGTON COUNTY

PENNSYLVANIA


**TRENCH REPLACEMENT AND
ROAD WIDENING DETAILS**

REVISION	DATE
1	02/19/07

EXHIBIT 8


**HMT
INC.**

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 915-0061

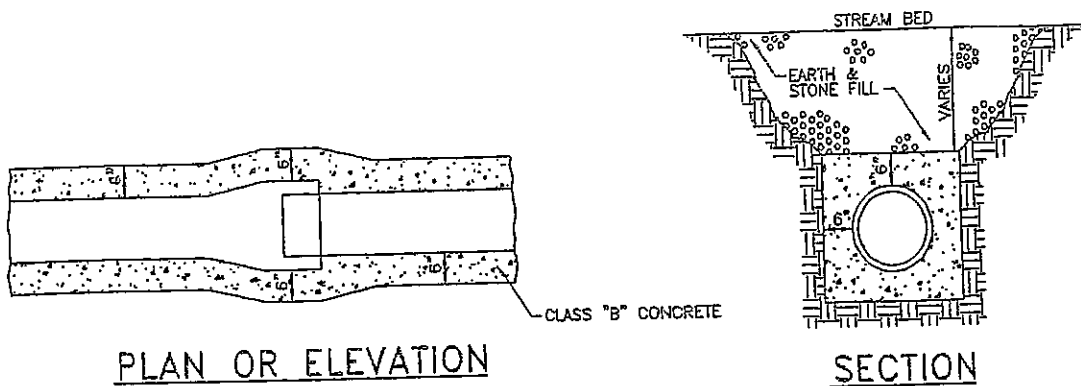


CONCRETE ENCASEMENT

NOT TO SCALE

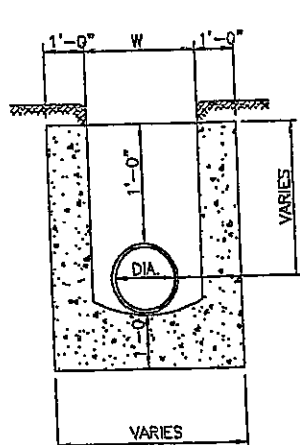

$$W = 4/3 + 16'' \text{ (MIN.)}$$

CONCRETE ANCHORS
(PIPE OVER 19%)

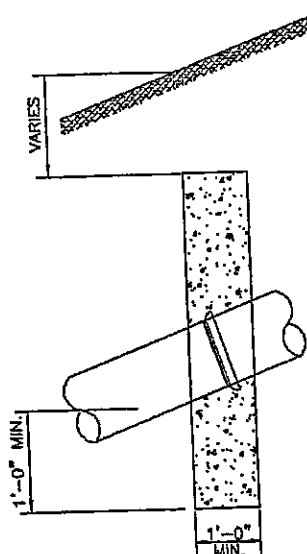

CONCRETE ANCHORS

NOT TO SCALE

SEWERS ON 20% SLOPE OR GREATER SHALL BE ANCHORED WITH
CONCRETE ANCHORS OR EQUAL, SPACED AS FOLLOWS:

- NOT OVER 36 FEET CENTER TO CENTER ON GRADES 20% AND UP TO 35%
- NOT OVER 24 FEET CENTER TO CENTER ON GRADES 35% AND UP TO 50%
- NOT OVER 16 FEET CENTER TO CENTER ON GRADES 50% AND OVER

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA

CONCRETE ENCASEMENT CONCRETE ANCHORS


REVISION	DATE
1	02/19/07

EXHIBIT 9


HMT
INC

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061


OUTSIDE STREET RIGHT-OF-WAY

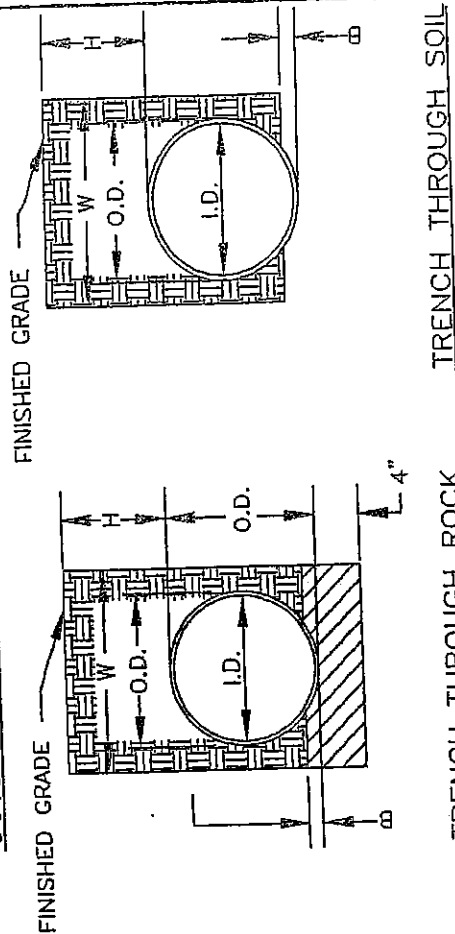

INSIDE STREET RIGHT-OF-WAY

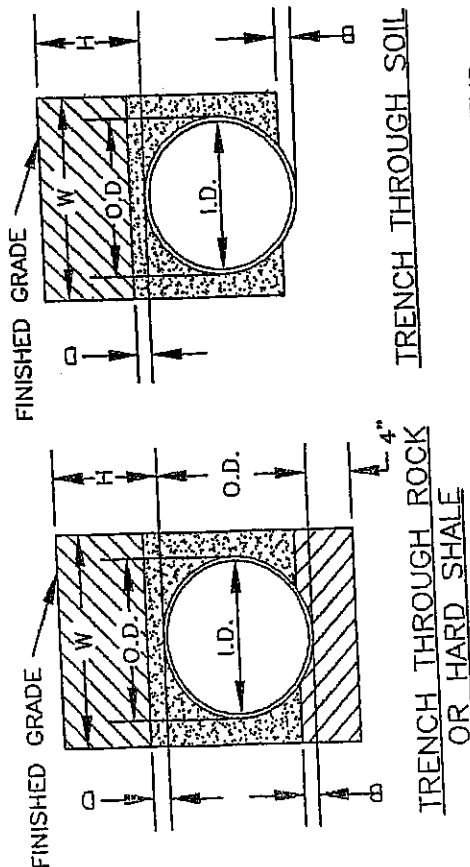

LEGEND



- I.D. - NOMINAL INSIDE DIAMETER OF PIPE
- O.D. - OUTSIDE DIAMETER OF PIPE BARREL OR SHELL
- H.D. - (HUB DIAMETER) OUTSIDE DIAMETER OF PIPE AT BELL OR BAND
- W - 2.0 FT. + H.D. FOR PIPES OR PIPE ARCHES NOT EXCEEDING 48" I.D. OR SPAN, RESPECTIVELY
- B - 2.5 FT. + H.D. FOR PIPES OR PIPE ARCHES EXCEEDING 48" I.D. OR SPAN, RESPECTIVELY
- C - VARIES IN CONFORMANCE WITH CLASS OF BEDDING APPLICABLE TO PIPE INSTALLATION
- D - WHEN UNSUITABLE MATERIAL UNDER THE PIPE HAS BEEN REMOVED, IT SHALL BE REPLACED WITH SUITABLE MATERIAL COMPACTED TO A SATISFACTORY DENSITY, AND THE BED SHAPED AS SPECIFIED IN SECTION 6.31 OF PENNDOT FORM 408.
- H - 1.0 FT. MINIMUM, WHERE PRACTICABLE
- H - HEIGHT OF FILL OVER TOP OF PIPE 2' MINIMUM

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP SPECIFICATIONS


WASHINGTON COUNTY

PENNSYLVANIA

TYPICAL PIPE TRENCH INSTALLATION METHODS FOR STORM SEWER LINES

REVISION	DATE
1	02/19/07

EXHIBIT 10

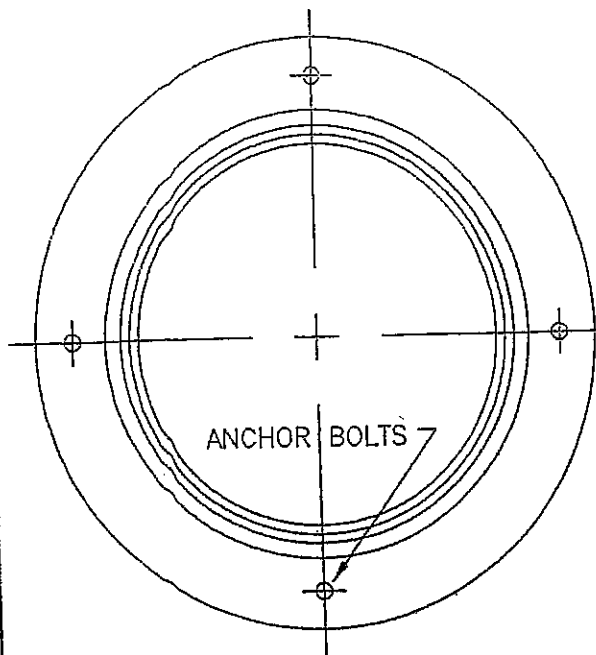

FRAME PLAN

SIZE OF COVERS AND FRAMES				
DIM	TYPE A	TYPE B	TYPE C	TYPE D
OPN'G	22	27	30	36
A	23 3/4	28 3/4	31 3/4	37 3/4
B	5 1/8	7 5/8	9 1/8	12 1/8
C	1 5/8	2	2	2 1/2
D	26	31	34	40
E	22	27	30	36
F	32 1/2	37 1/2	40 1/2	46 1/2


WATER TIGHT MANHOLE, FRAME AND COVER WHERE REQUIRED SHALL BE:

ALLEGHENY FOUNDRY CO. OR APP'D. EQUAL
 FRAME 109
 COVER 110
 SEAL 300


NOTE:

LOCK BAR AND FASTENER TO BE NONCORROSIVE MATERIAL


STANDARD MANHOLE, FRAME AND COVER SHALL BE ALLEGHENY FOUNDRY CO. OR APP'D. EQUAL

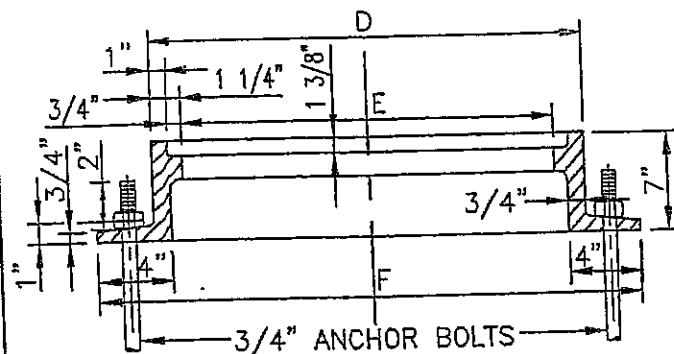

FRAME SECTION

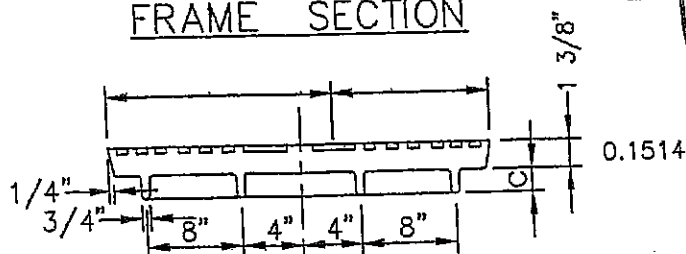

COVER SECTION

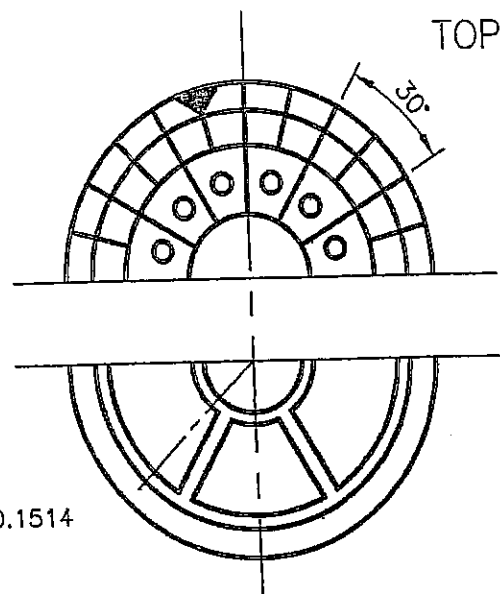

COVER PLAN

LIDS SHALL BE LETTERED "STORM SEWER"
 1-INCH LETTERING

LIDS SHALL BE LETTERED "SANITARY SEWER"
 WHERE APPLICABLE

MANHOLE COVER AND FRAME

ALL MANHOLE COVERS AND FRAME TO BE TYPE "B" UNLESS OTHERWISE NOTED.

**ROBINSON TOWNSHIP
 SPECIFICATIONS**

WASHINGTON COUNTY

PENNSYLVANIA


MANHOLE COVER AND FRAME

REVISION DATE
 1 02/19/07

EXHIBIT 11

**HMT
 INC.**

AND ASSOCIATES
 130 CECIL STREET
 CANONSBURG, PA. 15317
 (724) 916-0061

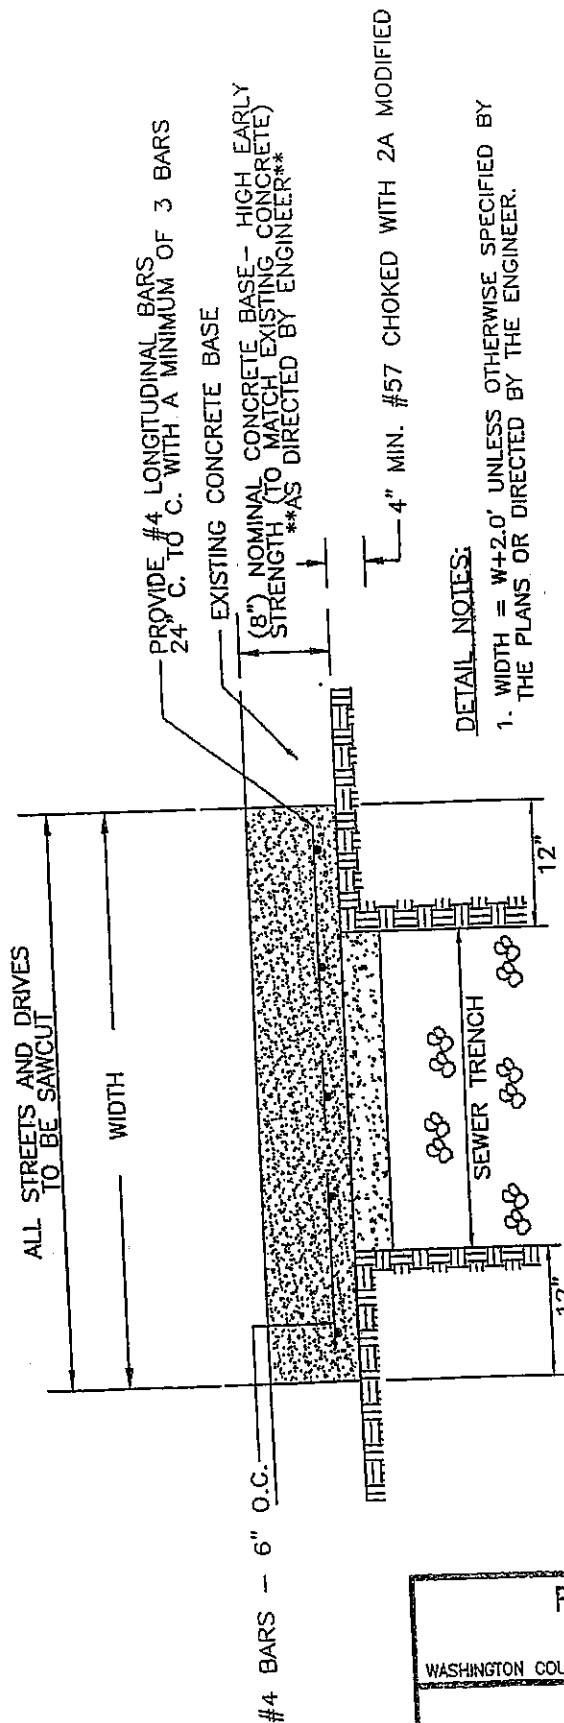

DETAIL NOTES:

1. WIDTH = W+2.0' UNLESS OTHERWISE SPECIFIED BY THE PLANS OR DIRECTED BY THE ENGINEER.

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

**ROBINSON TOWNSHIP
SPECIFICATIONS**

WASHINGTON COUNTY

PENNSYLVANIA

**REINFORCED CONCRETE
TRENCH REPLACEMENT**

REVISION	DATE
1	02/19/07

EXHIBIT 12

PRECAST CONCRETE MANHOLES MEET OR EXCEED
THE A.S.T.M. C 478 SPECIFICATIONS FOR
PRECAST REINFORCED CONCRETE MANHOLE
RISERS AND TOPS.

CONCRETE STANDARD SPECIFICATIONS:
CONCRETE - 4000 P.S.I.

REINFORCING - 6" x 6" GA. x 6 GA.
(DOUBLE CAGE)


JOINT - 4 1/4" TONGUE AND GROOVE
(WITH "O" RING RUBBER GASKET)

WALL THICKNESS - 6" MINIMUM

WEIGHT - 650 LBS. PER FOOT


NOTE: PLACE 2 LAYERS OF KENT SEAL OR EQUAL
BETWEEN ALL MANHOLE SECTIONS.

COAL TAR EPOXY COATING TO BE APPLIED TO ALL
EXTERNAL MANHOLE SEGMENTS PRIOR TO INSTALLATION

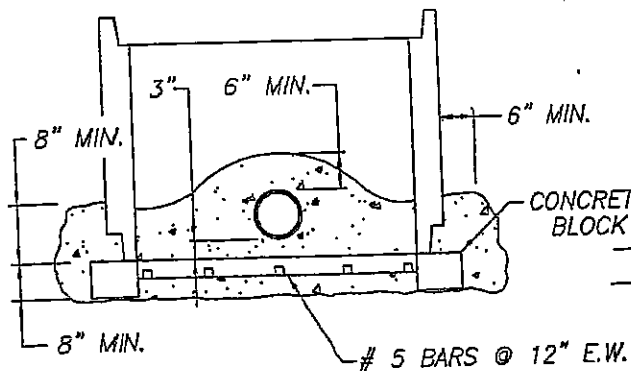


CAST-IN-PLACE BASE

* USE ONLY WHERE PRE-APPROVED

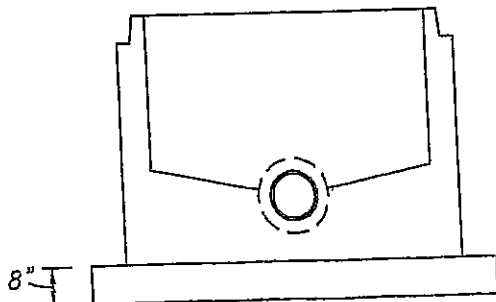

PRECAST BASE

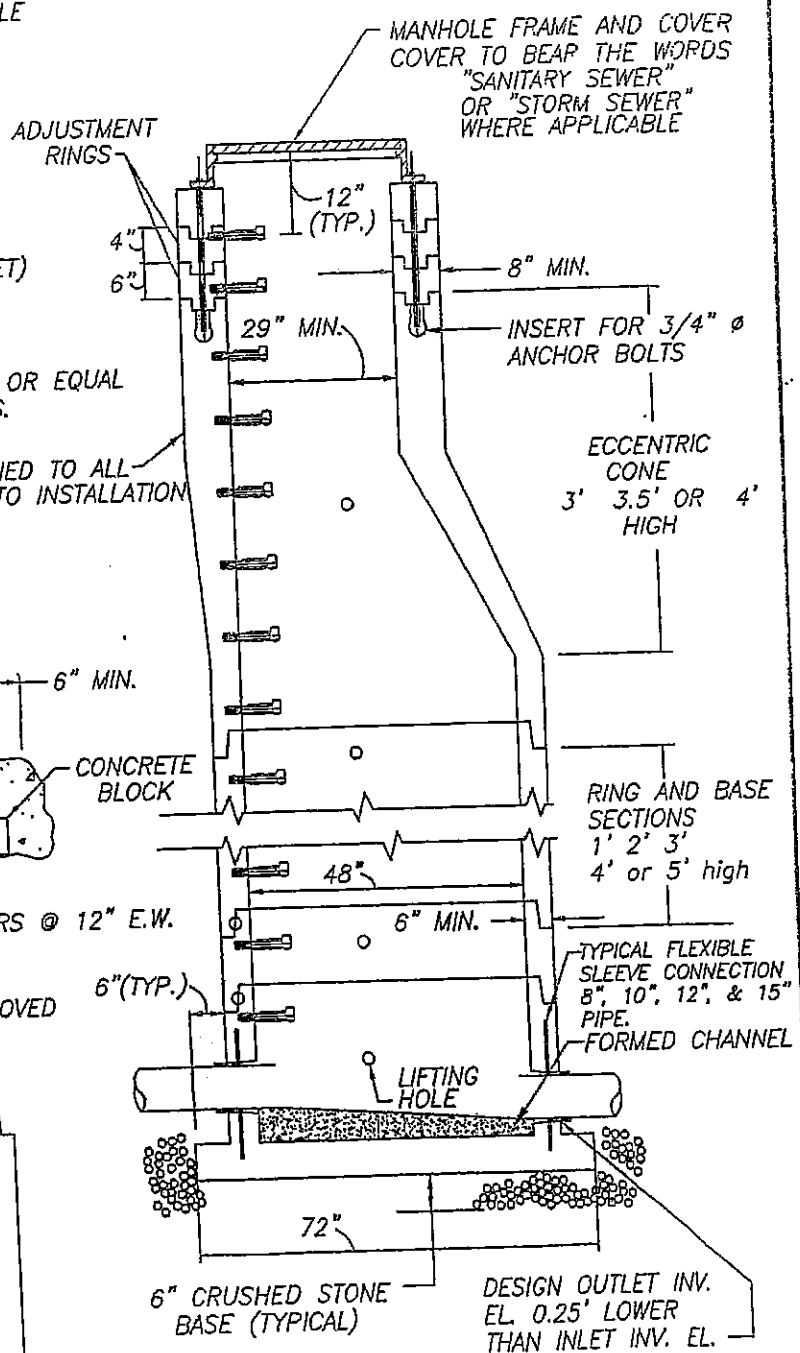

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA


TYPICAL PRECAST MANHOLE DETAIL

REVISION	DATE
1	02/19/07

EXHIBIT 13

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 816-0061

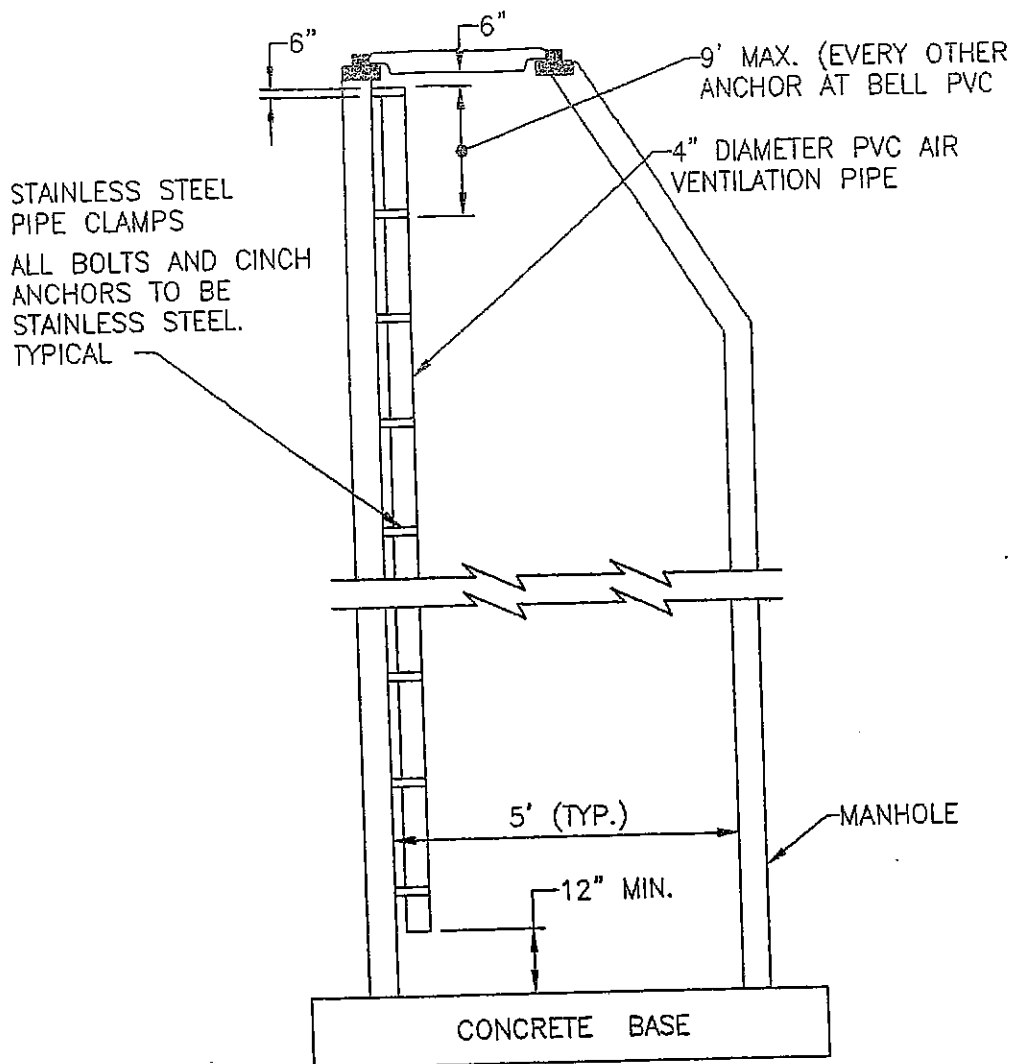

MATERIALS: = 1-INCH x 1/8-INCH 304 STAINLESS STEEL BARSTOCK IN U SHAPED BRACKET SIZED FOR 4-INCH SCHEDULE 40 PVC PIPE WITH PREDRILLED BOLT HOLES ON BRACKETS WINGS.

= STAINLESS STEEL CINCH ANCHORS

= 1/2" STAINLESS STEEL BOLTS

SUPPLIER: CORAPOLIS LIGHT METAL, INC.
1221 THIRD AVENUE
CORAPOLIS, PA 15108
(412) 264-2252
OR
MACHINE SHOP OF CONTRACTOR'S CHOICE

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY


PENNSYLVANIA

MANHOLE VENTILATION PIPE DETAIL (FOR MH OVER 15 FEET DEEP)

REVISION	DATE
1	02/19/07

EXHIBIT 14

HMT AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

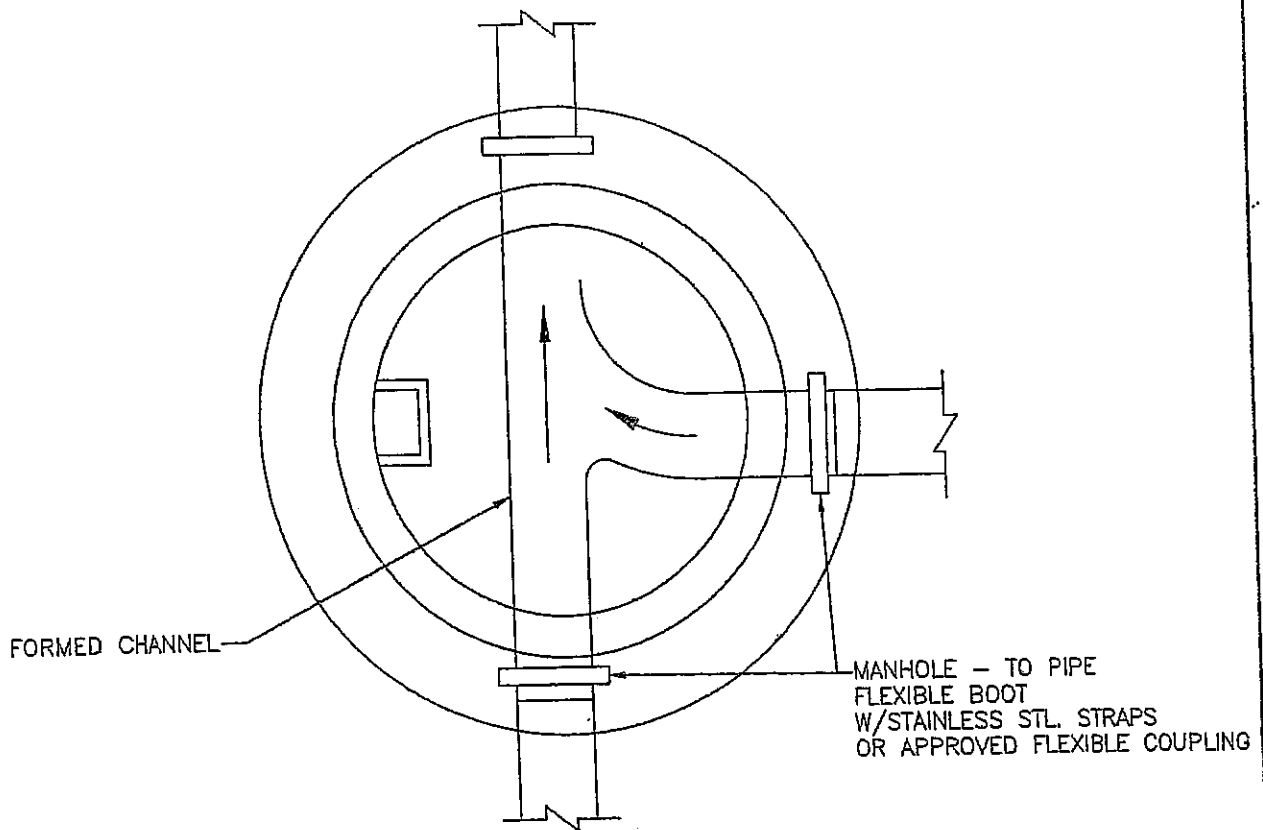

SECTIONAL PLAN

ROBINSON TOWNSHIP
SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA


FORMED INVERT CHANNEL

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 816-0061

REVISION	DATE
1	02/19/07

EXHIBIT 15

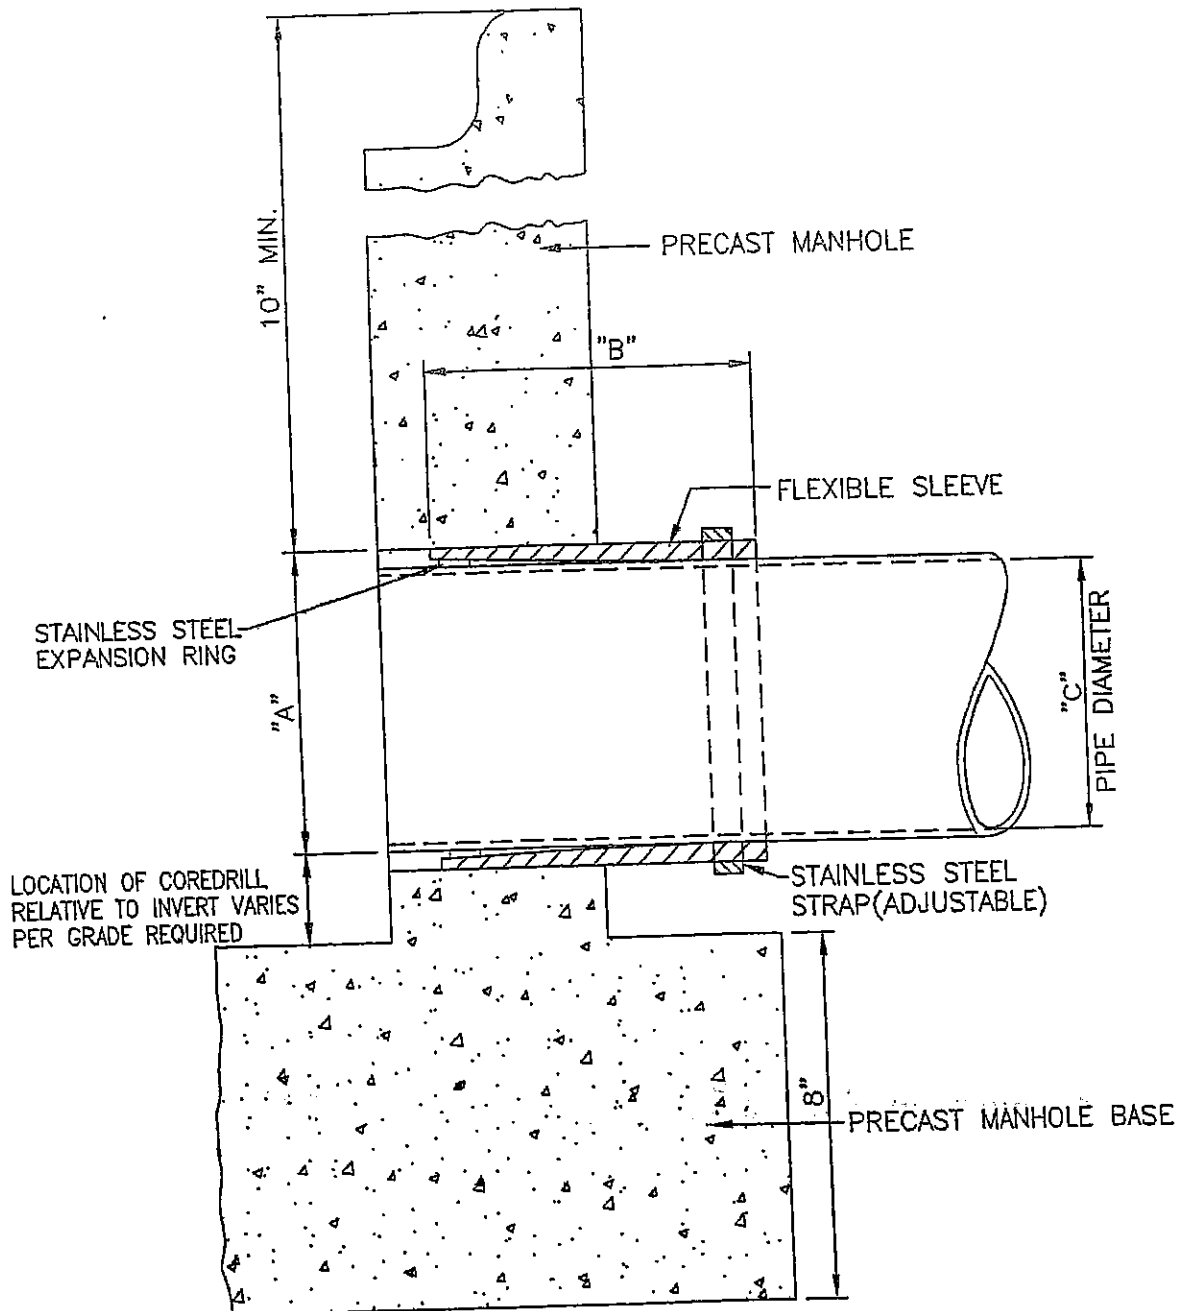

"A" HOLE SIZE	B" BOOT LENGTH	"C" PIPE O.D.
11"	8"	5.70" TO 6.90"
11"	6"	8.10" TO 9.05"
11"	8"	8.00" TO 9.05"
11"	6"	8.50" TO 9.05"
11"	9"	8.50" TO 9.05"
12"	8"	5.70" TO 6.90"
12"	6"	8.10" TO 9.10"
12"	8"	8.00" TO 9.10"
12"	6"	9.40" TO 10.25"
12"	9"	9.40" TO 10.25"

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP SPECIFICATIONS


WASHINGTON COUNTY

PENNSYLVANIA


COREDRILLED MANHOLE CONNECTION FOR ALL PIPE

REVISION	DATE
1	02/19/07


EXHIBIT 16

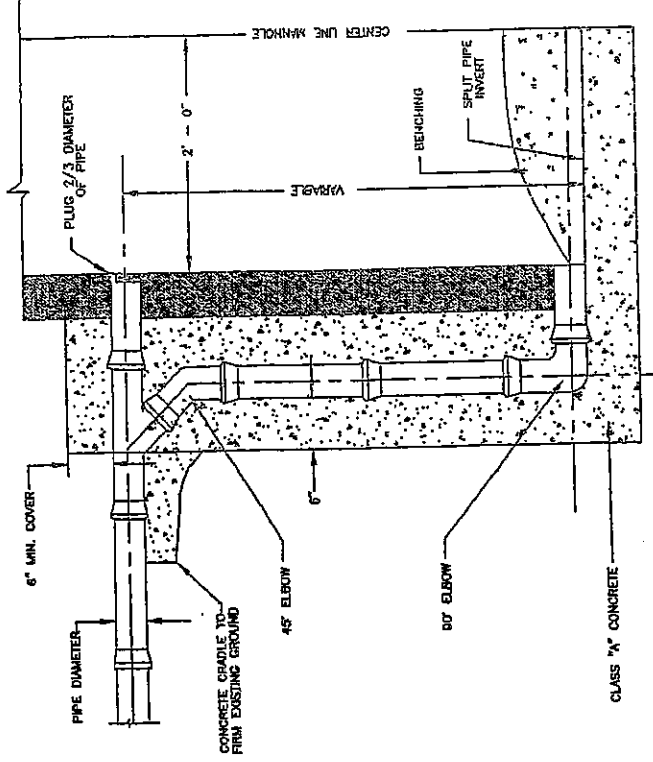

TYPE "A" STRAIGHT LINE FLOW

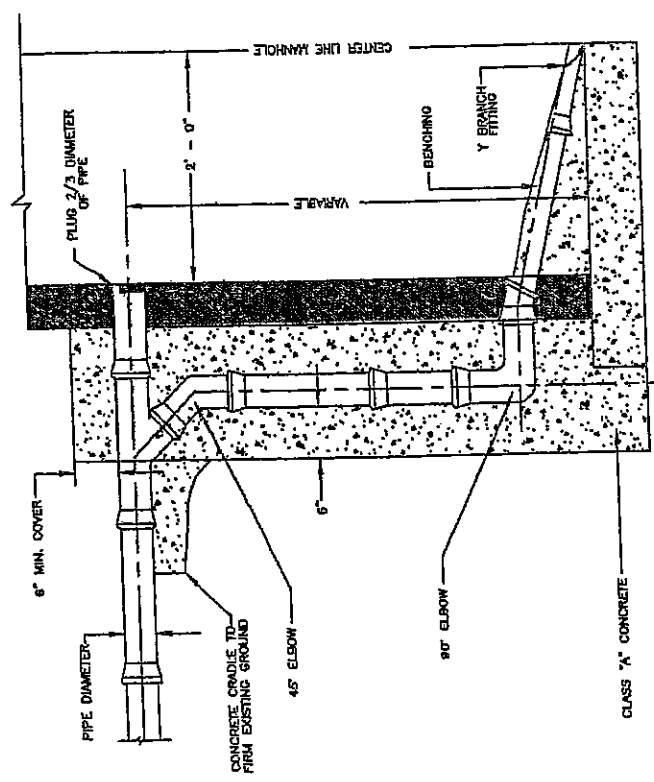

TYPE "A" SIDE ENTRANCE FLOW

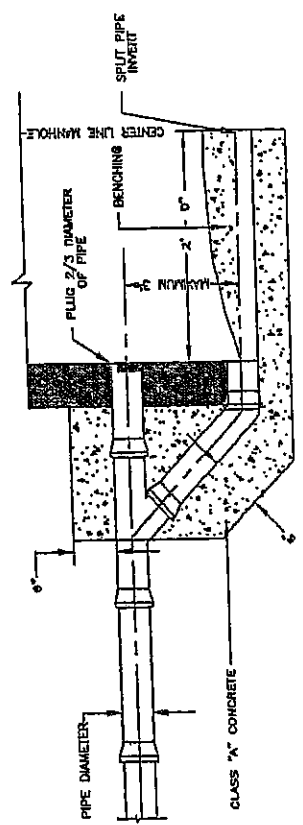

TYPE "B" STRAIGHT LINE FLOW

DETAIL NOTE
A DROP CONNECTION SHALL BE CONSTRUCTED WHEN
THE DIFFERENCE IN ELEVATION BETWEEN THE INLET
INVERT AND CHANNEL IS 2.0 FEET AND OVER

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP
SPECIFICATIONS


WASHINGTON COUNTY

PENNSYLVANIA

SANITARY CONNECTION FOR
DROP MANHOLE

REVISION	DATE
1	02/19/07

EXHIBIT 17

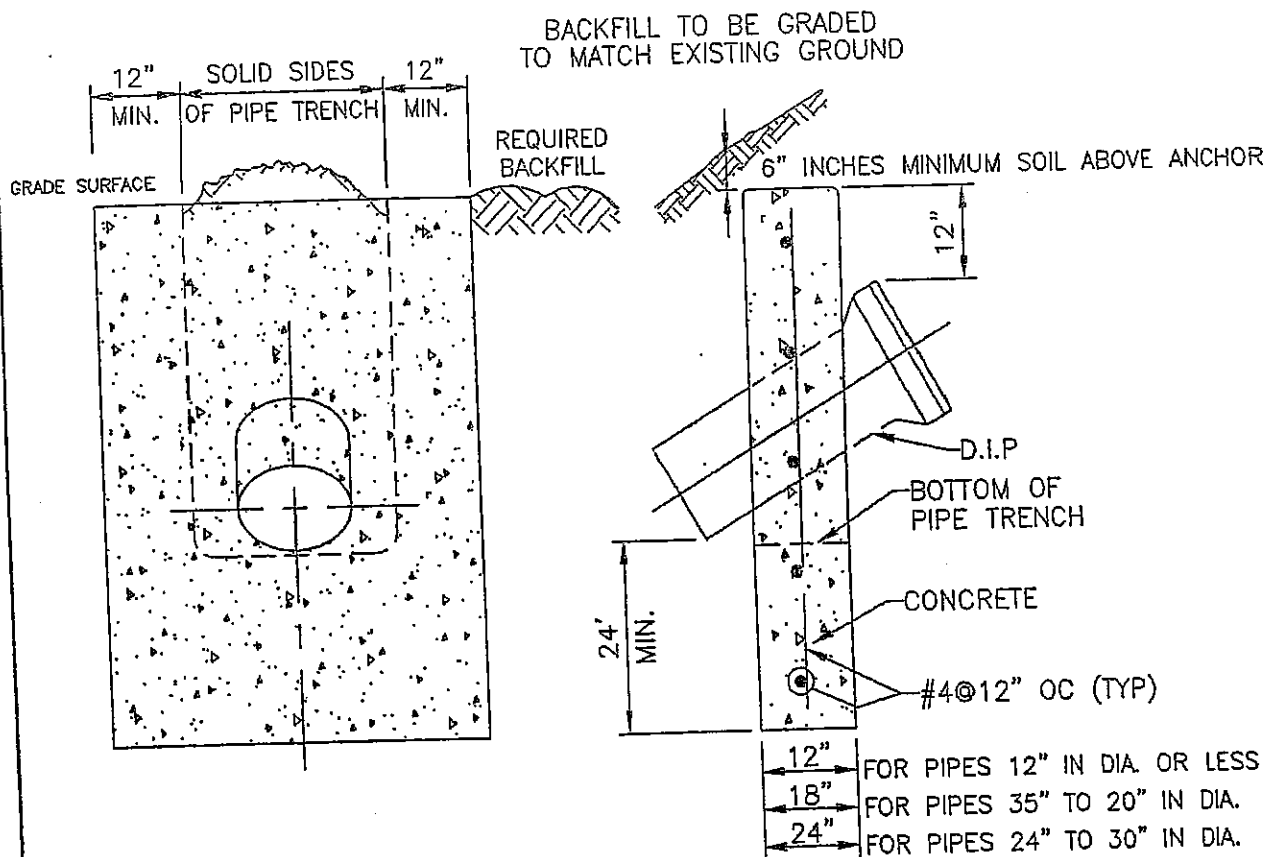

NOTE:

CONCRETE ANCHORS FOR PIPES ON STEEP GRADES

PROVIDE NO ANCHORS ON GRADES LESS THAN 20% UNLESS NOTED
 PROVIDE ANCHORS 36' C TO C ON GRADES BETWEEN 20% AND 35%
 PROVIDE ANCHORS 24' C TO C ON GRADES BETWEEN 35% AND 50%
 PROVIDE ANCHORS 16' C TO C ON GRADES BETWEEN 50% AND 70%
 FOR CONDITIONS OTHER THAN SHOWN HERE ON ANCHORS SHALL BE PROVIDED
 AS REQUIRED BY THE CONTRACT PLANS OR ORDERED IN THE FIELD BY THE
 ENGINEER.

ROBINSON TOWNSHIP
 SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA



CONCRETE ANCHORS
 FOR PIPES ON STEEP GRADES

REVISION	DATE
1	02/19/07

EXHIBIT 18

HMT
 INC.

AND ASSOCIATES
 130 CECIL STREET
 CANONSBURG, PA. 15317
 (724) 916-0061

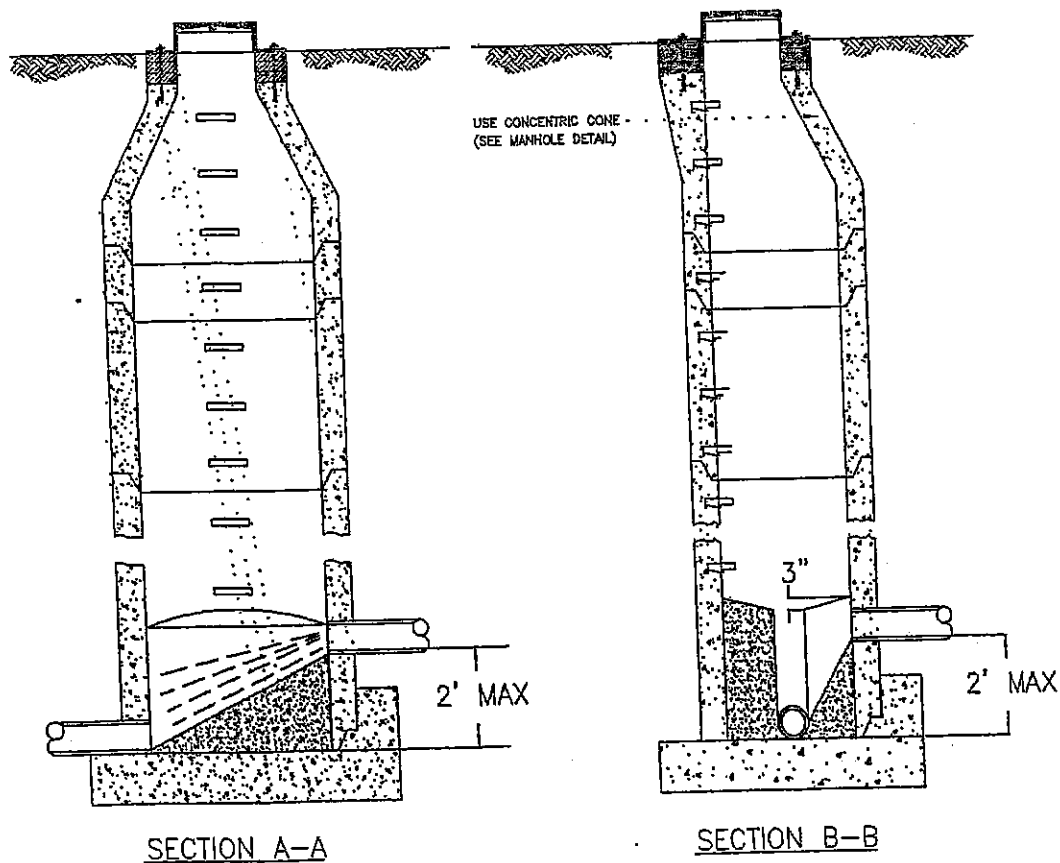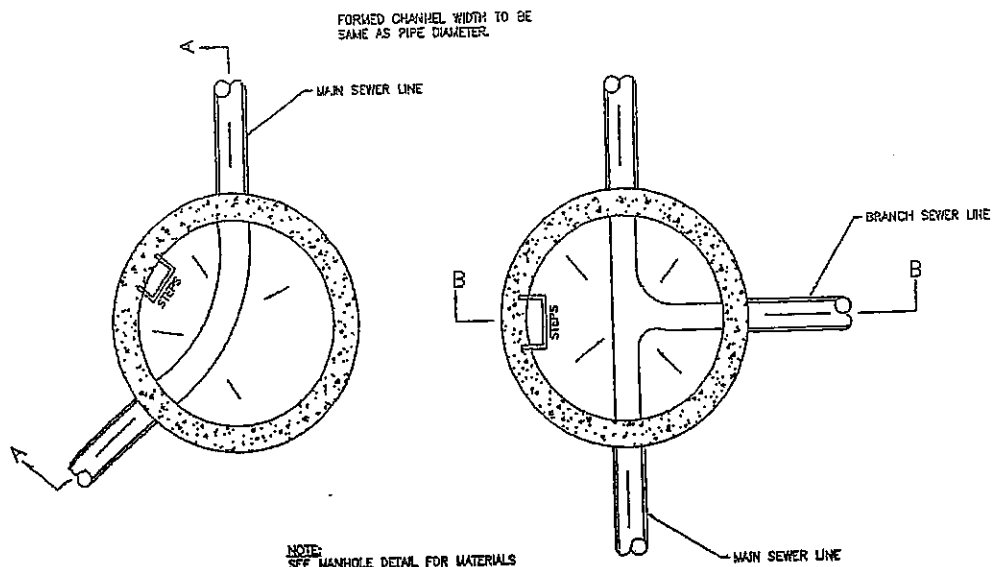

NOTE:
DROP CONNECTION REQUIRED WHEN 2'-0" OR GREATER.

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA

SPLASH INVERT DETAIL


HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

REVISION	DATE
1	02/19/07

EXHIBIT 19

NOTE: 6 INCH PIPE AND FITTINGS SHALL BE USED IF SLOPE IS LESS THEN 2%

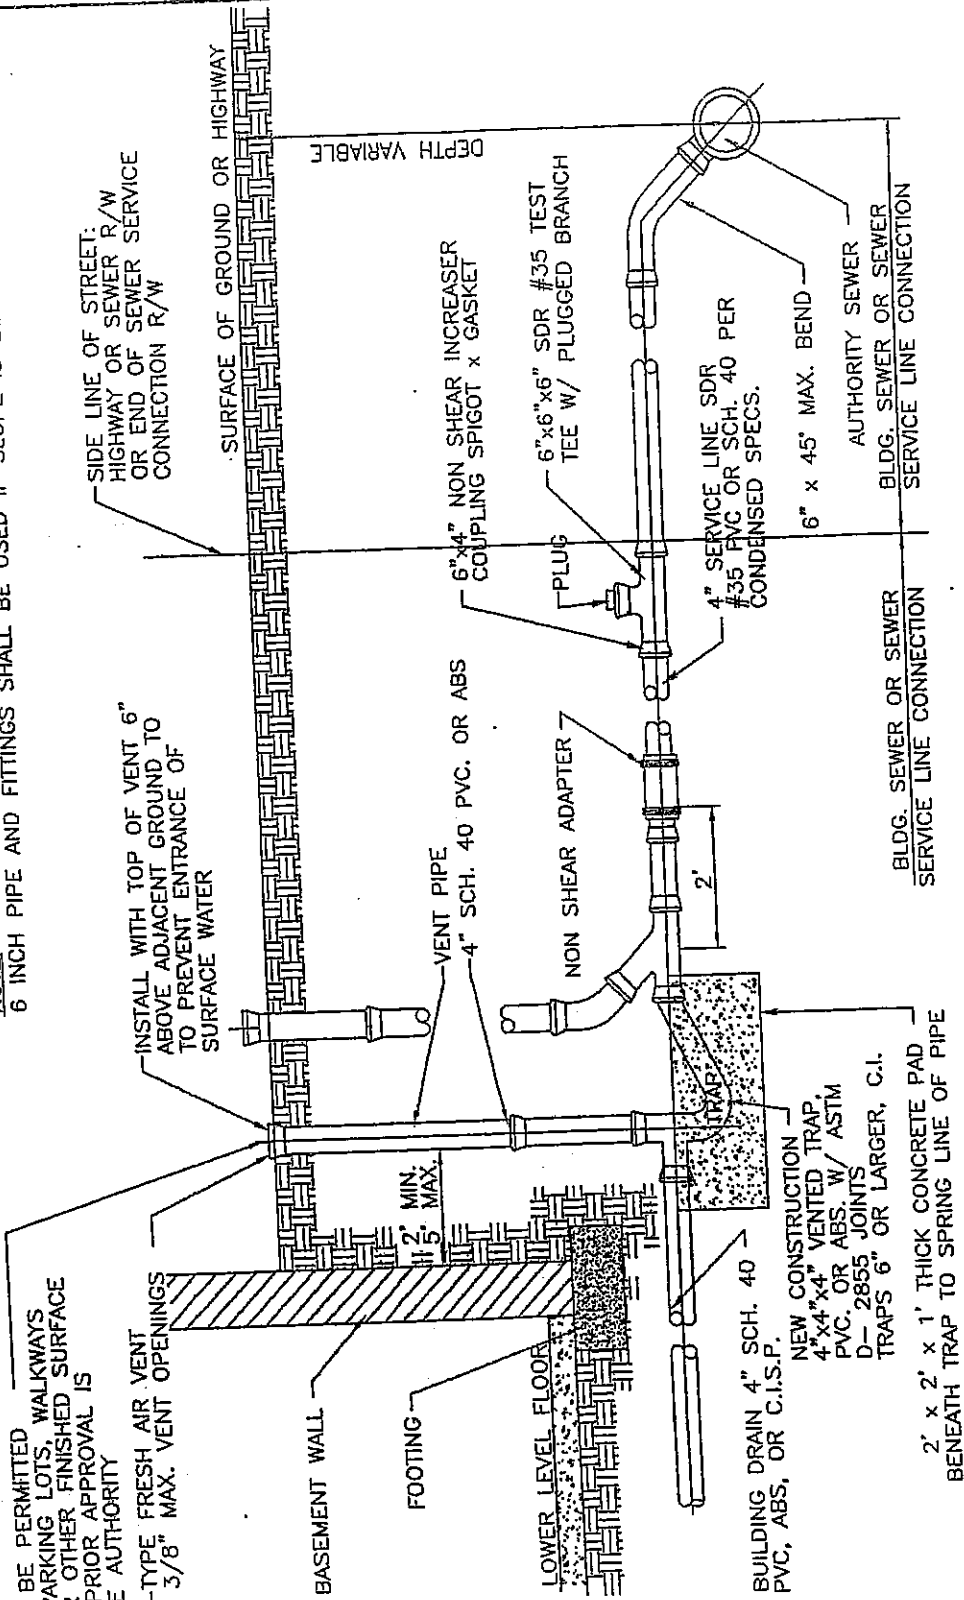

NO VENT SHALL BE PERMITTED IN DRIVEWAYS, PARKING LOTS, WALKWAYS, CART PATHS, OR OTHER FINISHED SURFACE AREAS UNLESS PRIOR APPROVAL IS GRANTED BY THE AUTHORITY

PITTSBURGH-TYPE FRESH AIR VENT CASTING W/ 3/8" MAX. VENT OPENINGS

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY PENNSYLVANIA


RESIDENTIAL SANITARY SEWER SERVICE LINE CONNECTION

REVISION	DATE
1	02/19/07

EXHIBIT 20

HMT AND ASSOCIATES
 130 CECIL STREET
 CANONSBURG, PA. 15317
 (724) 916-0061

DUCTILE IRON PIPE INSTALLATION (OVER 15' DEEP)

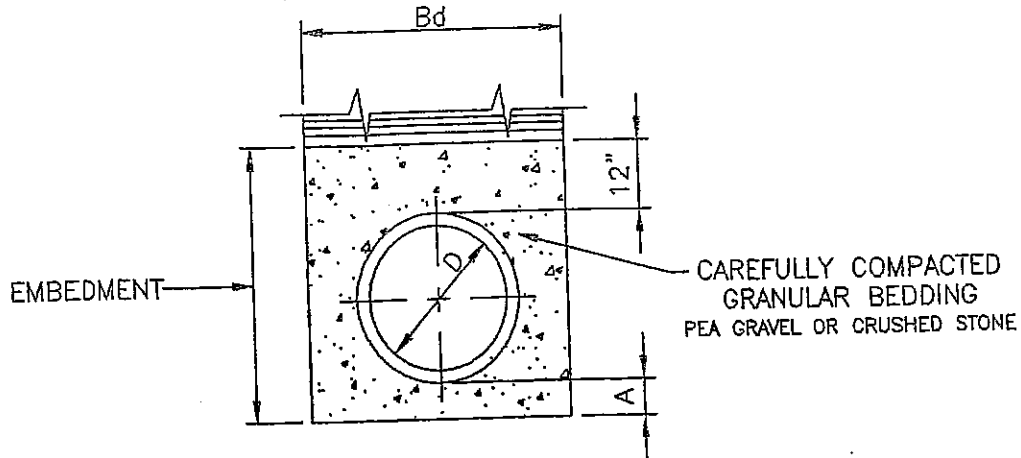

GRANULAR EMBEDMENT TYPE - B-2

MAX. TRENCH WIDTH

Bd MAX. TRENCH WIDTH
A MIN. DEPTH OF BEDDING

SCHEDULE		
D	MAX. Bd.	A
6"	24"	6"
8"	26"	6"
10"	28"	6"
12"	30"	6"
15"	36"	6"
18"	39"	6"
21"	44"	6"
24"	48"	6"
27"	50"	6"
30"	53"	6"
36"	60"	6"

NOTE:

IF MAX. TRENCH WIDTH IS EXCEEDED, ADDITIONAL OR ALTERNATE BEDDING, AS APPROVED BY THE ENGINEER, WILL BE REQUIRED AT THE CONTRACTORS EXPENSE

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA

TRENCH DETAIL
FOR TRENCH OVER 15 FEET DEEP
(USE DUCTILE IRON PIPE)

HMT
INC


AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0081

REVISION DATE
1 02/19/07


EXHIBIT 21

PIPE DIAMETER	A	B	C	D	E	F
15"	2'-6"	9"	2'-0"	12"	1'-9"	9"
18"	2'-6"	9"	2'-0"	12"	2'-0"	9"
24"	3'-3"	9"	2'-0"	12"	2'-6"	9"
30"	4'-0"	12"	2'-6"	15"	3'-0"	12"
36"	4'-8"	12"	2'-6"	15"	3'-6"	12"
42"	5'-3"	15"	4'-3"	18"	4'-0"	15"
48"	5'-9"	15"	4'-9"	21"	4'-6"	15"
54"	6'-3"	15"	5'-3"	24"	5'-0"	15"
60"	7'-0"	15"	5'-9"	2'-3"	5'-6"	18"
66"	7'-8"	18"	7'-0"	2'-6"	6'-0"	18"
72"	8'-0"	18"	7'-0"	2'-6"	6'-6"	18"
84"	9'-0"	18"	8'-3"	2'-9"	7'-6"	18"

NOTE: DRAWINGS FOR ALL PRECAST HEADWALLS, ENDWALLS OR CONCRETE SHOP SECTION MUST BE SUBMITTED FOR APPROVAL BY THE TOWNSHIP

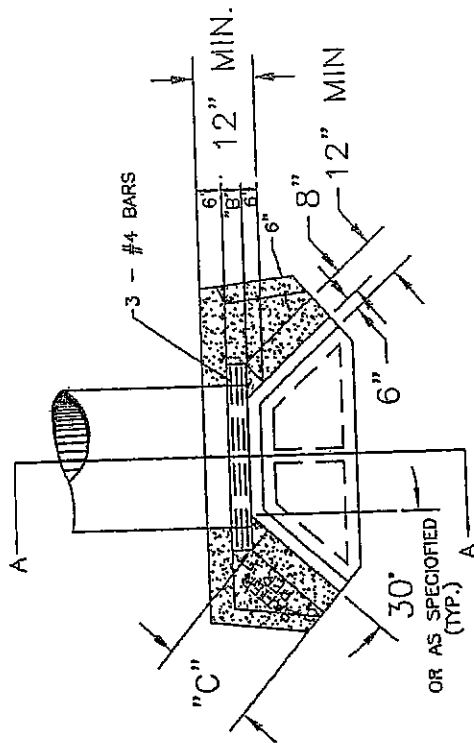

PLAN VIEW

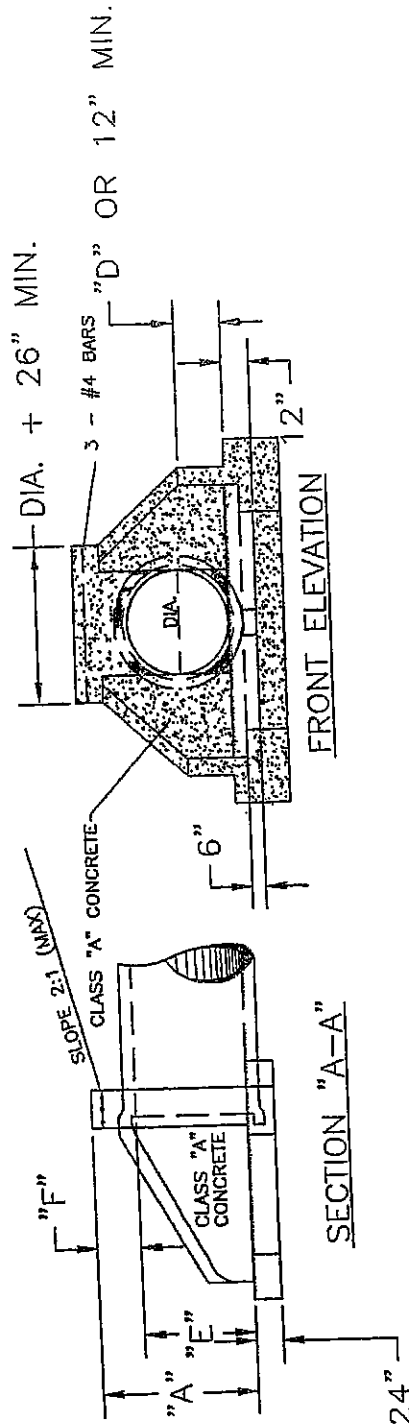

NOTE: LINE THE BOTTOM AND THE SIDES OF THE DITCH BELOW THE ENDWALL WITH RIP RAP AS NECESSARY TO PROVIDE EROSION CONTROL. ALL RIP RAP SHALL BE LIMESTONE.

HMT
INC.



AND ASSOCIATES
130 CECIL STREET
CANDANBURG, PA. 15317
(724) 916-0061

ROBINSON TOWNSHIP
SPECIFICATIONS
WASHINGTON COUNTY PENNSYLVANIA

ENDWALL / HEADWALL DETAIL

REVISION	DATE
1	02/19/07

EXHIBIT 22

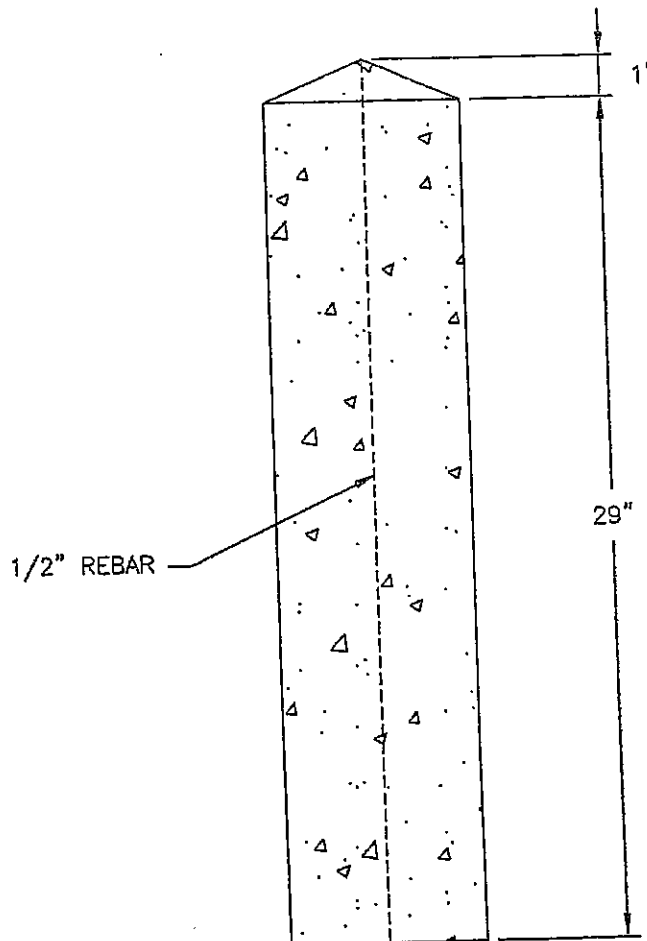


NOTE:
 OTHER MONUMENT DESIGNS MAY BE ACCEPTED
 UPON SUBMISSION TO THE PLANNING COMMISSION

ROBINSON TOWNSHIP SPECIFICATIONS	
WASHINGTON COUNTY	PENNSYLVANIA
CONCRETE MONUMENT	
REVISION	DATE
1	02/19/07


HMT
INC.

AND ASSOCIATES
 130 CECIL STREET
 CANONSBURG, PA. 15317
 (724) 916-0061


EXHIBIT 23



PLAN

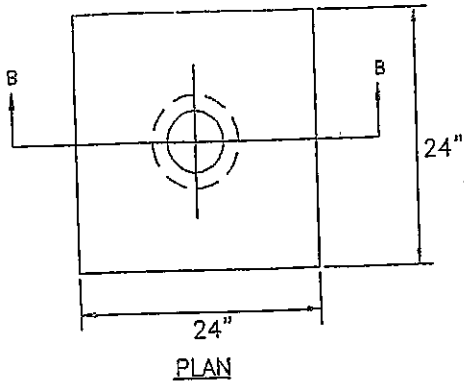

PLAN




SECTION A-A

CLEANOUT COVER



NOTE:

PRE-APPROVAL BY TOWNSHIP IS REQUIRED
CLEANOUT COVERS SHALL BE LOCKED WITH
ONE 3/8" HEX HEAD STAINLESS STEEL BOLT
AND SHALL BE MODEL R-1976 AS MANUFACTURED
BY NEENAH FOUNDRY.

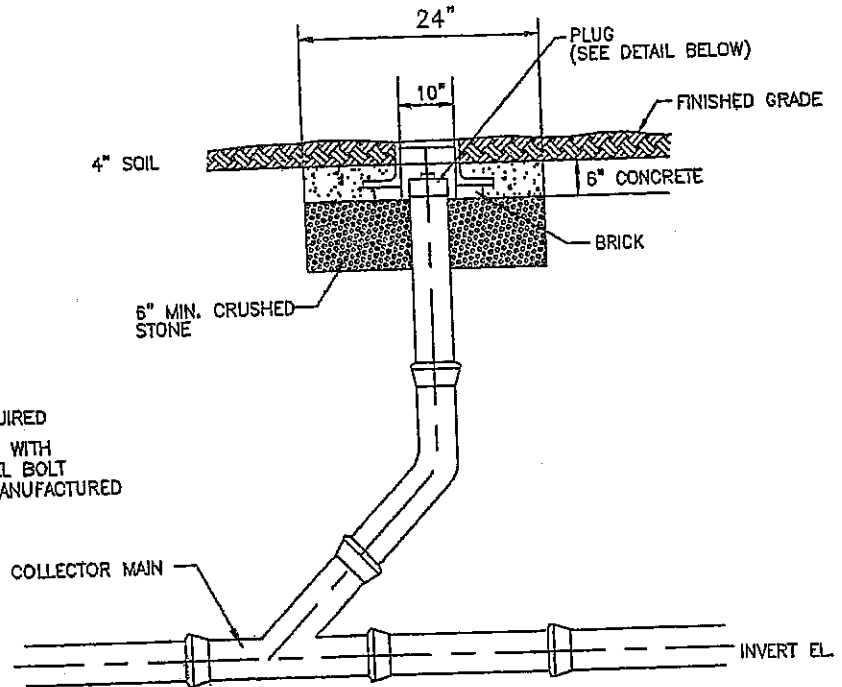

SECTION B-B

CONCRETE PAD & CASTING DETAIL

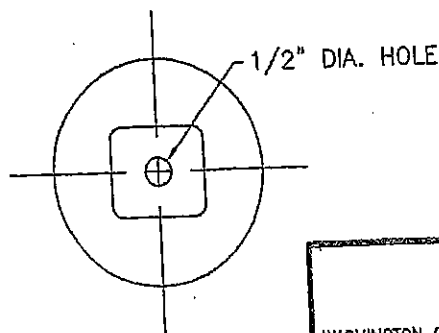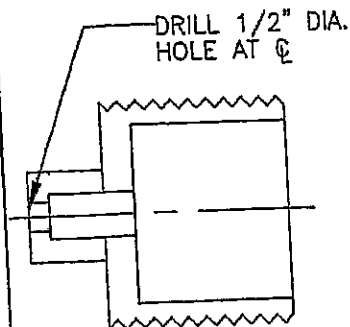

PLUG DETAIL

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0061

**ROBINSON TOWNSHIP
SPECIFICATIONS**


WASHINGTON COUNTY

PENNSYLVANIA


**LAMPHOLE DETAIL FOR
LAWN / UNIMPROVED AREAS**

REVISION	DATE
1	02/19/07

EXHIBIT 24




PLAN

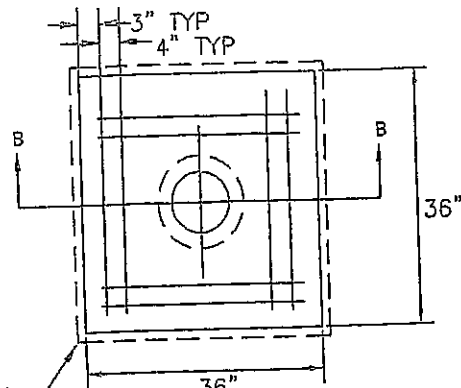


PLAN

INSTALL EXPANSION JOINT BETWEEN
PAD AND SURROUNDING PAVEMENT



SECTION A-A

CLEANOUT COVER


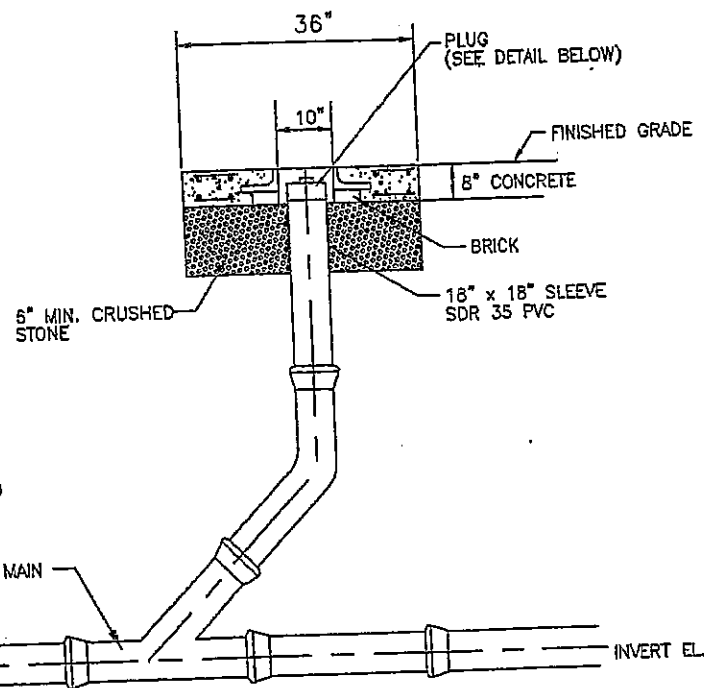


SECTION B-B

CONCRETE PAD & CASTING DETAIL

NOTE:

PRE-APPROVAL BY TOWNSHIP IS REQUIRED
CLEANOUT COVERS SHALL BE LOCKED WITH
ONE 3/8\"/>

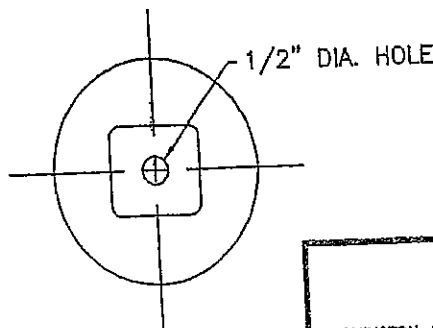

PLUG DETAIL

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 816-0061

**ROBINSON TOWNSHIP
SPECIFICATIONS**




WASHINGTON COUNTY

PENNSYLVANIA

**LAMPHOLE DETAIL FOR
PAVED / IMPERVIOUS AREAS**

REVISION	DATE
1	02/18/07

EXHIBIT 25

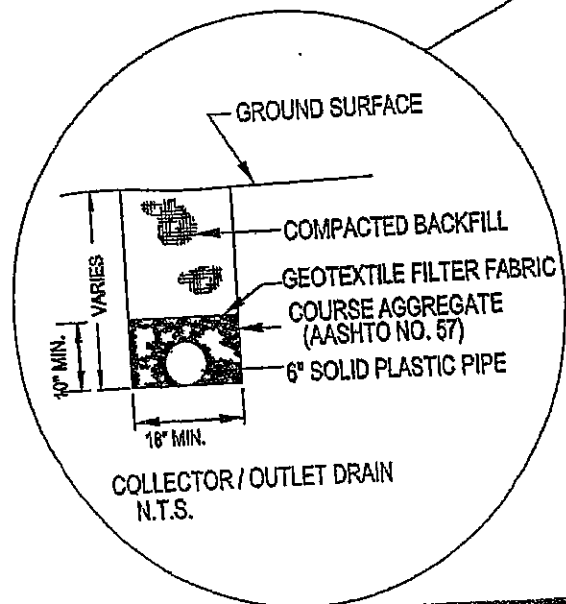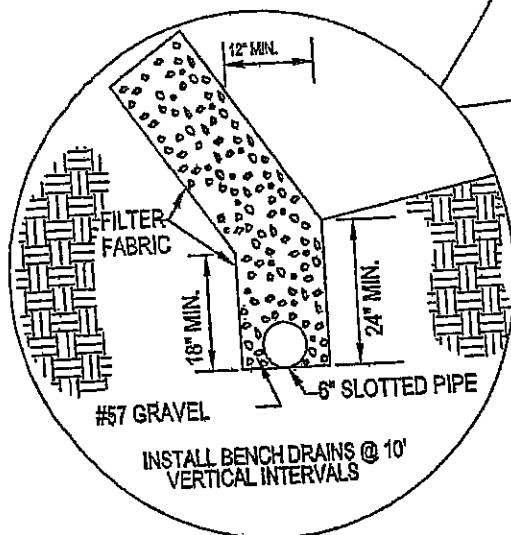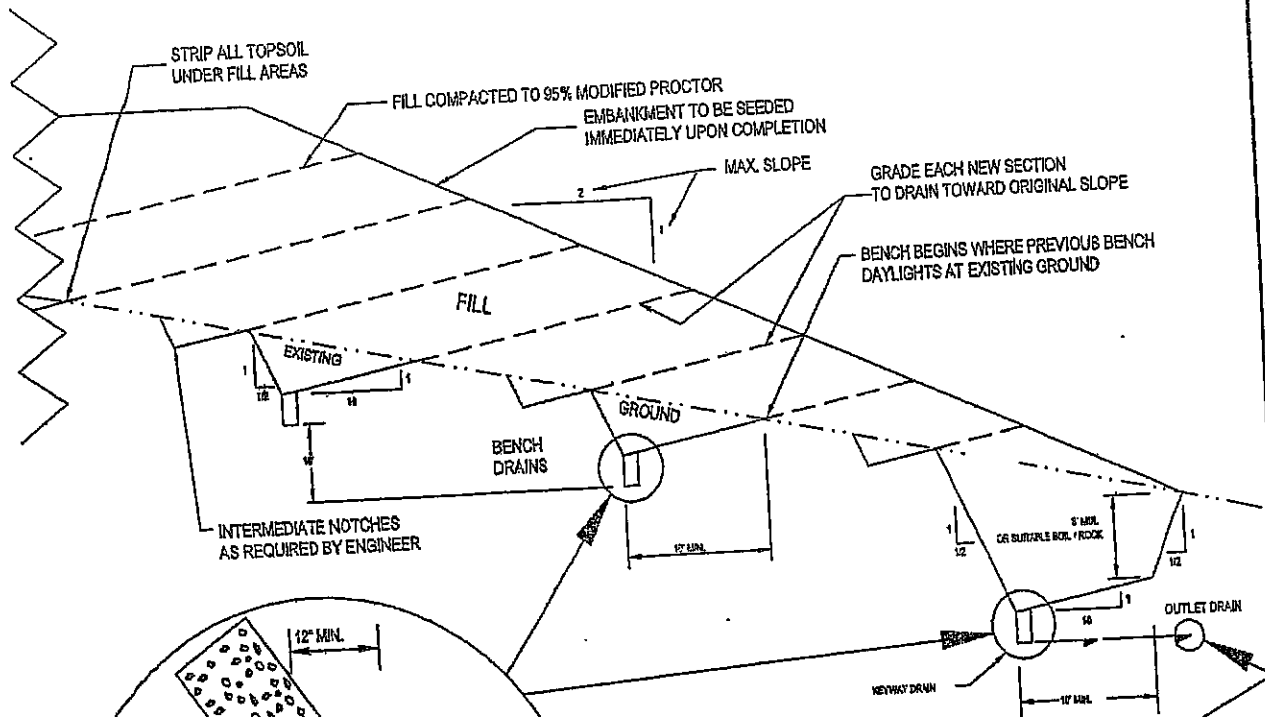

ROBINSON TOWNSHIP SPECIFICATIONS

WASHINGTON COUNTY

PENNSYLVANIA

KEYWAY / BENCH DETAIL

HMT
INC.

AND ASSOCIATES
130 CECIL STREET
CANONSBURG, PA. 15317
(724) 916-0051

REVISION	DATE
1	02/19/07

EXHIBIT 26

C

C

C

STORMWATER MANAGEMENT ORDINANCE

Implementing the Requirements of the
Washington County Stormwater Management Plan

ORDINANCE NO. 01-11 OF 2011

Robinson Township, WASHINGTON COUNTY, PENNSYLVANIA

Adopted at a Public Meeting Held on
May, 9, 2011

TABLE OF CONTENTS

ARTICLE I – GENERAL PROVISIONS	1
SECTION 101. SHORT TITLE	1
SECTION 102. STATEMENT OF FINDINGS	1
SECTION 103. PURPOSE	1
SECTION 104. STATUTORY AUTHORITY.....	2
SECTION 105. APPLICABILITY	2
SECTION 106. REPEALER.....	3
SECTION 107. SEVERABILITY	3
SECTION 108. COMPATIBILITY WITH OTHER ORDINANCE REQUIREMENTS.....	3
SECTION 109. DUTY OF PERSONS ENGAGED IN THE DEVELOPMENT OF LAND.....	3
SECTION 110. MUNICIPAL LIABILITY DISCLAIMER	3
 ARTICLE II – DEFINITIONS.....	 4
ARTICLE III – STORMWATER MANAGEMENT STANDARDS	13
SECTION 301. GENERAL PROVISIONS.....	13
SECTION 302. EXEMPTIONS/MODIFICATIONS.....	15
SECTION 303. WAIVERS	17
SECTION 304. VOLUME CONTROLS.....	19
SECTION 305. RATE CONTROLS	20
 ARTICLE IV – E&S STANDARDS	 21
SECTION 401. Erosion and Sedimentation Requirements During Earth Disturbance Activities	21
 ARTICLE V – PROTECTED WATERSHED STANDARDS.....	 22
SECTION 501. RESERVED	22
 ARTICLE VI – RIPARIAN BUFFER STANDARDS	 23
SECTION 601. RIPARIAN BUFFER REQUIREMENTS.....	23
SECTION 602. RIPARIAN BUFFER EASEMENTS.....	24
 ARTICLE VII – DESIGN CRITERIA.....	 25
SECTION 701. DESIGN CRITERIA FOR STORMWATER MANAGEMENT & DRAINAGE FACILITIES	25
SECTION 702. CALCULATION METHODOLOGY	26
SECTION 703. Downstream Hydraulic Capacity Analysis.....	27
 ARTICLE VIII – SWM SITE PLAN & REPORT REQUIREMENTS	 30
SECTION 801. GENERAL REQUIREMENTS	30
SECTION 802. SWM SITE PLAN & REPORT CONTENTS	30
SECTION 803. SWM SITE PLAN & REPORT SUBMISSION	34
SECTION 804. SWM SITE PLAN & REPORT REVIEW.....	34
SECTION 805. MODIFICATION OF PLANS	35
SECTION 806. RESUBMISSION OF DISAPPROVED SWM SITE PLAN & REPORT.....	35
SECTION 807. AUTHORIZATION TO CONSTRUCT AND TERM OF VALIDITY	35
SECTION 808. RECORD DRAWINGS, COMPLETION CERTIFICATE & FINAL INSPECTION.....	35
 ARTICLE IX – EASEMENTS.....	 36
SECTION 901. EASEMENTS	36
 ARTICLE X – MAINTENANCE RESPONSIBILITIES.....	 37
SECTION 1001. FINANCIAL GUARANTEE.....	37
SECTION 1002. MAINTENANCE RESPONSIBILITIES.....	37
SECTION 1003. MAINTENANCE AGREEMENT FOR PRIVATELY OWNED STORMWATER FACILITIES.....	38

ARTICLE XI – INSPECTIONS	39
SECTION 1101. SCHEDULE OF INSPECTIONS	39
SECTION 1102. RIGHT OF ENTRY	39
ARTICLE XII – ENFORCEMENT AND PENALTIES	40
SECTION 1201. NOTIFICATION	40
SECTION 1202. ENFORCEMENT	40
SECTION 1203. PUBLIC NUISANCE	40
SECTION 1204. SUSPENSION AND REVOCATION	40
SECTION 1205. PENALTIES	41
SECTION 1206. APPEALS	41
ARTICLE XIII – PROHIBITIONS	42
SECTION 1301. PROHIBITED DISCHARGES AND CONNECTIONS	42
SECTION 1302. ROOF DRAINS	42
SECTION 1303. ALTERATION OF BMPs	42
ARTICLE XIV – FEES AND EXPENSES	43
SECTION 1401. GENERAL	43
SECTION 1402. EXPENSES COVERED BY FEES	43
SECTION 1403. RECORDING OF APPROVED SWM SITE PLAN AND RELATED AGREEMENTS	43
SECTION 1404. Municipal Stormwater Maintenance Fund	43
APPENDIX A – OPERATION AND MAINTENANCE AGREEMENT	
APPENDIX B – LOW IMPACT DEVELOPMENT PRACTICES	
APPENDIX C – STORMWATER MANAGEMENT DESIGN CRITERIA	
APPENDIX D – REVIEW FEE REIMBURSEMENT AGREEMENT	
APPENDIX E – SMALL PROJECT SWM PLAN APPLICATION	
APPENDIX F – STORMWATER MANAGEMENT DISTRICTS (RELEASE RATE MAP)	

ARTICLE I - GENERAL PROVISIONS

Section 141. Short Title

This Ordinance shall be known and may be cited as the "Robinson Township Stormwater Management Ordinance."

Section 142. Statement of Findings

The governing body of Robinson Township finds that:

- A. Inadequate management of accelerated stormwater runoff resulting from development throughout a watershed increases flood flows and velocities, contributes to erosion and sedimentation, overtaxes the carrying capacity of existing streams and storm sewers, greatly increases the cost of public facilities to convey and manage stormwater, undermines floodplain management and flood reduction efforts in upstream and downstream communities, reduces groundwater recharge, threatens public health and safety, and increases non-point source pollution of water resources.
- B. A comprehensive program of stormwater management, including reasonable regulation of development and activities causing accelerated runoff, is fundamental to the public health, safety, welfare, and the protection of the people of Robinson Township and all the people of the Commonwealth, their resources, and the environment.
- C. Inadequate planning and management of stormwater runoff resulting from land development and redevelopment throughout a watershed can also harm surface water resources by changing the natural hydrologic patterns; accelerating stream flows (which increase scour and erosion of streambeds and stream banks thereby elevating sedimentation); destroying aquatic habitat; and elevating aquatic pollutant concentrations and loadings such as sediments, nutrients, heavy metals, and pathogens. Groundwater resources are also impacted through loss of recharge.
- D. Stormwater is an important water resource which provides groundwater recharge for water supplies and base flow of streams, which also protects and maintains surface water quality.
- E. Public education on the control of pollution from stormwater is an essential component in successfully addressing stormwater issues.
- F. Federal and State regulations require certain municipalities to implement a program of stormwater controls. These municipalities are required to obtain a permit for stormwater discharges from their separate storm sewer systems under the National Pollutant Discharge Elimination System (NPDES).
- G. Non-stormwater discharges to municipal separate storm sewer systems can contribute to pollution of Waters of the Commonwealth.

Section 103. Purpose

The purpose of this Ordinance is to promote health, safety, and welfare within Robinson Township, Washington County, by minimizing the harms and maximizing the benefits described in Section 102 of this Ordinance through provisions intended to:

- A. Meet legal water quality requirements under State law, including regulations at 25 PA Code Chapter 93 to protect, maintain, reclaim, and restore the existing and designated uses of the Waters of the Commonwealth.

- B. Manage accelerated runoff and erosion and sedimentation problems close to their source, by regulating activities that cause these problems.
- C. Preserve the natural drainage systems as much as possible.
- D. Maintain groundwater recharge, to prevent degradation of surface and groundwater quality, and to otherwise protect water resources.
- E. Maintain existing flows and quality of streams and watercourses.
- F. Preserve and restore the flood-carrying capacity of streams and prevent scour and erosion of stream banks and streambeds.
- G. Manage stormwater impacts close to the runoff source, with a minimum of structures and a maximum use of natural processes.
- H. Provide procedures, performance standards, and design criteria for stormwater planning and management.
- I. Provide proper operations and maintenance of all temporary and permanent stormwater management facilities and Best Management Practices (BMPs) that are constructed and implemented.
- J. Provide standards to meet the NPDES permit requirements.

Section 104. Statutory Authority

- A. Primary Authority: Robinson Township is empowered to regulate these activities by the authority of the Act of October 4, 1978, 32 P.S., P.L. 864 (Act 167), 32 P.S. Section 680.1 et seq., as amended, the "Storm Water Management Act".
- B. Secondary Authority: Robinson Township also is empowered to regulate land use activities that affect runoff by the authority of the Act of July 31, 1968, P.L. 805, No. 247, The Pennsylvania Municipalities Planning Code, as amended.

Section 105. Applicability

This Ordinance shall apply to all areas of Robinson Township, any Regulated Activity within Robinson Township, and all stormwater runoff entering into Robinson Township's separate storm sewer system from lands within the boundaries of Robinson Township.

Earth disturbance activities and associated stormwater management controls are also regulated under existing state law and implementing regulations. This Ordinance shall operate in coordination with those parallel requirements; the requirements of this Ordinance shall be no less restrictive in meeting the purposes of this Ordinance than state law.

"Regulated Activities" are any earth disturbance activities or any activities that involve the alteration or development of land in a manner that may affect stormwater runoff. "Regulated Activities" include, but are not limited to, the following listed items:

- A. Earth Disturbance Activities
- B. Land Development
- C. Subdivision
- D. Construction of new or additional impervious or semi-pervious surfaces
- E. Construction of new buildings or additions to existing buildings
- F. Diversion or piping of any natural or man-made stream channel
- G. Installation of stormwater management facilities or appurtenances thereto

H. Installation of stormwater BMPs

See Section 302 of this Ordinance for Exemption/Modification Criteria.

Section 106. Repealer

Any ordinance, ordinance provision(s), or regulation of Robinson Township inconsistent with any of the provision(s) of this Ordinance is hereby repealed to the extent of the inconsistency only.

Section 107. Severability

In the event that a court of competent jurisdiction declares any section(s) or provision(s) of this Ordinance invalid, such decision shall not affect the validity of any of the remaining section(s) or provision(s) of this Ordinance.

Section 108. Compatibility with Other Ordinance Requirements

Approvals issued and actions taken pursuant to this Ordinance do not relieve the Applicant of the responsibility to comply with or to secure required permits or approvals for activities regulated by any other applicable codes, laws, rules, statutes, or ordinances. To the extent that this Ordinance imposes more rigorous or stringent requirements for stormwater management, the specific requirements contained in this Ordinance shall be followed.

Section 109. Duty of Persons Engaged in the Development of Land

Notwithstanding any provision(s) of this Ordinance, including exemptions, any landowner or any person engaged in the alteration or development of land which may affect stormwater runoff characteristics shall implement such measures as are reasonably necessary to prevent injury to health, safety, or other property. Such measures also shall include actions as are required to manage the rate, volume, direction, and quality of resulting stormwater runoff in a manner which otherwise adequately protects health, property, and water quality.

Section 110. Municipal Liability Disclaimer

- A. Neither the granting of any approval under this Ordinance, nor the compliance with the provisions of this Ordinance, or with any condition imposed by the Township, its officials, employees or designated representatives hereunder, shall relieve any person from any responsibility for damage to persons or property resulting there from, or as otherwise imposed by law nor impose any liability upon the Township, its officials, employees or designated representatives for damages to persons or property to the maximum extent permitted by law.
- B. The granting of a permit which includes any storm water management facilities shall not constitute a representation, guarantee or warranty of any kind by the Township, or by an official or employee or designated representative thereof, of the practicability or safety of any structure or facility, use or other plan proposed, and shall create no liability upon or cause of action against the Township, official or employee or designated representative for any damage that may result pursuant thereto to the maximum extent permitted by law.
- C. This Ordinance does not imply that areas subject to the stormwater management requirements of this Ordinance will be free from flooding or flood damage.

ARTICLE II - DEFINITIONS

For the purpose of this Ordinance, certain terms and words used herein shall be interpreted as follows:

- A. Words used in the present tense include the future tense; the singular number includes the plural; and the plural number includes the singular; words of masculine gender include feminine gender; and words of feminine gender include masculine gender.
- B. The word "includes" or "including" shall not limit the term to the specific example but is intended to extend its meaning to all other instances of like kind and character.
- C. The word "person" includes an individual, firm, association, organization, partnership, trust, company, corporation, or any other similar entity.
- D. The words "shall" and "must" are mandatory; the words "may" and "should" are permissive.
- E. The words "used or occupied" include the words "intended, designed, maintained, or arranged to be used, occupied or maintained".

Accelerated Erosion - The removal of the surface of the land through the combined action of human activity and natural processes at a rate greater than would occur because of the natural process alone.

Agricultural Activities - Activities associated with agriculture such as agricultural cultivation, agricultural operation, and animal heavy use areas. This includes the work of producing crops, tillage, land clearing, plowing, disking, harrowing, planting, harvesting crops, or pasturing and raising of livestock and installation of conservation measures. Construction of new buildings or impervious area is not considered an Agricultural Activity.

Alteration - As applied to land, a change in topography as a result of the moving of soil and rock from one location or position to another; changing of surface conditions by causing the surface to be more or less impervious; land disturbance.

Applicant - A landowner, developer, or other person who has filed an application for approval to engage in any Regulated Activities at a project site within the municipality.

Best Management Practices (BMPs) - Activities, facilities, designs, measures or procedures used to manage stormwater impacts from Regulated Activities, to meet State Water Quality Requirements, to promote groundwater recharge and to otherwise meet the purposes of this Ordinance. Stormwater BMPs are commonly grouped into one of two broad categories or measures: "non-structural" or "structural". "Non-structural" BMPs are measures referred to as operational and/or behavior-related practices that attempt to minimize the contact of pollutants with stormwater runoff whereas "structural" BMPs are measures that consist of a physical device or practice that is installed to capture and treat stormwater runoff. "Structural" BMPs include, but are not limited to, a wide variety of practices and devices, from large-scale retention ponds and constructed wetlands, to small-scale underground treatment systems, infiltration facilities, filter strips, low impact design, bioretention, wet ponds, permeable paving, grassed swales, riparian or forested buffers, sand filters, detention basins, and manufactured devices. "Structural" stormwater BMPs are permanent appurtenances to the project site.

Channel Erosion - The widening, deepening, and headward cutting of small channels and waterways, due to erosion caused by moderate to large floods.

Cistern - An underground reservoir or tank used for storing rainwater.

Conservation District - The Washington County Conservation District. The Washington County Conservation District has the authority under a delegation agreement executed with the Department

of Environmental Protection to administer and enforce all or a portion of the regulations promulgated under 25 PA Code Chapter 102.

Culvert - A structure with appurtenant works that carries a stream and/or stormwater runoff under or through an embankment or fill.

Dam - An artificial barrier, together with its appurtenant works, constructed for the purpose of impounding or storing water or another fluid or semifluid, or a refuse bank, fill or structure for highway, railroad or other purposes which does or may impound water or another fluid or semifluid.

Design Storm - The magnitude and temporal distribution of precipitation from a storm event measured in probability of occurrence (e.g., a 25-year storm) and duration (e.g., 24-hours), used in the design and evaluation of stormwater management systems. Also see Return Period.

Designee (Designated Representative) - The agent of this municipality and/or agent of the governing body involved with the administration, review or enforcement of any provisions of this Ordinance by contract or memorandum of understanding.

Detention Basin - An impoundment structure designed to manage stormwater runoff by temporarily storing the runoff and releasing it at a predetermined rate.

Detention Volume - The volume of runoff that is captured and released into Waters of the Commonwealth at a controlled rate.

Developer and/or Subdivider - A person, partnership, association, corporation, or other entity, or any responsible person therein or agent thereof, that undertakes any Regulated Activity of this Ordinance.

Development Site - (Site) - The specific tract of land for which a Regulated Activity is proposed. Also see Project Site.

Disturbed Area - An unstabilized land area where an Earth Disturbance Activity is occurring or has occurred.

Downslope Property Line - That portion of the property line of the lot, tract, or parcels of land being developed located such that all overland or pipe flow from the site would be directed toward it.

Drainage Conveyance Facility - A stormwater management facility designed to convey stormwater runoff and shall include streams, channels, swales, pipes, conduits, culverts, storm sewers, etc.

Drainage Easement - A right granted by a landowner to a grantee, allowing the use of private land for stormwater management, drainage, or conveyance purposes.

Drainage Plan - The documentation of the stormwater management system, if any, to be used for a given development site, the contents of which are established in this Ordinance; Stormwater Management Plan and Report Package.

Drainageway - Any natural or artificial watercourse, trench, ditch, pipe, swale, channel, or similar depression into which surface water flows.

Earth Disturbance Activity - A construction or other human activity which disturbs the surface of the land, including, but not limited to, clearing and grubbing, grading, excavations, embankments, land development, agricultural plowing or tilling, timber harvesting activities, road maintenance activities, mineral extraction, and the moving, depositing, stockpiling, or storing of soil, rock or earth materials.

Engineer - A person, partnership or corporation which shall have a license issued by the Commonwealth of Pennsylvania as a "Professional Engineer" and which shall prepare all stormwater management plans and reports required under this Ordinance, and which shall seal with the professional seal all plans and documents submitted under this Ordinance.

Erosion - The movement of soil particles by the action of water, wind, ice, or other natural forces.

Erosion and Sediment Pollution Control Plan - A plan which is designed to minimize accelerated erosion and sedimentation.

Exceptional Value Waters - Surface waters of high quality, which satisfies PA Code Title 25 Environmental Protection, Chapter 93 Water Quality Standards 93.4b(b) (relating to anti-degradation).

Existing Conditions - The initial condition of a project site prior to the proposed construction. If the initial condition of the site is undeveloped land and not forested, the land use shall be considered as "meadow" unless the natural land cover is documented to generate lower Curve Numbers or Rational "C" Coefficient.

FEMA - The Federal Emergency Management Agency.

Flood - A general but temporary condition of partial or complete inundation of normally dry land areas from the overflow of streams, rivers, and other Waters of the Commonwealth.

Flood Fringe - The remaining portions of the 100-year floodplain outside of the floodway boundary.

Floodplain - Any land area susceptible to inundation by water from any natural source or delineated by applicable Department of Housing and Urban Development, Federal Insurance Administration. Flood Hazard Boundary - mapped as being a special flood hazard area. Included are lands adjoining a river or stream that have been or may be inundated by a 100-year flood. Also included are areas that comprise Group 13 Soils, as listed in Appendix A of the Pennsylvania Department of Environmental Protection (PADEP) Technical Manual for Sewage Enforcement Officers (as amended or replaced from time to time by PADEP).

Floodway - The channel of the watercourse and those portions of the adjoining floodplains that are reasonably required to carry and discharge the 100-year frequency flood. Unless otherwise specified, the boundary of the floodway is as indicated on maps and flood insurance studies provided by FEMA. In an area where no FEMA maps or studies have defined the boundary of the 100-year frequency floodway, it is assumed - absent evidence to the contrary - that the floodway extends from the stream to 50 feet landward from the top of the bank of the stream.

Forest Management/Timber Operations - Planning and activities necessary for the management of forestland. These include timber inventory and preparation of forest management plans, silvicultural treatment, cutting budgets, logging road design and construction, timber harvesting, site preparation and reforestation.

Freeboard - A vertical distance between the elevation of the design high water and the top of a dam, levee, tank, basin, or diversion ridge. The space is required as a safety margin in a pond or basin.

Grade - A slope, usually of a road, channel or natural ground specified in percent and shown on plans as specified herein.

(To) Grade - To finish the surface of a roadbed, top of embankment or bottom of excavation.

Groundwater Recharge - Replenishment of existing natural underground water supplies.

HEC-HMS Model Calibrated - (Hydrologic Engineering Center Hydrologic Modeling System) A computer-based hydrologic modeling technique adapted to the watershed(s) in Washington County for the Act 167 Plan. The model has been calibrated by adjusting key model input parameters.

High Quality Waters - Surface water having quality, which exceeds levels necessary to support propagation of fish, shellfish, and wildlife and recreation in and on the water by satisfying PA Code Title 25 Environmental Protection, Chapter 93 Water Quality Standards 93.4b(a).

Hydrologic Soil Group (HSG) - Infiltration rates of soils vary widely and are affected by subsurface permeability as well as surface intake rates. Soils are classified into one of four HSG (A, B, C, and D) according to their minimum infiltration rate, which is obtained for bare soil after prolonged wetting. The Natural Resource Conservation Service (NRCS) of the US Department of Agriculture defines the four groups and provides a list of most of the soils in the United States and their group classification. The soils in the area of interest may be identified from a soil survey report from the local NRCS office or the County Conservation District.

Impaired Waterway - Surface water segment found not attaining any one of the defined uses and is included on the Stream Integrated List represents stream assessments in an integrated format for the Clean Water Act Section 303(d) listing.

Impervious Surface (Impervious Area) - A surface that prevents the infiltration of water into the ground. Impervious surface (or areas) include, but is not limited to: roofs, additional indoor living spaces, patios, garages, storage sheds and similar structures, parking or driveway areas, and any new streets and sidewalks. Any surface areas proposed to initially be gravel or crushed stone shall be assumed to be impervious surfaces.

Impoundment - A retention or detention basin designed to retain stormwater runoff and release it at a controlled rate.

Improvements - Those physical additions and changes to the land that may be necessary to produce usable and desirable lots.

Infiltration Structures - A structure designed to direct runoff into the ground (e.g., french drains, seepage pits, seepage trench, etc.).

Inlet - A surface connection to a closed drain. A structure at the diversion end of a conduit. The upstream end of any structure through which water may flow.

Karst - A type of topography or landscape characterized by surface depressions, sinkholes, rock pinnacles/uneven bedrock surface, steep-sided hills, underground drainage and caves. Karst is formed on carbonate rocks, such as limestone or dolomites and sometimes gypsum.

Land Development (Development) - (i) The improvement of one lot or two or more contiguous lots, tracts or parcels of land for any purpose involving (a) a group of two or more buildings, or (b) the division or allocation of land or space between or among two or more existing or prospective occupants by means of, or for the purpose of streets, common areas, leaseholds, condominiums, building groups, or other features; (ii) Any subdivision of land; (iii) Development in accordance with Section 503(1.1) of the PA Municipalities Planning Code.

Land Disturbance - Any activity involving grading, tilling, digging, or filling of ground or stripping of vegetation or any other activity that causes an alteration to the natural condition of the land.

Lot - A designated parcel, tract or area of land established by a plan or otherwise as permitted by law and to be used, developed or built upon as a unit.

Low Impact Development (LID) - an approach to land development that uses various land planning and design practices and technologies to simultaneously conserve and protect natural resource systems and reduce infrastructure costs. LID still allows land to be developed, but in a cost-effective manner that helps mitigate potential environmental impacts.

Main Stem (Main Channel) - Any stream segment or other runoff conveyance facility used as a reach in the Washington County Act 167 watershed hydrologic model(s).

Manning Equation (Manning Formula) - A method for calculation of velocity of flow (e.g., feet per second) and flow rate (e.g., cubic feet per second) in open channels based upon channel shape, roughness, depth of flow and slope. "Open channels" may include closed conduits so long as the flow is not under pressure.

Municipality - Robinson Township, Washington County, Pennsylvania.

National Pollutant Discharge Elimination System (NPDES) - The federal government's system for issuance of permits under the Clean Water Act, which is delegated to PADEP in Pennsylvania.

NOAA Atlas 14: - Precipitation-Frequency Atlas of the United States, Atlas 14, Volume 2, US Department of Commerce, National Oceanic and Atmospheric Administration, National Weather Service, Hydrometeorological Design Studies Center, Silver Spring, Maryland (2004), or latest revision. NOAA's Atlas 14 can be accessed at Internet address: <http://hdsc.nws.noaa.gov/hdsc/pfds/>

Non-point Source Pollution - Pollution that enters a water body from diffuse origins in the watershed and does not result from discernible, confined, or discrete conveyances.

NRCS - Natural Resource Conservation Service (previously Soil Conservation Service (SCS)).

Open Channel - A drainage element in which stormwater flows with an open surface. Open channels include, but shall not be limited to, natural and man-made drainageways, swales, streams, ditches, canals, and pipes not under pressure.

Outfall - (i) Point where water flows from a conduit, stream, or drain; (ii) "Point Source" as described in 40 CFR § 122.2 at the point where the Township's storm sewer system discharges to surface Waters of the Commonwealth.

Outlet - Points of water disposal from a stream, river, lake, tidewater, or artificial drain.

PADEP - The Pennsylvania Department of Environmental Protection.

Parking Lot Storage - Involves the use of impervious parking areas as temporary impoundments with controlled release rates during rainstorms.

Peak Discharge - The maximum rate of stormwater runoff from a specific storm event.

Performance Guarantee - Any security which may be accepted in lieu of a requirement that certain improvements be made before the Township gives final approval of a Plan, including performance bonds, escrow agreements, letters of credit, and any other collateral or surety agreements.

Person - An individual, partnership, public or private association or corporation, or a governmental unit, public utility or any other legal entity whatsoever which is recognized by law as the subject of rights and duties.

Pervious Area - Any area not defined as impervious.

Pipe - A culvert, closed conduit, or similar structure (including appurtenances) that conveys stormwater.

Plan, Preliminary - A tentative subdivision or land development plan (including all required supplementary data), in lesser detail than a final plan, showing, among other things, topographical data and approximate proposed street and lot layout as a basis for consideration of a major subdivision prior to preparation of a final plan, all as more fully set forth in the Subdivision and Land Development Ordinance.

Plan, Final - A complete and exact subdivision or land development plan (including all required supplementary data), prepared for official recording of a major subdivision, to define property rights and proposed street and other improvements, prepared by a Registered Surveyor, all as more fully set forth in the Subdivision and Land Development Ordinance of the Township.

Planning Commission - The Planning Commission of Robinson Township.

Point Source - Any discernible, confined, or discrete conveyance, including, but not limited to: any pipe, ditch, channel, tunnel, or conduit from which stormwater is or may be discharged, as defined in State regulations at 25 Pennsylvania Code § 92.1.

Probable Maximum Flood (PMF) - The flood that may be expected from the most severe combination of critical meteorological and hydrologic conditions that are reasonably possible in any area. The PMF is derived from the probable maximum precipitation (PMP) as determined on the basis of data obtained from the National Oceanographic and Atmospheric Administration (NOAA).

Project Site - The specific area of land where any Regulated Activities in the Township are planned, conducted, or maintained.

Qualified Professional - Any person licensed by the Pennsylvania Department of State or otherwise qualified by law to perform the work required by the Ordinance.

Rational Formula - A rainfall-runoff relation used to estimate peak flow.

Redevelopment - Earth disturbance activities on land, which has previously been developed.

Regulated Activities - Any earth disturbance activities or any activities that involve the alteration or development of land in a manner that may affect stormwater runoff.

Regulated Earth Disturbance Activity - Activity involving Earth Disturbance subject to regulation under 25 PA Code Chapter 92, Chapter 102, or the Clean Streams Law.

Release Rate - The percentage of pre-development peak rate of runoff from a site or subwatershed area to which the post-development peak rate of runoff must be reduced to protect downstream areas.

Release Rate District - Those subwatershed areas in which post-development flows must be reduced to a certain percentage of pre-development flows as required to meet the plan requirements and the goals of Act 167.

Retention Basin - An impoundment in which stormwater is stored and not released during the storm event. Stored water may be released from the basin at some time after the end of the storm.

Retention Volume/Removed Runoff - The volume of runoff that is captured and not released directly into the surface Waters of this Commonwealth during or after a storm event.

Return Period - The average interval, in years, within which a storm event of a given magnitude can be expected to recur. For example, the 25-year return period rainfall would be expected to recur on the average once every twenty-five years; or stated in another way, the probability of a 25-year storm occurring in any one given year is 0.04 (i.e. a 4% chance).

Riparian Buffer - A vegetated area bordering perennial and intermittent streams and wetlands, that serves as a protective filter to help protect streams and wetlands from the impacts of adjacent land uses.

Riser - A vertical pipe extending from the bottom of a pond that is used to control the discharge rate from the pond for a specified design storm.

Road Maintenance - Earth disturbance activities within the existing road right-of-way, such as grading and repairing existing unpaved road surfaces, cutting road banks, cleaning or clearing drainage ditches, and other similar activities. Road maintenance activities that do not disturb the subbase of a paved road (such as milling and overlays) are not considered earth disturbance activities.

Rooftop Detention - Temporary ponding and gradual release of stormwater falling directly onto flat roof surfaces by incorporating controlled-flow roof drains into building designs.

Runoff - Any part of precipitation that flows over the land surface.

Runoff Capture Volume - The volume of runoff that is captured (retained) and not released into surface Waters of the Commonwealth during or after a storm event.

SCS - U.S. Department of Natural Resources, Soil Conservation Service (now USDNR).

Sediment - Soils or other materials transported by surface water as a product of erosion.

Sediment Basin - A barrier, dam, retention or detention basin located and designed to retain rock, sand, gravel, silt, or other material transported by stormwater runoff.

Sediment Pollution - The placement, discharge, or any other introduction of sediment into Waters of the Commonwealth occurring from the failure to properly design, construct, implement or maintain control measures and control facilities in accordance with the requirements of this Ordinance.

Sedimentation - The process by which mineral or organic matter is accumulated or deposited by the movement of water.

Seepage Pit/Seepage Trench - An area of excavated earth filled with loose stone or similar coarse material, into which surface water is directed for infiltration into the ground.

Separate Storm Sewer System - A conveyance or system of conveyances (including roads with drainage systems, Municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains) primarily used for collecting and conveying stormwater runoff.

Sheet Flow - Runoff that flows over the ground surface as a thin, even layer, not concentrated in a channel.

Soil Cover Complex Method - A method of runoff computation developed by the Natural Resources Conservation Service (NRCS) that is based on relating soil type and land use/cover to a runoff parameter called Curve Number (CN).

Spillway (Emergency) - A depression in the embankment of a pond or basin, or other overflow structure, that is used to pass peak discharges greater than the maximum design storm controlled by the pond or basin.

State Water Quality Requirements - The regulatory requirements to protect, maintain, reclaim, and restore water quality under Title 25 of that Pennsylvania Code and the Clean Streams Law.

Storage Indication Method - A reservoir routing procedure based on solution of the continuity equation (inflow minus outflow equals the change in storage) with outflow defined as a function of storage volume and depth.

Storm Frequency - The number of times that a given storm "event" occurs or is exceeded on the average in a stated period of years. See also Return Period.

Storm Sewer - A system of pipes and/or open channels that convey intercepted runoff and stormwater from other sources, but excludes domestic sewage and industrial wastes.

Stormwater - Drainage runoff from the surface of the land resulting from precipitation, snow, or ice melt.

Stormwater Hotspot - A land use or activity that generates higher concentrations of hydrocarbons, trace metals, or toxicants than are found in typical stormwater runoff.

Stormwater Management Facilities - Any structure, natural or man-made, that, due to its condition, design, or construction, conveys, stores, or otherwise affects stormwater runoff. Typical stormwater management facilities include, but are not limited to: detention and retention basins, open channels, storm sewers, pipes and infiltration facilities.

Stormwater Management Plan - The Washington County Stormwater Management Plan for managing stormwater runoff in Washington County as required by the Act of October 4, 1978, P.L. 864, (Act 167) and known as the "Storm Water Management Act".

Stormwater Management Site Plan (SWM Site Plan) - The plan prepared by the Applicant or his representative indicating how stormwater runoff will be managed at the project site in accordance with this Ordinance.

Stream Enclosure - A bridge, culvert, or other structure in excess of 100 feet in length upstream to downstream which encloses a regulated Waters of the Commonwealth.

Subwatershed Area - The smallest drainage unit of a watershed for which stormwater management criteria has been established in the Stormwater Management Plan.

Subdivision - The division or re-division of a lot, tract, or parcel of land by any means, into two or more lots, tracts, parcels or other divisions of land including changes in existing lot lines for the purpose, whether immediate or future, of lease, transfer of ownership, or building or lot development, provided; however, that the subdivision by lease of land for agricultural purposes into parcels of more than ten

acres, not involving any new street or easement of access or any residential dwellings, shall be exempt (Pennsylvania Municipalities Planning Code, Act of July 31, 1968, P.L. 805, No. 247).

Swale - A low-lying stretch of land that gathers or carries surface water runoff.

Timber Operations - See "Forest Management".

Time of Concentration (T_c) - The time for surface runoff to travel from the hydraulically most distant point of the watershed to a point of interest within the watershed. This time is the combined total of overland flow time and flow time in pipes or channels, if any.

Township - Robinson Township, Washington County.

USDA - The United States Department of Agriculture.

Waiver - Intentional relinquishing of a specific right, claim or privilege by the governing body.

Watercourse - A channel or conveyance of surface water, such as a stream or creek, having defined bed and banks, whether natural or artificial, with perennial or intermittent flow.

Waters of the Commonwealth - Rivers, streams, creeks, rivulets, impoundments, ditches, watercourses, storm sewers, lakes, dammed water, wetlands, ponds, springs and other bodies or channels of conveyance of surface and underground water, or parts thereof, whether natural or artificial, within or on the boundaries of the Commonwealth of Pennsylvania.

Watershed - Region or area drained by a river, watercourse, or other surface water, whether natural or artificial.

Wetland - Those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions, including swamps, marshes, bogs and similar areas. (The term includes but is not limited to wetland areas listed in the State Water Plan, the United States Forest Service Wetlands Inventory of Pennsylvania, the Pennsylvania Coastal Zone Management Plan and a wetland area designated by a river basin commission. This definition is used by the United States Environmental Protection Agency and the United States Army Corps of Engineers.)

Acronyms:

BMPS	-	Best Management Practices
CN	-	Curve Number
E&S	-	Erosion and Sedimentation
EV	-	Exceptional Value
FEMA	-	Federal Emergency Management Agency
HEC-HMS	-	Hydrologic Engineering Center Hydrologic Modeling System)
HQ	-	High Quality
HSG	-	Hydrologic Soil Group
LID	-	Low Impact Development
MPC	-	Pennsylvania Municipalities Planning Code, Act of July 31, 1968, P.L. 805, No. 247
MS4	-	Municipal Separate Storm Sewer System
NPDES	-	National Pollutant Discharge Elimination System
NOAA	-	US Department of Commerce, National Oceanic and Atmospheric Administration
NRCS	-	Natural Resource Conservation Service
O&M	-	Operation and Maintenance
PADEP	-	The Pennsylvania Department of Environmental Protection
PENNDOT	-	Pennsylvania Department of Transportation
PMF	-	Probable Maximum Flood
SWM	-	Stormwater Management
T _c	-	Time of Concentration
USDA	-	United States Department of Agriculture

ARTICLE III - STORMWATER MANAGEMENT STANDARDS

Section 301. General Requirements

- A. For all Regulated Activities, unless specifically exempted in Section 302:
1. Preparation and implementation of an approved SWM Site Plan is required.
 2. No Regulated Activities shall commence until the Township issues written approval of a SWM Site Plan, which demonstrates compliance with the requirements of this Ordinance.
 3. The SWM Site Plan shall demonstrate that adequate capacity will be provided to meet the Volume and Rate Control Requirements, as described under Sections 304 and 305 of this Ordinance.
 4. The SWM Site Plan approved by the Township, shall be on-site throughout the duration of the Regulated Activities.
- B. For all Regulated Earth Disturbance Activities, erosion and sediment control BMPs shall be designed, implemented, operated, and maintained during the Regulated Earth Disturbance Activities (e.g., during construction) to meet the purposes and requirements of this Ordinance and to meet all requirements under Title 25 of the Pennsylvania Code (including, but not limited to Chapter 102 Erosion and Sediment Control) and the Clean Streams Law. Various BMPs and their design standards are listed in the *Erosion and Sediment Pollution Control Program Manual (E&S Manual)*, No. 363-2134-008 (April 15, 2000), as amended and updated.
- C. For all Regulated Activities, stormwater BMPs shall be designed, installed, implemented, operated, and maintained to meet the purposes and requirements of this Ordinance and to meet all requirements under Title 25 of the Pennsylvania Code and the Clean Streams Law, conform to the State Water Quality Requirements, meet all requirements under the Storm Water Management Act and any more stringent requirements as determined by the Township.
- D. The Township may, after consultation with PADEP, approve measures for meeting the State Water Quality Requirements other than those in this Ordinance, provided that they meet the minimum requirements of, and do not conflict with state law, including, but not limited to, the Clean Streams Law.
- E. All Regulated Activities shall include, to the maximum extent practicable, measures to:
1. Protect health, safety, and property.
 2. Meet the water quality goals of this Ordinance by implementing measures to:
 - a. Minimize disturbance to floodplains, wetlands, natural slopes, existing native vegetation and woodlands.
 - b. Create, maintain, or extend riparian buffers and protect existing forested buffers.
 - c. Provide trees and woodlands adjacent to impervious areas whenever feasible.
 - d. Minimize the creation of impervious surfaces and the degradation of Waters of the Commonwealth and promote groundwater recharge.
 - e. Protect natural systems and processes (drainageways, vegetation, soils, and sensitive areas) and maintain, as much as possible, the natural hydrologic regime.
 - f. Incorporate natural site elements (wetlands, stream corridors, mature forests) as design elements.
 - g. Avoid erosive flow conditions in natural flow pathways.
 - h. Minimize soil disturbance and soil compaction.

- i. Minimize thermal impacts to Waters of the Commonwealth.
- j. Disconnect impervious surfaces by directing runoff to pervious areas, wherever possible and decentralize and manage stormwater at its source.

F. Impervious Areas:

- 1. The measurement of impervious areas shall include all of the impervious areas in the total proposed development, even if development is to take place in stages.
- 2. For developments taking place in stages, the entire development plan must be used in determining conformance with this Ordinance.
- 3. Projects that add impervious area to a developed parcel, the total impervious area on the parcel is subject to the requirements of this Ordinance.

G. If diffused flow is proposed to be concentrated and discharged onto adjacent property, the Applicant must document that adequate downstream conveyance facilities exist to safely transport the concentrated discharge, or otherwise prove that no erosion, sedimentation, flooding, or other harm will result from the concentrated discharge.

- 1. Applicant must provide written permission for proposed concentrated flow across adjacent properties if no existing drainage channel or watercourse exists.
- 2. Such stormwater flows shall be subject to the requirements of this ordinance.

H. Stormwater drainage systems shall be provided in order to permit unimpeded flow along natural watercourses, except as modified by stormwater management facilities or open channels consistent with this Ordinance.

I. Where watercourses traverse a development site, drainage easements (encompassing the 100-year elevation with a minimum width of 20 feet) shall be provided conforming to the line of such watercourses. The terms of the easement shall prohibit excavation, the placing of fill or structures, and any alterations that may adversely affect the flow of stormwater within any portion of the easement. Also, maintenance, including mowing of vegetation within the easement may be required, except as approved by the appropriate governing authority.

J. When it can be shown that, due to topographic conditions, natural drainageways on the site cannot adequately provide for drainage, open channels may be constructed conforming substantially to the line and grade of such natural drainageways. Work within natural drainage ways shall be subject to approval by PADEP under regulations at 25 PA Code Chapter 105 through the Joint Permit Application process, or, where deemed appropriate by PADEP, through the General Permit process.

K. Any stormwater management facilities or any facilities that constitute water obstructions (e.g., culverts, bridges, outfalls, or stream enclosures, etc.) that are regulated by this Ordinance, that will be located in or adjacent to Waters of the Commonwealth (including wetlands), shall be subject to approval by PADEP under regulations at 25 PA Code Chapter 105 through the Joint Permit Application process, or, where deemed appropriate by PADEP, the General Permit process. When there is a question whether wetlands may be involved, it is the responsibility of the Applicant or his agent to show that the land in question cannot be classified as wetlands; otherwise, approval to work in the area must be obtained from PADEP.

L. Should any stormwater management facility require a dam safety permit under PADEP Chapter 105, the facility shall be designed in accordance with Chapter 105 and meet the regulations of Chapter 105 concerning dam safety.

M. Any stormwater management facilities regulated by this Ordinance that will be located on, or discharged onto State highway rights-of-ways shall be subject to approval by the Pennsylvania Department of Transportation (PENNDOT).

- N. Minimization of impervious surfaces and infiltration of runoff through seepage beds, infiltration trenches, etc., are encouraged, where soil conditions and geology permit, to reduce the size or eliminate the need for detention facilities.
- O. Infiltration BMPs should be dispersed throughout the site, made as shallow as practicable, and located to maximize use of natural on-site infiltration features while still meeting the other requirements of this Ordinance.
- P. Roof drains shall not be connected to streets, sanitary or storm sewers, or roadside ditches in order to promote overland flow and infiltration/percolation of stormwater where it is advantageous to do so. When it is more advantageous to connect directly to streets or storm sewers, then the Township shall permit it on a case-by-case basis.
- Q. Applicants are encouraged to use Low Impact Development Practices to comply with the requirements of this Ordinance and the State Water Quality Requirements.
- R. When stormwater management facilities are proposed within 1,000 feet of a downstream Municipality, the Developer shall notify the downstream municipality and supply a copy of the SWM Plan, if requested, for review and comment.

Section 302. Exemptions/Modifications

- A. Under no circumstance shall the Applicant be exempt from implementing such measures as necessary to:
 - 1. Meet State Water Quality Standards and Requirements under Title 25 of that Pennsylvania Code and the Clean Streams Law.
 - 2. Protect health, safety, and property.
 - 3. Meet special requirements for High Quality (HQ) and Exceptional Value (EV) watersheds.
- B. The Applicant must utilize the following BMPs to the maximum extent practicable to receive consideration for the exemptions:
 - 1. Design around and limit disturbance of Floodplains, Wetlands, Natural Slopes over 15%, existing native vegetation, and other sensitive and special value features.
 - 2. Maintain riparian and forested buffers.
 - 3. Limit grading and maintain non-erosive flow conditions in natural flow paths.
 - 4. Maintain existing tree canopies near impervious areas.
 - 5. Minimize soil disturbance and reclaim disturbed areas with topsoil and vegetation.
 - 6. Direct runoff to pervious areas.
- C. The Applicant's proposed development/additional impervious area may not adversely impact the following:
 - 1. Capacities of existing drainageways and storm sewer systems.
 - 2. Velocities and erosion.
 - 3. Quality of runoff if direct discharge is proposed.
 - 4. Existing known problem areas.
 - 5. Safe conveyance of the additional runoff.
 - 6. Downstream property owners.

D. Single Family Residential activities are exempt from these requirements provided the construction:

1. Comply with Sections 301.G, 302.A, 302.B, 302.C, and
2. Have building setback 75 feet from downstream property lines, and
3. Driveways:
 - a. Runoff must discharge onto pervious surface with a gravel strip or other spreading device.
 - b. No more than 1,000 square feet of paved surface may discharge to any one point.
 - c. The length of flow on the pervious must exceed the length of the paved surface flow.
4. The Township can require more information or require mitigation of certain impacts through installation of stormwater management BMP's if there is a threat to property, health, or safety.

E. An Applicant proposing Regulated Activities, after demonstrating compliance with Sections 302.A, 302.B, and 302.C, may be exempted from various requirements of this Ordinance according to the following table:

New Impervious Area ¹ (Square Footage)	Applicant must provide
0 – 2,500	No submission
2,500 – 5,000	Documentation of impervious surfaces (Small Project SWM Application) ³
> 5,000	Rate Controls, Volume Controls & SWM Site Plan

NOTES:

¹ New Impervious Area since the date of Adoption of this Ordinance.

² Gravel in existing condition shall be considered pervious and gravel in proposed condition shall be considered impervious.

³ The first page of the Small Project Stormwater Management Application included in Appendix E may be used to document new impervious surfaces.

F. An Applicant proposing Regulated Activities, after demonstrating compliance with Sections 302.A, 302.B, and 302.C, may be exempted from various requirements of this Ordinance if documentation can be provided that a downstream man-made water body (i.e., reservoir, lake, or man-made wetlands) has been designed or modified to address the potential stormwater flooding impacts of the proposed development.

1. The Volume Control requirements specified in Section 304 may be considered satisfied for a Regulated Activity if facilities associated with the activity were already planned, approved and permitted as part of another project such as a subdivision.
2. The Rate Control requirements specified in Section 305 may be considered satisfied for a Regulated Activity if facilities associated with the activity were already planned, approved and permitted as part of another project such as a subdivision.

G. The purpose this section is to ensure consistency of stormwater management planning between local ordinances and NPDES permitting (when required) and to ensure that the Applicant has a single and clear set of stormwater management standards to which the Applicant is subject. The Township may accept alternative stormwater management controls under this section provided that:

1. The Township, in consultation with the PADEP, determines that meeting the Volume Control requirements (See Section 304) is not possible or places an undue hardship on the Applicant.
 2. The alternative controls are documented to be acceptable to PADEP, for NPDES requirements pertaining to post construction stormwater management requirements.
 3. The alternative controls are in compliance with all other sections of this ordinance, including but not limited to Sections 301.D and 302.A-C.
- H. Agricultural activity is exempt from the rate control and SWM Site Plan preparation requirements of this Ordinance provided the activities are performed according to the requirements of 25 PA Code Chapter 102.
- I. Forest management and timber operations are exempt from the Rate and Volume Control requirement and SWM Site Plan preparation requirement of this Ordinance provided the activities are performed according to the requirements of 25 PA Code Chapter 102. It should be noted that temporary roadways are not exempt.
1. All temporary and permanent haul roads that are not to receive an asphalt wearing course shall be designed and constructed consistent with recommendations of the Center for Dirt and Gravel Road Studies and the PA State Conservation Commission's *Dirt and Gravel Road Maintenance Program*.

Section 303. Waivers

- A. The provisions of this Ordinance are the minimum standards for the protection of the public welfare.
- B. All waiver requests must meet the provisions of Section 303.G. and H. Waivers shall not be issued from implementing such measures as necessary to:
 1. Meet State Water Quality Standards and Requirements.
 2. Protect health, safety, and property.
 3. Meet special requirements for High Quality (HQ) and Exceptional Value (EV) watersheds as defined by PA Title 25, Chapter 93, Water Quality Standards.

The Township will then consider waivers in accordance with Section 301.D, which states that the Township may, after consultation with PADEP, approve measures for meeting the State Water Quality Requirements other than those in this Ordinance, provided that they meet the minimum requirements of, and do not conflict with state law, including, but not limited to, the Clean Streams Law.

- C. If an Applicant demonstrates to the satisfaction of the governing body of the Township that any mandatory provision of this Ordinance is unreasonable or causes unique or undue unreasonableness or hardship as it applies to the proposed Project, or that an alternate design may result in a superior result within the context of Section 102 and 103 of this Ordinance, the governing body of the Municipality upon obtaining the comments and recommendations of the Township Engineer may grant a waiver or relief so that substantial justice may be done and the public interest is secured; provided that such waiver will not have the effect of nullifying the intent and purpose of this Ordinance.
- D. The Applicant shall submit all requests for waivers in writing and shall include such requests as a part of the plan review and approval process. The Applicant shall state in full the facts of unreasonableness or hardship on which the request is based, the provision or provisions of the Ordinance that are involved, and the minimum waiver or relief that is necessary. The Applicant shall state how the requested waiver and how the Applicant's proposal shall result in

an equal or better means of complying with the intent or Purpose and general principles of this Ordinance:

- E. The Township shall keep a written record of all actions on waiver requests.
- F. The Township may charge a fee for each waiver request, which shall be used to offset the administrative costs of reviewing the waiver request. The Applicant shall also agree to reimburse the Township for reasonable and necessary fees that may be incurred by the Township Engineer in any review of a waiver request.
- G. In granting waivers, the Township may impose reasonable conditions that will, in its judgment, secure substantially the objectives of the standards or requirements that are to be modified.
- H. The Township may grant applications for waivers when the following findings are made, as relevant:
 - 1. That the waiver shall result in an equal or better means of complying with the intent of this Ordinance.
 - a. The waiver is the minimum necessary to provide relief.
 - b. The applicant is not requesting a waiver based on cost considerations.
 - c. Existing down gradient stormwater problems will not be exacerbated.
 - d. Runoff is not being diverted to a different drainage area.
 - e. Increased flooding or ponding on off-site properties or roadways will not occur.
 - f. Potential icing conditions will not occur.
 - g. Increase of peak flow or volume from the site will not occur.
 - h. Erosive conditions due to increased peak flows or volume will not occur.
 - i. Adverse impact to water quality will not result.
 - j. Increased 100-Year Floodplain levels will not result.
 - k. Infiltration of runoff throughout the proposed site has been provided where practicable and pre-development ground water recharge protected.
 - l. Peak flow attenuation of runoff has been provided.
 - m. Long term operation and maintenance activities are established.
 - n. The receiving streams and/or water bodies will not be adversely impacted in flood carrying capacity, aquatic habitat, channel stability and erosion and sedimentation.

Section 344. Volume Controls

- A. The Low Impact Development Practices provided in the BMP Manual and in Appendix B of this Ordinance shall be utilized for all Regulated Activities to the maximum extent practicable.
- B. The Small Project Stormwater Management Application included in Appendix E may be used for projects under 5,000 sf of new impervious surface and single family home construction. The Small Project SWM Application allows documentation of new impervious surface, credits through disconnection of impervious surfaces and tree planting, and sizing of Volume Control BMP's that may be required.
- C. Stormwater runoff Volume Controls shall be implemented using the *Design Storm Method* or the *Simplified Method* as defined below. For Regulated Activity areas equal or less than one (1) acre that do not require hydrologic routing to design the stormwater facilities, this Ordinance establishes no preference for either method; therefore, the Applicant may select either method on the basis of economic considerations, the intrinsic limitations on applicability of the analytical procedures associated with each methodology, and other factors.

1. The *Design Storm Method* (CG-1 in the BMP Manual) is applicable to any sized Regulated Activity. This method requires detailed modeling based on site conditions.

a. Do not increase the post-development total runoff volume when compared to the pre-development total runoff volume for the 2-year/24-hour storm event.

b. For hydrologic modeling purposes:

i. Existing non-forested pervious areas must be considered meadow (good condition) for pre-development hydrologic calculations.

ii. Twenty (20) percent of existing impervious area, when present within the proposed project site, shall be considered meadow (good condition) for pre-development hydrologic calculations for re-development.

2. The *Simplified Method* (CG-2 in the BMP Manual) is independent of site conditions and should be used if the *Design Storm Method* is not followed. This method is not applicable to Regulated Activities greater than 1 acre or for projects that require detailed design of stormwater storage facilities. For new impervious surfaces:

a. Stormwater facilities shall capture at least the first 2 inches of runoff from all new impervious surfaces.

b. At least the first 1 inch of runoff from new impervious surfaces shall be permanently removed from the runoff flow, i.e. it shall not be released into surface Waters of the Commonwealth. Removal options include reuse, evaporation, transpiration, and infiltration.

c. Wherever possible, infiltration facilities should be designed to accommodate infiltration of the entire permanently removed runoff; however, in all cases at least the first 0.5 inch of the permanently removed runoff should be infiltrated.

d. Actual field infiltration tests at the location of the proposed elevation of the stormwater BMPs are required. Infiltration test shall be conducted in accordance with the BMP Manual. Notification of the Township shall be provided to allow witnessing of the testing.

3. In cases where it is not possible or desirable to use infiltration-based best management practices to partially fulfill the requirements in either Section 304.B.1 or 304.B.2, the following procedure shall be used:

a. At a minimum, the following documentation shall be provided to justify the decision to not use infiltration BMPs:

i. Description of and justification for field infiltration/permeability testing with respect to the type of test and test locations).

ii. An interpretive narrative describing existing site soils and their structure as these relate to the interaction between soils and water occurring on the site. In addition to providing soil and soil profile descriptions, this narrative shall identify depth to seasonal high water tables and depth to bedrock, and provide a description of all subsurface elements (fragipans and other restrictive layers, geology, etc.) that influence the direction and rate of subsurface water movement.

iii. A qualitative assessment of the site's contribution to annual aquifer recharge shall be made, along with identification of any restrictions or limitations associated with the use of engineered infiltration facilities.

iv. The provided documentation must be signed and sealed by a professional engineer or geologist.

- b. The following water quality pollutant load reductions will be required for all disturbed areas within the proposed development:

Pollutant Load	Units	Required Reduction (%)
Total Suspended Solids (TSS)	Pounds	85
Total Phosphorous (TP)	Pounds	85
Total Nitrate (NO ₃)	Pounds	50

- c. The performance criteria for water quality best management practices shall be determined from the Pennsylvania Stormwater Best Management Practices Manual, most current version.
- D. The applicable Worksheets from the BMP Manual must be used in calculations to establish Volume Control.

Section 305. Rate Controls

- A. Lands contained within Washington County that have not had release rates established under an approved Act 167 Stormwater Management Plan:
1. Post-development discharge rates shall not exceed 90% of the pre-development discharge rates for the 1-, 2-, 10-, 25-, 50-, and 100-year storms.
 2. In order to achieve this, it is recommended that methods be considered that will direct runoff from impervious areas to pervious areas or infiltration trenches that will retain, detain the runoff, or, by some other means suitable to the Township.
 3. The post-developed 25-year storm event peak discharge shall not exceed the capacity of downstream stormwater facilities.
- B. Lands contained within Washington County that have had release rates established under an approved Act 167 Stormwater Management Plan:
1. Chartiers Creek Watershed: The post-development peak discharge rates shall be in accordance with the approved release rate map for the individual watershed. Release rates include 50%, 70% and 100% for the 10-, 25-, 50- and 100-year storms.

ARTICLE IV - E&S STANDARDS

Section 401. Erosion and Sedimentation Requirements During Earth Disturbance Activities

- A. The Applicant shall meet requirements as contained in 25 PA Code, Chapters 92 and 102 as required and applicable as follows:
 1. The implementation and maintenance of erosion and sediment control BMPs.
 2. Development of written plans.
 3. Submission of plans for approval.
 4. Obtaining Erosion and Sediment Control and NPDES permits.
 5. Maintaining plans and permits on site.
- B. Evidence of any necessary plan or permit approval for Earth Disturbance activities from PADEP or the Washington County Conservation District must be provided to the Township.
- C. A copy of the approved Erosion and Sediment Control Plan and any other permit, as required by PADEP or the Washington County Conservation District, shall be available at the project site at all times if required under Chapter 102.
- D. Construction of temporary roadways (e.g., for utility construction, timber harvesting, etc.) shall comply with all applicable standards for erosion and sedimentation control and stream crossing regulations under 25 PA Code, Chapters 102 and 105. The Erosion and Sedimentation Control Plan shall be submitted to the Washington County Conservation District for approval and shall address the following, as applicable:
 1. Design of the roadway system, including haul roads, skid roads, landing areas, trails, and storage and staging areas.
 2. Runoff control structures (e.g., diversions, culverts, detention ponds, etc.).
 3. Stream crossings for both perennial and intermittent streams.
 4. Access to public roadways, including design of rock construction entrance for mud and debris control.
 5. A remediation plan for restoring the disturbed area through re-grading, topsoil placement, reseeding, and other stabilization techniques, as required.
- E. Additional erosion and sedimentation control design standards and criteria that must be applied where infiltration BMPs are proposed include the following:
 1. Areas proposed for infiltration BMPs shall be protected from sedimentation and compaction during the construction phase, as to maintain their maximum infiltration capacity.
 2. Infiltration BMPs shall be protected from receiving sediment-laden runoff. The source of protection for infiltration BMPs shall be identified (i.e. orange construction fence surrounding the perimeter of the BMP).

ARTICLE V – PROTECTED WATERSHED STANDARDS

Reserved.

ARTICLE VI – RIPARIAN BUFFER STANDARDS

Section 601. Riparian Buffer Requirements

Where a Riparian Buffer is required for a Regulated Activity, the Riparian Buffer shall be established as follows:

- A. The buffer shall be measured perpendicularly from the top of the stream bank landward.
 1. All watersheds - a minimum of 50 feet; or
 2. As required by state or federal regulations; or
 3. As determined by a stream corridor study approved by PADEP and the Township.
- B. The riparian buffer shall be located on both sides of all perennial and intermittent streams. The perennial and intermittent streams and the riparian buffer boundaries shall be shown on all applications for Building Permits, subdivision, or land development. Existing uses within the buffer are permitted to continue but not be expanded. Placement of new structures or roadways within the riparian buffer shall be prohibited. Where a wetland exists within the buffer area, the buffer shall be extended landward to provide a minimum buffer of 25 feet, as measured perpendicularly from the wetland boundary.
- C. The buffer shall be undisturbed forest consisting of appropriate native species.
- D. Where wetlands are located partially or entirely within a buffer, the buffer shall be extended to encompass the wetland and shall be widened by a distance sufficient to provide a 25 foot forested buffer measured perpendicularly from the wetland boundary.
- E. The following uses shall be permitted in the buffer:
 1. Footpaths, trails and bike paths provided that:
 - a. Width is limited to 5 feet;
 - b. Width may be increased provided a corresponding increase in the buffer is provided;
 - c. Construction shall have minimal impact to the buffer.
 2. Stream crossings, provided the crossing is designed and constructed in such a manner as to minimize the impact to the buffer. The Riparian Buffer shall be restored to its original condition, to the maximum extent practical, upon completion of construction.
 3. Utility lines, provided that the crossing is designed and constructed in such a manner as to minimize the impact to the inner buffer and provided that there is no practical alternative to locating the utility line within the buffer. The Riparian Buffer shall be restored to its original condition, to the maximum extent practical, upon completion of construction. Sanitary sewer lines (new and repairs to existing) may be constructed linearly through the Riparian Buffer.
 4. Maintenance and restoration of the Riparian Buffer.
 5. Projects conducted with the objective of improvement, stabilization, restoration, or enhancement of the stream bank, stream channel, floodplain, watershed hydrology, riparian buffers, or aquatic habitat and maintenance activities associated with such projects. These projects include, but are not limited to agricultural and stormwater management best management practices. Such projects must receive appropriate permits and approvals from PADEP prior to starting the project.

6. Minor private recreational uses for the property owner. Such uses include benches, fire rings, and similar uses. Such uses do not include structures such as cabins, sheds, pavilions, garages, dwellings or similar structures.
- F. Disturbance of the Riparian Buffer shall be limited to the area necessary to perform an allowable use.
- G. Where possible and practical, disturbances shall be phased with each phase restored prior to beginning the next phase.
- H. Allowable activities shall not cause stormwater flow to concentrate.
- I. Any vegetation removed for an allowable activity shall be replaced immediately upon completion of the activity. Where mature trees are removed, such trees shall be replaced with the largest practical tree of acceptable native species.
- J. Erosion and sediment pollution control shall be installed and maintained during construction. Evidence of an approved Erosion and Sediment Control Plan and/or NPDES Permit, if required, shall be submitted prior to issuance of local permits.
- K. If a permit from PADEP is required for the activity, evidence of an approved permit shall be submitted prior to issuance of local permits.
- L. Proper maintenance of riparian buffers is the responsibility of the Land Owner consistent with sound forest management practices. In the absence of a site specific management plan, the following maintenance guidelines apply:
 1. Buffers shall be inspected periodically by the Land Owner for evidence of excessive sediment deposition, erosion or concentrated flow channels. Prompt action shall be taken to correct these problems and prevent future occurrence.
 2. Trees presenting an unusual hazard of creating downstream obstructions shall be removed. Such material shall be removed from the floodplain or the riparian buffer (whichever is widest); or cut into sections small enough so as to prevent the possibility of creating obstructions downstream. Wherever possible, large stable debris should be conserved.
 3. Vegetation should be inspected periodically to ensure diverse vegetative cover and vigorous plant growth consistent with buffering objectives.
 4. Excessive use of fertilizers, pesticides, herbicides, and other chemicals shall be avoided. These products should be used only when absolutely necessary to maintain buffer vegetation.

Section 402. Riparian Buffer Easement

For all required Riparian Buffers, an easement shall be provided to allow the Township to take enforcement actions against an Applicant for failure to satisfy the requirements of the Riparian Buffer requirements.

- A. Easements shall be in accordance with Section 901 and recorded in accordance with Section 1403 of this Ordinance.

ARTICLE VII - DESIGN CRITERIA

Section 701. Design Criteria for Stormwater Management & Drainage Facilities

A. General Design Guidelines:

1. Stormwater shall not be transferred from one watershed to another, unless (1) the watersheds are sub-watersheds of a common watershed which join together within the perimeter of the property; (2) the effect of the transfer does not alter the peak rate discharge onto adjacent lands; or (3) easements from the affected landowner(s) are provided.
2. Consideration shall be given to the relationship of the subject property to the drainage pattern of the watershed. A concentrated discharge of stormwater to an adjacent property shall be within an existing watercourse or confined in an easement or returned to a pre-development flow type condition.
3. Stormwater BMPs and recharge facilities are encouraged (e.g., rooftop storage, drywells, cisterns, recreation area ponding, diversion structures, porous pavements, holding tanks, infiltration systems, in-line storage in storm sewers, and grading patterns). They shall be located, designed, and constructed in accordance with the latest technical guidance published by PADEP, provided they are accompanied by detailed engineering plans and performance capabilities and supporting site specific soils, geology, runoff and groundwater and infiltration rate data to verify proposed designs. Additional guidance from other sources may be accepted at the discretion of the Township Engineer (a pre-application meeting is suggested).
4. All existing and natural watercourses, channels, drainage systems and areas of surface water concentration shall be maintained in their existing condition unless an alteration is approved by the appropriate regulatory agency.
5. The design of all stormwater management facilities shall incorporate sound engineering principles and practices. The Township shall reserve the right to disapprove any design that would result in the continuation or exacerbation of a documented adverse hydrologic or hydraulic condition within the watershed, as identified in the Plan.
6. The design and construction of multiple use stormwater detention facilities are strongly encouraged. In addition to stormwater management, facilities should, where appropriate, allow for recreational uses including ball fields, play areas, picnic grounds, etc. Consultation with the Township, and prior approval are required before design. Provision for permanent wet ponds with stormwater management capabilities may also be appropriate.
 - a. Multiple use basins should be constructed so that potentially dangerous conditions are not created.
 - b. Water quality basins or recharge basins that are designed for a slow release of water or other extended detention ponds are not permitted for recreational uses, unless the ponded areas are clearly separated and secure.
7. Should any stormwater management facility require a dam safety permit under PADEP Chapter 105, the facility shall be designed in accordance with Chapter 105 and meet the regulations of Chapter 105 concerning dam safety.

701.B Stormwater Management Facility Design Considerations: All stormwater management facilities shall meet the following design requirements:

1. No outlet structure from a stormwater management facility, or swale, shall discharge directly onto a Township, County or State roadway. All discharges must be to an existing downstream water course with a defined bed and bank or to a storm sewer system with adequate capacity to convey the 100-year design storm event.
2. The top, or toe, of any slope shall be located a minimum of 10 feet or greater from any property line.
3. The minimum horizontal distance between any structure and any impoundment area within a stormwater facility shall be 25 feet. The lowest floor elevation of any structure constructed immediately adjacent to a detention basin or other stormwater facility shall be a minimum of 2 feet above the 100-year water surface elevation.
4. Stormwater management facility bottom (or surface of permanent pool) elevations must be greater than adjacent floodplain elevations (FEMA or HEC-RAS analysis). If no floodplain is defined, bottom elevations must be greater than existing ground elevations 50 feet from top of stream bank in the facilities' vicinity.
5. Basin outflow culverts discharging into floodplains must account for tailwater. Tailwater corresponding to the 100-year floodplain elevation must be used for all 24-hour design storms, or the Applicant may elect to determine flood elevations of the adjacent watercourse for each 24-hour design storm. The floodplain is assumed to be 50 feet from top of stream bank in areas where a floodplain is not designated, or no other evidence is provided.
6. The invert of all stormwater management facilities and underground infiltration/storage facilities shall be located a minimum of 2 feet above the seasonal high groundwater table. The invert of stormwater facilities may be lowered if adequate sub-surface drainage is provided.
7. Whenever possible the side slopes and basin shape shall be amenable to the natural topography. Vertical side slopes and rectangular basins shall be avoided whenever possible.
8. Exterior slopes of compacted soil shall not exceed 3:1, and may be further reduced if the soil has unstable characteristics. A Geotechnical Report is required for the construction of all stormwater basins, embankments, and infiltration BMP's.
9. Interior slopes of the basin shall not exceed 3:1.
10. Unless specifically designed as a volume control facility, all stormwater management facilities shall have a minimum slope of 1% extending radially out from the principal outlet structure. Facilities designed as water quality / infiltration BMPs may have a bottom slope of zero.
11. Impervious low-flow channels are not permitted within stormwater management facilities.
12. Unless specifically designed as a Volume Control or water quality facility, all stormwater management facilities must empty over a period of time not less than 24 hours and not more than 72 hours from the end of the facility's inflow hydrograph. Infiltration tests

performed at the facility locations and proposed basin bottom depths, in accordance with the BMP Manual, must support time-to-empty calculations if infiltration is a factor.

13. Energy dissipators and/or level spreaders shall be installed at points where pipes or drainageways discharge to or from basins. Discharges to drainage swales shall be dissipated, or piped, to an acceptable point.
14. Landscaping and planting specifications must be provided for all stormwater management basins and be specific for each type of basin.
 - a. Minimal maintenance, saturation tolerant vegetation must be provided in basins designed as water quality / infiltration BMPs.
15. A safety fence may be required, at the discretion of the Township, for any stormwater management facility, and is required for any impoundment areas that exceed 2-feet in depth. The fence shall be a minimum of 4 feet high, and of a material acceptable to the Township. A gate with a minimum opening of 10 feet shall be provided for maintenance access.
16. Principal Outlet Structures: The primary outlet structure shall be designed to pass all 24-hour design storms (up to and including the 100-year event) without discharging through the emergency spillway. All principal outlet structures shall:
 - a. Be constructed of reinforced concrete and shall:
 - i. Have a concrete base attached with a watertight connection. The base shall be sufficient weight to prevent flotation of the riser.
 - ii. Provide a trash rack or similar appurtenance to prevent debris from entering the riser.
 - iii. Provide an anti-vortex device, consisting of a thin vertical plate normal to the basin berm.
 - b. Provide trash racks to prevent clogging of primary outflow structure stages for all orifices equivalent to 12 inches or smaller in diameter.
 - c. Provide outlet aprons and shall extend to the toe of the basin slope and or a natural drainage course at a minimum.
17. Emergency Spillways: Any stormwater management facility designed to store runoff shall provide an emergency spillway designed to convey the entire 100-year post-development peak rate flow with a blocked primary outlet structure with an impoundment of water up to the elevation of the emergency spillway. The emergency spillway shall be designed per the following requirements:
 - a. The top of embankment elevation shall provide a minimum 2 feet of freeboard above the maximum water surface elevation and at least 6-inches above the highest principal outlet. This is to be calculated when the spillway functions for the 100-year post-development inflow, with a blocked outlet structure and an impoundment of water up to the elevation of the emergency spillway.
 - b. Avoid locating on fill areas, whenever possible.
 - c. The spillway shall be armored to prevent erosion during the 100-year post-development flow, with a blocked primary outlet structure.
 - i. Synthetic liners or riprap may be used, and calculations sufficient to support proposed armor must be provided. An earthen plug must be used to accurately control the spillway invert if riprap is the proposed armoring material. Emergency spillway armor must extend up the sides of the spillway, and continue at full width to a minimum of 10 feet past the toe of slope.

- d. Township may require the use of additional protection when slopes exceed 4:1 and spillway velocities might exceed NRCS standards for the particular soils involved.
- e. Any underground stormwater management facility (pipe storage systems) must have a method to bypass flows higher than the required design (up to a 100-year post-development inflow) without structural failure, or causing downstream harm or safety risks.

18. Stormwater Management Basins: Design of stormwater management facilities having 3 feet or more of water depth (measured vertically from the lowest elevation in the facility to the crest of the emergency spillway) shall meet the following additional requirements:

- a. The maximum water depth within any stormwater management facility shall be no greater than 8 feet when functioning through the primary outlet structure.
- b. The top of embankment width shall be at least 10 feet.
- c. A 10 foot wide access to the basin bottom must be provided with a maximum longitudinal slope of 10%.
- d. Berms shall be constructed using soils that conform to the unified soil classification of CH, MH, CL or ML. The embankments will be constructed in a maximum of 6 inch lifts. The lifts will each be compacted to a density of 98% of a standard proctor analysis as per each layer of compacted fill shall be tested to determine its density analysis per ASTM 698. Each layer of compacted fill shall be tested to determine its density per ASTM 2922 or ASTM 3017.
- e. A cutoff and key trench of impervious material shall be provided under all embankments 4 feet or greater in height. The cutoff trench shall run the entire length of the embankment and tie into undisturbed natural ground.
- f. Anti-seep collars, or a PADEP approved alternative, must be provided on all outflow culverts in accordance with the methodology contained in the latest edition of the PADEP E&S Manual. An increase in seepage length of 15 percent must be used in accordance with the requirements for permanent anti-seep collars.
- g. Geotechnical Reports are required with supporting soil samples, which provide recommendations for the construction of the embankment.
- h. Field measured infiltration rates must be provided for all infiltration BMP's.

19. Construction of Stormwater Management Facilities:

- a. Basins used for rate control only shall be installed prior to or concurrent with any earthmoving or land disturbances, which they will serve. The phasing of their construction shall be noted in the narrative and on the plan.
- b. Basins that include water quality or recharge components shall have those components installed in such a manner as to not disturb or diminish their effectiveness.

- c. Compaction test reports shall be kept on file at the site and be subject to review at all times with copies being forwarded to the Township Engineer upon request.
 - d. Temporary and permanent grasses or stabilization measures shall be established on the sides and base of all earthen basins within 15 days of construction.
20. Exceptions to these requirements may be made at the discretion of the Municipality for BMPs that retain or detain water, but are of a much smaller scale than traditional stormwater management facilities.

B. Stormwater Carrying Facilities:

- 1. All storm sewer pipes, grass waterways, open channels, swales and other stormwater carrying facilities that service drainage areas within the site must be able to convey post-development runoff from the 100-year 24-hour design storm.
- 2. Stormwater management facilities that convey off-site water through the site shall be designed to convey the 100-year storm event.
- 3. All developments shall include provisions that allow for the overland conveyance and flow of the post-development 100-year storm event without damage to public or private property.

4. Storm Sewers:

- a. Storm sewers must be able to convey post-development runoff without surcharging inlets for the 100-year storm event. The hydraulic grade lines must be contained within the structures and pipes.
- b. When connecting to an existing storm sewer system, the Applicant must demonstrate that the proposed system will not exacerbate any existing stormwater problems and that adequate downstream capacity exists.
- c. Inlets, manholes, pipes, and culverts shall be constructed in accordance with the specifications set forth in PENNDOT's Publication 408, and as detailed in the PENNDOT's Publication 72M - Standards for Roadway Construction (RC) or other detail approved by the Township. All material and construction details (inlets, manholes, pipe trenches, etc.), must be shown on the SWM Site Plan, and a note added that all construction must be in accordance with PENNDOT's Publication 408 and PENNDOT's Publication 72M, latest edition. A note shall be added to the plan stating that all frames, concrete top units, and grade adjustment rings shall be set in a bed of full mortar according to Publication 408. Suppliers must be listed in PennDOT's Bulletin 15.
- d. A minimum pipe size of fifteen (15) inches in diameter shall be used in all roadway systems (public or private) proposed for construction in the Township. Pipes shall be designed to provide a minimum velocity of 2-1/2 feet per second when flowing full, but in all cases, the slope shall be no less than 1.0%. All pipes shall be smooth flow polyethylene pipe (ADS-N12) or reinforced concrete pipe. Changes in horizontal or vertical direction of pipes shall be accomplished by installing a catch basin or a manhole.
- e. All storm sewer pipes shall be laid to a minimum depth of 1 foot from subgrade to the crown of pipe.

- f. In curbed roadway sections, the maximum encroachment of water on the roadway pavement shall not exceed half of a through travel lane or one (1) inch less than the depth of curb during the one hundred (100) year design storm of five (5) minute duration. Gutter depth shall be verified by inlet capture/capacity calculations that account for road slope and opening area.
 - i. Inlets shall be placed at a maximum of 600 feet apart.
 - ii. Inlets shall be placed so drainage cannot cross intersections or street centerlines.
- g. Standard Type "C" inlets with 8 inch hoods shall be used along curbed roadway networks. Type "C" inlets with 10 inch hoods that provide a 2 inch sump condition may be used with approval of the Township when roadway longitudinal slopes are 1.0% or less.
- h. For inlets containing a change in pipe size, the elevation for the crown of the pipes shall be the same or the smaller pipe's crown shall be at a higher elevation.
- i. All inlets shall provide a minimum 2 inch drop between the lowest inlet pipe invert elevation and the outlet pipe invert elevation.
- j. On curbed sections, a double inlet shall be placed at the low point of sag vertical curves, or an inlet shall be placed on each side of the low point at a distance not to exceed 100 feet, or at an elevation not to exceed 0.2 feet above the low point.
- k. At all roadway low points, swales and easements shall be provided behind the curb or swale and through adjacent properties to channelize and direct any overflow of stormwater runoff away from dwellings and structures.
- l. All inlets in paved areas shall have heavy duty bicycle safe grating. A note to this effect shall be added to the SWM Site Plan or inlet details therein.
- m. Inlets must be sized to accept the specified pipe sizes without knocking out any of the inlet corners. All pipes entering or exiting inlets shall be cut flush with the inside wall of the inlet. A note to this effect shall be added to the SWM Site Plan or inlet details therein.
- n. Inlets shall have weep holes covered with geotextile fabric placed at appropriate elevations to completely drain the sub grade prior to placing the base and surface course on roadways.
- o. Inlets, junction boxes, or manholes greater than five (5) feet in depth shall be equipped with ladder rungs and shall be detailed on the SWM Site Plan.
- p. Inlets shall not have a sump condition in the bottom (unless designed as a water quality BMP). Pipe shall be flush with the bottom of the box or concrete channels shall be poured.
- q. Accessible drainage structures shall be located on continuous storm sewer system at all vertical dislocations, at all locations where a transition in storm sewer pipe sizing is required, at all vertical and horizontal angle points

exceeding 5 degrees, and at all points of convergence of 2 or more storm sewer pipes.

- r. All storm drainage piping shall be provided with reinforced concrete headwalls or endwalls compatible with the pipe size involved at its entrance/exit and discharge.
- s. Outlet protection and energy dissipaters shall be provided at all surface discharge points in order to minimize erosion consistent with the E&S Manual.
 - i. Flow velocities and volumes from any storm sewer shall not result in a degradation of the receiving channel.
 - ii. Sizing calculations for the rock aprons and riprap size shall be calculated and provided.
- t. Stormwater roof drains and pipes shall not be connected to storm sewers or discharge onto impervious areas without approval by the Township Engineer.

5. Swale Conveyance Facilities:

- a. Swales must be able to convey post-development runoff from a 100-year 24-hour design storm with 6 inches of freeboard to top of the swale, and be a minimum of 1-foot deep.
- b. Swales shall have side slopes no steeper than 3:1.
- c. All swales shall be designed, labeled on the SWM Site Plan, and details provided to adequately construct and maintain the design dimension of the swales.
- d. Swales shall be designed for stability using velocity or shear criteria. Velocity criteria may be used for channels with less than 10% slope. Shear criteria may be used for all swales. Documentation must be provided to support velocity and/or shear limitations used in calculations. Stormwater velocities in swales shall be calculated for both the pre-stabilized and stabilized conditions. The type of swale lining to be utilized shall be specifically indicated. Verification that the velocity in the swale does not exceed the permissible velocity for the design swale lining (pre-stabilized and stabilized) shall be provided.
- e. Where swale bends occur, the computed velocities or shear stresses shall be multiplied by the following factor for the purpose of designing swale erosion protection:
 - i. 1.75 – When swale bend is 30 to 60 degrees
 - ii. 2.00 – When swale bend is 60 to 90 degrees
 - iii. 2.50 – When swale bend is 90 degrees or greater

Manning's "n" values used for swale capacity design must reflect the permanent condition.

Section 702. Calculation Methodology

- A. All calculations shall be consistent with the guidelines set forth in the BMP Manual, as amended herein.

- B. Stormwater runoff from all development sites shall be calculated using either the Rational Method or the NRCS Rainfall-Runoff Methodology. Methods shall be selected by the design professional based on the individual limitations and suitability of each method for a particular site.

C. Rainfall Values:

1. Rational Method – The Pennsylvania Department of Transportation Drainage Manual, Intensity-Duration-Frequency Curves, Publication 584, Chapter 7A, latest edition, shall be used in conjunction with the appropriate time of concentration and return period.
2. NRCS Rainfall-Runoff Method – The Soil Conservation Service Type II, 24-hour rainfall distribution shall be used in conjunction with rainfall depths from NOAA Atlas 14 or be consistent with the following table:

Return Interval in years	24-hour Rainfall Total in inches
1	1.99
2	2.38
10	3.35
25	3.96
50	4.46
100	4.99

D. Runoff Volume:

1. Rational Method – Not to be used to calculate runoff volume.
2. NRCS Rainfall-Runoff Method – This method shall be used to estimate the change in volume due to Regulated Activities. Combining Curve Numbers for land areas proposed for development with Curve Numbers for areas unaffected by the proposed development into a single weighted curve number is NOT acceptable.

E. Peak Flow Rates:

1. Rational Method – This method may be used for design of conveyance facilities only. Extreme caution should be used by the design professional if the watershed has more than one main drainage channel, if the watershed is divided so that hydrologic properties are significantly different in one versus the other, if the time of concentration exceeds 60 minutes, or if stormwater runoff volume is an important factor. The combination of Rational Method hydrographs based on timing shall be prohibited.
2. NRCS Rainfall-Runoff Method – This method is recommended for design of stormwater management facilities and where stormwater runoff volume must be taken into consideration. The following provides guidance on the model applicability:
 - a. NRCS's TR-55 – limited to 100 acres in size
 - b. NRCS's TR-20 or HEC-HMS – no size limitations
 - c. Other models as pre-approved by the Municipal Engineer

The NRCS antecedent runoff condition II (ARC II, previously AMC II) must be used for all simulations. The use of continuous simulation models that vary the ARC are not permitted for stormwater management purposes.

3. For comparison of peak flow rates, flows shall be rounded to a tenth of a cubic foot per second (cfs).

F. Runoff Coefficients:

1. Rational Method – Use Table C-1 (Appendix C).
2. NRCS Rainfall-Runoff Method – Use Table C-2 (Appendix C). Curve Numbers (CN) should be rounded to tenths for use in hydrologic models as they are a design tool with statistical variability. For large sites, CN's should realistically be rounded to the nearest whole number.
3. For the purposes of pre-development peak flow rate and volume determination, existing non-forested pervious areas conditions shall be considered as meadow (good condition).
4. For the purposes of pre-development peak flow rate and volume determination, 20 percent of existing impervious area, when present, shall be considered meadow (good condition).

G. 24-hour design storm:

1. All stormwater management facilities shall be verified by routing the proposed 1-year, 2-year, 10-year, 25-year, 50-year, and 100-year hydrographs through the facility using the storage indication method or modified puls method. The 24-hour design storm hydrograph shall be computed using a calculation method that produces a full hydrograph.
2. The stormwater management and drainage system shall be designed to safely convey the post development 100-year storm event to stormwater detention facilities, for the purpose of meeting peak rate control.
3. All structures (culvert or bridges) proposed to convey runoff under a Municipal road shall be designed to pass the 50-year design storm with a minimum 1 foot of freeboard measured below the lowest point along the top of the roadway.

H. Time of Concentration:

1. The Time of Concentration is to represent the average condition that best reflects the hydrologic response of the area. The following Time of Concentration (T_c) computational methodologies shall be used unless another method is pre-approved by the Municipal Engineer:

a. Pre-development – NRCS's Lag Equation:

Time of Concentration = $T_c = [(T_{lag}/.6) * 60]$ (minutes)

$$T_{lag} = L^{0.8} \frac{(S+1)^{0.7}}{1900\sqrt{Y}}$$

Where:

T_{lag} = Lag time (hours)

L = Hydraulic length of watershed (feet)

Y = Average overland slope of watershed (percent)

S = Maximum retention in watershed as defined by: $S = [(1000/CN) - 10]$

CN = NRCS Curve Number for watershed

- b. Post-development; commercial, industrial, or other areas with large impervious areas (>20% impervious area) – NRCS Segmental Method. The length of sheet flow shall be limited to 100 feet. T_c for channel and pipe flow shall be computed using Manning's equation.
- c. Post-development; residential, cluster, or other low impact designs less than or equal to 20% impervious area – NRCS Log Equation or NRCS Segmental Method.

2. Additionally, the following provisions shall apply to calculations for Time of Concentration:

- a. The post-development T_c shall never be greater than the pre-development T_c for any watershed or sub-watershed. This includes when the designer has specifically used swales to reduce flow velocities. In the event that the designer believes that the post-development T_c is greater, it will still be set by default equal to the pre-development T_c for modeling purposes.
 - b. The minimum T_c for any watershed shall be 5 minutes.
 - c. The designer may choose to assume a 5 minute T_c for any post development watershed or subwatershed without providing any computations.
 - d. The designer must provide computations for all pre-development T_c paths. A 5 minute T_c can not be assumed for pre-development.
 - e. Undetained fringe areas (areas that are not tributary to a stormwater facility but where a reasonable effort has been made to convey runoff from all new impervious coverage to best management practices) may be assumed to represent the pre-development conditions for purpose of T_c calculation.
- I. Drainage areas tributary to sinkholes or closed depressions in areas underlain by limestone or carbonate geologic features shall be excluded from the modeled point of analysis defining pre-development flows. If left undisturbed during construction activities, areas draining to closed depressions may also be used to reduce peak runoff rates in the post-development analysis. New, additional contributing runoff should not be directed to existing sinkholes or closed depressions.
- J. Where uniform flow is anticipated, the Manning's equation shall be used for hydraulic computations and to determine the capacity of open channels, pipes, and storm sewers. The Manning's equation should not be used for analysis of pipes under pressure flow or for analysis of culverts. Manning's "n" values shall be obtained from PENNDOT's Drainage Manual, Publication 584. Inlet control shall be checked at all inlet boxes to ensure the headwater depth during the 10-year design event is contained below the top of grate for each inlet box.
- K. The Township may approve the use of any generally accepted full hydrograph approximation technique that shall use a total runoff volume that is consistent with the volume from a method that produces a full hydrograph.
- L. The Township has the authority to require that computed existing runoff rates be reconciled with field observations, conditions and site history. If the designer can substantiate, through actual physical calibration, that more appropriate runoff and time of concentration values

should be utilized at a particular site, then appropriate variations may be made upon review and recommendation of the Township.

Section 703. Downstream Hydraulic Capacity Analysis

- A. Any downstream or off-site hydraulic capacity analysis conducted in accordance with this Ordinance or as required by the Township shall use the following criteria for determining adequacy:
1. Natural or man-made channels or swales must be able to convey the post-development runoff associated with a 10-year return period event within their banks at velocities consistent with protection of the channels from erosion. Acceptable velocities shall be based upon criteria included in the PADEP *Erosion and Sediment Pollution Control Program Manual*.
 2. Natural or man-made channels or swales must be able to convey the post-development 100-year return period runoff without creating any hazard to persons or property.
 3. Culverts, bridges, storm sewers or any other facilities which must pass or convey flows from the tributary area must be designed in accordance with PADEP, Chapter 105 regulations (if applicable) and, at a minimum, pass the post-development 25-year return period runoff.
 4. It must be demonstrated that the downstream conveyance channel, other stormwater facilities, roadways, or overland areas must be capable of safely conveying the 100-year 24-hour design storm without causing additional damage to buildings or other infrastructure.

Where the downstream conveyance channel or other facility is located within a special flood hazard area (as documented on the Flood Insurance Rate Map), it must be demonstrated that the limits of said flood hazard area are not increased by the proposed activity.

ARTICLE VIII - SWM SITE PLAN & REPORT REQUIREMENTS

Section 801. General Requirements

For any of the activities regulated by this Ordinance and not eligible for the exemptions provided in Section 302, the final approval of subdivision and/or land development plans, the issuance of any building or occupancy permit, or the commencement of any land disturbance activity, may not proceed until the Applicant has received written approval of a SWM Site Plan from the Township.

The design of all stormwater management facilities shall incorporate sound engineering principals and practices. The Township shall reserve the right to disapprove any design that would result in the occurrence or perpetuation of an adverse hydrologic or hydraulic condition within the watershed.

The Township reserves the right to request additional information and/or calculations necessary for its review and may approve methods of calculation not specified in this Ordinance.

The Township or its designated representative shall be afforded access to inspect all phases of the installation of the permanent stormwater management facilities.

During any stage of the work, if the Township determines that the permanent stormwater management facilities are not being installed in accordance with the approved Stormwater Management Plan, the Township shall revoke any existing permits until a revised Drainage Plan is submitted and approved, as specified in this Ordinance.

Section 802. SWM Site Plan & Report Contents

The SWM Site Plan & SWM Site Report shall consist of all applicable calculations, maps, and plans. All SWM Site Plan materials shall be submitted to the Township in a format that is clear, concise, legible, neat and well organized; otherwise, the SWM Site Plan shall be rejected. A note on the maps shall refer to the associated computations Stormwater Management Report and Erosion and Sedimentation Control Plan by title and date. The cover sheet of the computations and Erosion and Sedimentation Control Plan shall refer to the associated maps by title and dated. All Stormwater Management Plan and Report materials shall be submitted to the Township in a format that is clear, concise, legible, neat, and well organized; otherwise, the Plan shall be disapproved and returned to the Applicant.

Appropriate sections from the Township Subdivision and Land Development Ordinance, and other applicable local ordinances, shall be followed in preparing the SWM Site Plan.

A. SWM Site Plan shall include, but not be limited to:

1. Plans shall be of one size and in a form that meets the requirements for recording in the Office of the Recorder of Deeds of Washington County.
 - a. Plans for tracts of less than 20 acres shall be drawn at a scale of one inch equals no more than 50 ft.;
 - b. Plans for tracts of 20 acres or more, plans shall be drawn at a scale of one inch equals no more than 100 ft;
 - c. All lettering shall be drawn to a size to be legible if the plans are reduced to half size.
2. The name of the development; name and location address of the property site; name, address, and telephone number of the Applicant/Owner of the property; and name,

address, telephone number, email address, and engineering seal of the individual preparing the SWM Site Plan.

3. The date of submission and dates of all revisions.
4. A graphical and written scale on all drawings and maps.
5. A north arrow on all drawings and maps.
6. A location map at a minimum scale of one (1) inch equals one-thousand (1,000) feet and illustrates the project relative to highways, municipalities or other identifiable landmarks.
7. Metes and bounds description of the entire tract perimeter.
8. Existing and final contours at intervals:
 - a. Slopes less than 5%: no greater than one (1) foot;
 - b. Slopes between 5 and 15%: no greater than two (2) feet;
 - c. Steep slopes (greater than 15%): 5-foot contour intervals may be used.
9. Perimeters of existing waterbodies within the project area including stream banks, lakes, ponds, springs, field delineated wetlands or other bodies of water, sinkholes, flood hazard boundaries (FEMA delineated floodplains and floodways), areas of natural vegetation to be preserved, the total extent of the upstream area draining through the site, and overland drainage paths. In Addition, any areas necessary to determine downstream impacts, where required for proposed stormwater management facilities must be shown.
10. The location of all existing and proposed utilities, on-lot wastewater facilities, water supply wells, sanitary sewers, and water lines on and within fifty (50) feet of property lines including inlets, manholes, valves, meters, poles, chambers, junction boxes, and other utility system components.
11. A key map showing all existing man-made features beyond the property boundary that may be affected by the project.
12. Soil names and boundaries with identification of the Hydraulic Soil Group classification including rock outcroppings.
13. Proposed impervious surfaces (structures, roads, paved areas, and buildings), including plans and profiles of roads and paved areas and floor elevations of buildings.
14. Existing and proposed land use(s).
15. Horizontal alignment, vertical profiles, and cross sections of all open channels, pipes, swales and other BMPs.
16. Overland drainage paths.
17. The location and clear identification of the nature of permanent stormwater BMPs.
18. The location of all erosion and sedimentation control facilities, shown on a separate from the SWM Site Plan (typically an E&S Plan).

19. A minimum twenty (20) foot wide access easement around all stormwater management facilities that would provide ingress to and egress from a public right-of-way. In lieu of providing an easement to the public right-of-way, a note may be added to the plan granting the Municipality or their designees access to all easements via the nearest public right-of-way.

20. Construction details for all drainage and stormwater BMPs.

21. Identification of short-term and long-term ownership, operations, and maintenance responsibilities.

22. Notes and Statements:

- a. A statement, signed by the landowner, acknowledging that the stormwater BMPs are fixtures that cannot be altered or removed without prior approval by the Municipality.
- b. A statement referencing the Operation and Maintenance (O&M) Agreement and stating that the O&M Agreement is part of the SWM Site Plan.
- c. A note indicating that Record Drawings will be provided for all stormwater facilities prior to occupancy, or the release of the surety bond.
- d. The following signature block for the registered professional preparing the Stormwater Management Plan:

"I, _____, hereby certify that the Stormwater Management Plan meets all design standards and criteria of the Robinson Township Stormwater Management Ordinance."

e. The following signature block for the Township:

Robinson Township on this date _____, has reviewed this Stormwater Management Plan in accordance with the Design Standards and Criteria of the Robinson Township Stormwater Management Ordinance."

B. SWM Site Report shall include (but not limited to):

1. General data including:
 - a. Project Name
 - b. Project location - address of the property site
 - c. Name, address, and telephone number of the Applicant/Owner of the property;
 - d. Name, address, telephone number, email address, and engineering seal of the individual preparing the SWM Site Report;
 - e. Date of submission and revisions.
2. Project description narrative that clearly discusses the project and provides the following information:
 - a. Narrative
 - Statement of the regulated activity describing what is being proposed. Overall stormwater management concept with description of permanent stormwater management techniques, including construction specifications and materials to be used for stormwater management facilities.

- Include descriptions of all assumptions, methods, references, and calculations for all stormwater drainage facilities.
- Expected project schedule
- Location map showing the project site and its location relative to release rate districts.
- Detailed description of the existing site conditions including a site evaluation completed for projects proposed in areas of carbonate geology or karst topography, and other environmentally sensitive areas such as brownfields.
- Total site area – pre and post, which must be equal or have an explanation as to why it is not
- Total site impervious area
- Total off-site areas
- Number and description of stormwater management facilities
- Type of development
- Pre-development land use
- Whether site is a Stormwater Hotspot
- Whether site is in a defined sensitive area
- Types of water quality and recharge systems used, if applicable
- Complete hydrologic, hydraulic, and structural computations for all stormwater management facilities.
- A written maintenance plan for all stormwater features including detention facilities and other stormwater management elements.
- Identification of ownership and maintenance responsibility for all permanent stormwater management facilities.
- Other pertinent information, as required

b. Summary Tables

- Existing conditions runoff volume & peak rate of runoff
- Post-development runoff volume & peak rate of runoff
- Land use for each subarea
- Hydrologic soil group (HSG) assumptions, curve numbers (CN)
- Time of concentration computed for each subarea
- Post-development peak rate of runoff routed to ponds and out
- Pond maximum return period design data including: maximum water surface elevation, berm elevation, and emergency spillway elevation
- Water quality depth and volume requirements

c. Calculations

- Complete hydrologic, hydraulic and structural computations, calculations, assumptions, and criteria for the design of all stormwater BMPs.
- Details of the berm embankment and outlet structure indicating the embankment top elevation, embankment side slopes, top width of embankment, emergency spillway elevation, perforated riser dimensions, pipe barrel dimensions and dimensions and spacing of antiseep collars.
- Design computations for the control structures (pipe barrel and riser, etc).
- A plot or table of the stage-storage (volume vs. elevation) and all supporting computations.
- Routing computations.

d. Drawings

- Drainage area maps for all watersheds and inlets depicting the time of concentration path for both existing conditions and post developed condition.
- All stormwater management facilities must be located on a plan and

described in detail including easements and buffers boundaries.

3. Reports that do not clearly indicate the above information may be rejected for review by the Township and will be returned to the applicant.
 4. Description of, justification, and actual field results for infiltration testing with respect to the type of test and test location for the design of infiltration BMPs.
 5. The effect of the project (in terms of runoff volumes, water quality, and peak flows) on surrounding properties and aquatic features and on any existing Township stormwater collection system that may receive runoff from the project site.
 6. Description of the proposed changes to the land surface and vegetative cover including the type and amount of impervious area to be added.
 7. Identification of short-term and long-term ownership, operation, and maintenance responsibilities as well as schedules and costs for inspection and maintenance activities for each permanent stormwater or drainage BMP, including provisions for permanent access or maintenance easements.
- C. Supplemental information to be provided prior to recording of the SWM Site Plan, as applicable:
1. Signed and executed Operations and Maintenance Agreement (Appendix A).
 2. Signed and executed easements, as required for all on-site and off-site work.
 3. An Erosion and Sedimentation Control Plan & approval letter from the Washington County Conservation District.
 4. A NPDES Permit.
 5. Permits from PADEP and ACOE.
 6. Geologic Assessment.
 7. Soils Investigation report, including boring logs, compaction requirements, and recommendations for construction of detention basins.
 8. A Highway Occupancy Permit from PENNDOT when utilization of a PENNDOT storm drainage system is proposed or when proposed facilities would encroach onto a PENNDOT right-of-way.

Section 803. SWM Site Plan & Report Submission

- A. The Applicant shall submit the SWM Site Plan & Report for the Regulated Activity.
- B. Five (5) copies of the SWM Site Plan & Report shall be submitted and be distributed as follows:
 1. Two (2) copies to Robinson Township accompanied by the requisite executed Review Fee Reimbursement Agreement, as specified in this Ordinance
 2. One (1) copy to the Township Engineer
 3. One (1) copy to the Washington County Planning Commission
 4. One (1) copy to the Washington County Conservation District
- C. Additional copies shall be submitted as requested by the Township or PADEP.

Section 804. SWM Site Plan & Report Review

- A. The Township shall require receipt of a complete SWM Site Plan & Report as specified in this Ordinance. The Municipality shall review the SWM Site Plan & Report for consistency with the

purposes, requirements, and intent of this Ordinance and any other applicable municipal requirement.

- B. The Township shall not approve any SWM Site Plan & Report that is deficient in meeting the requirements of this Ordinance. At its sole discretion and in accordance with this Article, when a SWM Site Plan & Report is found to be deficient, the Township may disapprove the submission and require a resubmission, or in the case of minor deficiencies, the Township may accept submission of modifications. All required permits from PADEP must be obtained prior to approval.
- C. The Township shall notify the Applicant in writing within forty-five (45) calendar days whether the SWM Site Plan & Report is approved or disapproved if the SWM Site Plan & Report is not part of a Subdivision or Land Development Plan. If the SWM Site Plan & Report involves a Subdivision or Land Development Plan, the timing shall follow the Subdivision and Land Development process according to the Municipalities Planning Code.
- D. The Township Building Permit Office shall not issue a building permit for any Regulated Activity if the SWM Site Plan & Report has been found to be inconsistent with this Ordinance, as determined by the Township. All required permits from PADEP must be obtained prior to issuance of a building permit.

Section 805. Modification of Plans

- A. A modification to a submitted SWM Site Plan & Report for a development site that involves a change in stormwater management facilities or techniques, or that involves the relocation or re-design of stormwater management facilities, or that is necessary because soil or other conditions are not as stated on the SWM Site Plan as determined by the Municipality, shall require a resubmission of the modified SWM Site Plan in accordance with this Ordinance.

Section 806. Resubmission of Disapproved SWM Site Plan & Report

- A. A disapproved SWM Site Plan & Report may be resubmitted with the revisions addressing the Township's concerns documented in writing, to the Township in accordance with this Ordinance. The applicable Township Review Fee must accompany a resubmission of a disapproved SWM Site Plan & Report.

Section 807. Authorization to Construct and Term of Validity

- A. The Township's approval of a SWM Site Plan & Report authorizes the Regulated Activities contained in the SWM Site Plan for a maximum term of validity of five (5) years following the date of approval. The Township may specify a term of validity shorter than five (5) years in the approval for any specific SWM Site Plan. Terms of validity shall commence on the date the Township signs the approval for a SWM Site Plan. If stormwater management facilities included in the approved SWM Site Plan have not been constructed, or if an Record Drawing of these facilities has not been approved within this time, then the Township may consider the SWM Site Plan disapproved and may revoke any and all permits or approvals.

Section 808. Record Drawings, Completion Certificate and Final Inspection

- A. The Applicant shall be responsible for providing Record Drawings of all stormwater BMPs included in the approved SWM Site Plan. The Record Drawing and an explanation of any discrepancies with the approved SWM Site Plan shall be submitted to the Township as a prerequisite for the release of the guarantee or issuance of an occupancy permit.

- B. The Record Drawing shall include a certification of completion signed by a Qualified Professional verifying that all permanent stormwater BMPs have been constructed according to the approved SWM Site Plan & Report.
1. Drawings shall show all approved revisions and elevations and inverts to all manholes, inlets, pipes, and stormwater control facilities.
- C. After receipt of the Record Drawing and certification of completion by the Township, the Township may conduct a final inspection.
- D. In no case shall the Township approve the As-Built Survey until the Township received a copy of an approved Declaration of Adequacy, Highway Occupancy permit from the PennDOT District Office, and any applicable permits from PADEP. The Township shall not issue any Occupancy Permits within a Development until the As-Built Survey is submitted and approved.
- E. The Township's approval of a Stormwater Management Plan and Report Package shall be valid for a period not to exceed one (1) year. This one year time period shall commence on the date that the Township signs the approved Stormwater Management Plan and Report Package. If stormwater management facilities included in the approved Stormwater Management Plan and Report package have not been constructed, or an As-Built Survey of these facilities has not been approved within one year time period, then the Township may consider the Stormwater Management Plan and Report Package disapproved and may revoke any and all permits (including Occupancy Permits for residential dwellings owned and occupied by someone other than the Developer). Stormwater Management Plan and Report packages that are considered disapproved by the Township shall be resubmitted in accordance with this Ordinance.

ARTICLE IX - EASEMENTS

Section 901. Easements

- A. Easements shall be established to accommodate the existence of drainageways.
- B. Where a tract is traversed by a watercourse, drainage-way, channel or stream, there shall be provided an easement paralleling the line of such watercourse, drainage-way, channel or stream with a width adequate to preserve the unimpeded flow of natural drainage in the 100-year floodplain.
- C. Easements shall be established for all on-site stormwater management or drainage facilities (except where the single family residential exemption applies), including but not limited to: detention facilities (above or below ground), infiltration facilities, all stormwater BMPs, drainage swales, and drainage facilities (inlets, manholes, pipes, etc.).
- D. Easements are required for all areas used for off-site stormwater control.
- E. All easements shall be a minimum of 20 feet wide and shall encompass the 100-year surface elevation of the proposed stormwater facility.
- F. Easements shall provide ingress to, and egress from, a public right-of-way. In lieu of providing an easement to the public right-of-way, a note may be added to the plan granting the Township or their designees access to all easements via the nearest public right-of-way able for vehicle ingress and egress on grades of less than 10% for carrying out inspection or maintenance activities.
- G. Where possible, easements shall be centered on side and/or rear lot lines.
- H. Nothing shall be planted or placed within the easement which would adversely affect the function of the easement, or conflict with any conditions associated with such easement.
- I. All easements shall be shown on the subdivision plan, as applicable. Applicable subdivision plans shall be recorded prior to any land development occurring.
- J. All easement agreements shall be recorded with a reference to the recorded easement indicated on the site plan. The format and content of the easement agreement shall be reviewed by the Township Engineer and Solicitor.
- K. Existing Waterbodies or Watercourses: Where a subdivision or land development is traversed by or contains a pond, lake, watercourse, drainage way, channel, storm drainage system, or stream, there shall be provided a drainage easement that conforms substantially with the line of such pond, lake, watercourse, drainage way, channel, storm drainage system, stream, of such width as will be adequate to preserve the unimpeded flow of drainage and to provide for widening, deepening, relocating, improving or protecting such features or drainage facilities. Minimum easement width shall be ten feet (10') from each side of the watercourse, waterbody, stream, pond or lake, but the Township may require a greater easement as may be determined by the Township.

ARTICLE X - MAINTENANCE RESPONSIBILITIES

Section 1001. Financial Guarantee

- A. The Applicant shall provide a Financial Guarantee to the Township for the timely installation and proper construction of all stormwater management controls as required by the approved SWM Site Plan and this Ordinance, equal to 110% of the full construction cost of the required controls in accordance with the Municipalities Planning Code. Financial guarantees as required by this Ordinance shall be provided in the form of:
 1. Bonds.
 2. Escrow Accounts, or
 3. Irrevocable Letters of Credit.
- B. At the completion of the project and as a prerequisite for the release of the Financial Guarantee, the Applicant shall:
 1. Provide a certification of completion from an engineer, architect, surveyor or other qualified person, verifying that all permanent facilities have been constructed according to the SWM Site Plan & Report and approved revisions thereto.
 2. Provide a set of Record Drawings.
 3. Request a final inspection from the Township to certify compliance with this Ordinance, after receipt of the certification of completion and Record Drawings by the Township.

Section 1002. Maintenance Responsibilities

- A. The SWM Site Plan & Report for the project site shall describe the future operation and maintenance responsibilities. The operation and maintenance description shall outline required routine maintenance actions and schedules necessary to ensure proper operation of the stormwater control facilities.
- B. The SWM Site Plan & Report for the project site shall establish responsibilities for the continuing operating and maintenance of all proposed stormwater control facilities, consistent with the following principals:
 1. If a development consists of structures or lots that are to be separately owned and in which streets, sewers, and other public improvements are to be dedicated to the Township, stormwater control facilities/BMPs may also be dedicated to and maintained by the Township that are located within the road right-of-way. All stormwater facilities located outside the road right-of-way must be owned and maintained by the Developer or private management entity, including all detention basins and infiltration BMP's.
 2. If a development site is to be maintained in a single ownership or if sewers and other public improvements are to be privately owned and maintained, then the ownership and maintenance of stormwater control facilities/BMPs shall be the responsibility of the owner or private management entity.
 3. Facilities, areas, or structures used as stormwater BMPs shall be enumerated as permanent real estate appurtenances and recorded as deed restrictions or easements that run with the land.

4. The SWM Site Plan & Report shall be recorded as a restrictive deed covenant that runs with the land.
 5. The Township may take enforcement actions against an Applicant for failure to satisfy any provision of this Ordinance.
- C. The Township, upon recommendation of the Township Engineer, shall make the final determination on the continuing maintenance responsibilities prior to final approval of the SWM Site Plan & Report. The Township may require a dedication of such facilities as part of the requirements for approval of the SWM Site Plan. Such a requirement is not an indication that the Township will accept the facilities. The Township reserves the right to accept or reject the ownership and operating responsibility for any portion of the stormwater management controls.
 - D. If the Township accepts ownership of stormwater BMPs, the Township may, at its discretion, require a fee from the Applicant to the Township to offset the future cost of inspections, operations, and maintenance.
 - E. It shall be unlawful to alter or remove any permanent stormwater BMP required by an approved SWM Site Plan, or to allow the property to remain in a condition, which does not conform to an approved SWM Site Plan, unless the Township grants an exception in writing.

Section 1003. Maintenance Agreement for Privately Owned Stormwater Facilities

- A. Prior to final approval of the SWM Site Plan & Report, the Applicant shall sign the Operation and Maintenance (O&M) Agreement (Appendix A) covering all stormwater control facilities that are to be privately owned. The Operation and Maintenance (O&M) Agreement shall be recorded with the SWM Site Plan and made a part hereof.
 1. The Township is exempt from the requirement to sign and record an Operation and Maintenance (O&M) Agreement.
- B. Other items may be included in the Operation and Maintenance (O&M) Agreement where determined necessary to guarantee the satisfactory operation and maintenance of all BMP facilities. The Operation and Maintenance (O&M) Agreement shall be subject to the review and approval of the Township and the Township Solicitor.
- C. The owner is responsible for operation and maintenance of the stormwater BMPs. If the owner fails to adhere to the Operation and Maintenance (O&M) Agreement, the Township may perform the services required and charge the owner appropriate fees. Non-payment of fees may result in a lien against the property.
- D. The agreement shall stipulate that:
 1. The owner shall maintain all facilities in accordance with the approved maintenance schedule and shall keep all facilities in a safe and attractive manner.
 2. The owner shall convey to the Township easement and/or right-of-way to assure access for periodic inspections by the Township and maintenance, if required.
 3. The owner shall keep on file with the Township the name, address and telephone number of the person or company responsible for maintenance activities; in the event of a change, new information will be submitted to the Township within ten (10) days of the change.

ARTICLE XI - INSPECTIONS

Section 1101. Schedule of Inspections

- A. PADEP or its designees normally ensure compliance with any permits issued, including those for stormwater management. In addition to PADEP compliance programs, the Township or their Township assignee may inspect all phases of the installation of temporary or permanent stormwater management facilities.
- B. During any stage of Earth Disturbance Activities, if the Municipality determines that the stormwater management facilities are not being installed in accordance with the approved SWM Site Plan, the Township shall revoke any permits or approvals until a revised SWM Site Plan is submitted and approved as specified in this Ordinance.
- C. Stormwater BMPs shall be inspected by the landowner, or the landowner's designee according to the inspection schedule described on the SWM Site Plan for each BMP.
 1. The Township may require copies of the inspection reports, in a form as stipulated by the Township.
 2. If such inspections are not conducted or inspection reports not submitted as scheduled, the Township, or their designee, may conduct such inspections and charge the owner appropriate fees. Non-payment of fees may result in a lien against the property.
 - a. Prior to conducting such inspections, the Township shall inform the owner of its intent to conduct such inspections. The owner shall be given thirty (30) days to conduct required inspections and submit the required inspection reports to the Township.

Section 1102. Right-of-Entry

- A. Upon presentation of proper credentials, duly authorized representatives of the Township may enter at reasonable times, upon any property within the Township, to inspect the implementation, condition, or operations and maintenance of the stormwater BMPs in regard to any aspect governed by this Ordinance.
- B. Stormwater BMP owners and operators shall allow persons working on behalf of the Township ready access to all parts of the premises for the purposes of determining compliance with this Ordinance.
- C. Persons working on behalf of the Municipality shall have the right to temporarily locate on any stormwater BMP in the Township such devices, as are necessary, to conduct monitoring and/or sampling of the discharges from such stormwater BMP.
- D. Unreasonable delay in allowing the Township access to a stormwater BMP is a violation of this Ordinance.

ARTICLE XII - ENFORCEMENT AND PENALTIES

Section 1201. Notification

- A. In the event that a person fails to comply with the requirements of this Ordinance, an approved SWM Site Plan, or fails to conform to the requirements of any permit or approval issued hereunder, the Township shall provide written notification of the violation. Such notification shall set forth the nature of the violation(s) and establish a time limit for correction of these violation(s).
- B. Failure to comply within the time specified shall subject such person to the Penalties Provisions of this Ordinance. All such penalties shall be deemed cumulative and shall not prevent the Township from pursuing any and all other remedies. It shall be the responsibility of the owner of the real property on which any Regulated Activity is proposed to occur, is occurring, or has occurred, to comply with the terms and conditions of this Ordinance.

Section 1202. Enforcement

- A. The Township's governing body is hereby authorized and directed to enforce all of the provisions of this Ordinance. The approved SWM Site Plan shall be on file at the project site throughout the duration of the construction activity. The Township or their designee may make periodic inspections during construction.
- B. Adherence to Approved SWM Site Plan
 1. It shall be unlawful for any person, firm, or corporation to undertake any Regulated Activity on any property except as provided for by an approved SWM Site Plan and pursuant to the requirements of this Ordinance.
 2. It shall be unlawful to alter or remove any control structure required by the SWM Site Plan pursuant to this Ordinance.
 3. It shall be unlawful to allow a property to remain in a condition that does not conform to an approved SWM Site Plan.

Section 1203. Public Nuisance

- A. A violation of any provision of this Ordinance is hereby deemed a Public Nuisance.
- B. Each day that a violation continues shall constitute a separate violation.

Section 1204. Suspension and Revocation

- A. Any approval or permit issued by the Township may be suspended or revoked for:
 1. Non-compliance with or failure to implement any provision of the approved SWM Site Plan or Operation & Maintenance (O&M) Agreement.
 2. A violation of any provision of this Ordinance or any other applicable law, Ordinance, rule or regulation relating to the Regulated Activity.

3. The creation of any condition or the commission of any act, during the Regulated Activity which constitutes or creates a hazard or nuisance, pollution, or which endangers the life or property of others.
- B. A suspended approval or permit may be reinstated by the Township when:
1. The Municipality or their designee has inspected and approved the corrections to the violation(s) that caused the suspension.
 2. The Municipality is satisfied that the violation(s) has been corrected.
- C. An approval that has been revoked by the Township cannot be reinstated. The Applicant may apply for a new approval under the provisions of this Ordinance.

Section 1205. Penalties

- A. Anyone violating the provisions of this Ordinance shall be guilty of a summary offense and upon conviction, shall be subject to a fine of not less than \$300.00 nor more than \$ 1,000.00 for each violation, recoverable with costs. Each day that the violation continues shall be a separate offense and penalties shall be cumulative.
- B. In addition, the Township, through its solicitor, may institute injunctive, mandamus, or any other appropriate action or proceeding at law or in equity for the enforcement of this Ordinance. Any court of competent jurisdiction shall have the right to issue restraining orders, temporary or permanent injunctions, mandamus, or other appropriate forms of remedy or relief.

Section 1206. Appeals

- A. Any person aggrieved by any action of the Township or its designee, relevant to the provisions of this Ordinance, may appeal to the Township within thirty (30) days of that action.
- B. Any person aggrieved by any decision of the Township, relevant to the provisions of this Ordinance, may appeal to the Washington County Court of Common Pleas within thirty (30) days of the Township's decision.

ARTICLE XIII - PROHIBITIONS

Section 1301. Prohibited Discharges and Connections

- A. Any drain or conveyance, whether on the surface or underground, that allows any non-stormwater discharge including sewage, process wastewater, and wash water to enter the Township's separate storm sewer system or Waters of the Commonwealth is prohibited.
- B. Any drain or conveyance connected from a commercial or industrial land use to the Township's separate storm sewer system, which has not been documented in plans, maps, or equivalent records, and approved by the Township is prohibited.
- C. No person shall allow, or cause to allow, discharges into the Township's separate storm sewer system or into surface Waters of the Commonwealth, which are not composed entirely of stormwater, except those in subsection 1301.D below, and discharges allowed under a state or federal permit.
- D. The following discharges are authorized unless they are determined to be significant contributors to pollution to the Waters of the Commonwealth:
 - Potable water sources including dechlorinated water line and fire hydrant flushings
 - Irrigation drainage
 - Air conditioning condensate
 - Springs
 - Water from crawl space pumps
 - Pavement wash waters where spills or leaks of toxic or hazardous materials have not occurred (unless all spill material has been removed) and where detergents are not used
 - Discharges from fire fighting activities
 - Flows from riparian habitats and wetlands
 - Uncontaminated water from foundations or from footing drains
 - Lawn watering
 - Dechlorinated swimming pool discharges
 - Uncontaminated groundwater
 - Water from individual residential car washing
 - Routine external building washdown (which does not use detergents or other compounds)
- E. In the event that the Township or PADEP determines that any of the discharges identified in subsection 1301.D is a significant contributor to pollution to the Waters of the Commonwealth, the responsible person(s) shall be notified to cease the discharge. Upon notice provided by the Township or PADEP, the discharger will have a reasonable time, as determined by the Township or PADEP, to cease the discharge, consistent with the degree of pollution caused by the discharge.
- F. Nothing in this Section shall affect a discharger's responsibilities under Commonwealth Law.

Section 1302. Roof Drains

- A. Roof drains and sump pumps shall discharge to infiltration areas, vegetative BMPs, or pervious areas to the maximum extent practicable.

Section 1303. Alteration of BMPs

- A. No person shall modify, remove, fill, landscape, or alter any existing stormwater BMP, facilities, areas, or structures unless it is part of an approved maintenance program, without the written approval of the Township.
- B. No person shall place any structure, fill, landscaping, or vegetation into a stormwater BMP, facilities, areas, structures, or within a drainage easement which would limit or alter the functioning of the BMP without the written approval of the Township.

ARTICLE XIV - FEES AND EXPENSES

Section 1401. General

- A. The fee required by this Ordinance are the Township Application Fee and Township Inspection and Review Fee. The Township Fees shall be established by the Township to defray review costs incurred by the Township and the Township Engineer. The Applicant shall pay all fees.
- B. The Township shall establish an Application, Inspection and Review Fee Schedule based upon the size of the Regulated Activity and based on the Township's costs for reviewing the Drainage Plan. The Township shall periodically update the Application, Inspection and Review Fee Schedule to ensure that review costs are adequately reimbursed.

Section 1402. Expenses Covered by Fees

- A. The fees required by this Ordinance shall, at a minimum, cover:
 1. Administrative and Clerical Costs.
 2. Review of the SWM Site Plan & Report.
 3. Pre-construction meetings and site visits.
 4. Field reviews of stormwater management facilities/BMPs and drainage improvements during construction.
 5. Final filed reviews upon completion of the stormwater management facilities/BMPs and drainage improvements presented in the SWM Site Plan.
 6. Any additional work required to enforce any permit provisions regulated by this Ordinance, correct violations, and assure proper completion of stipulated remedial actions.

Section 1403. Recording of Approved SWM Site Plan and Related Agreements

- A. The owner of any land upon which permanent BMPs will be placed, constructed, or implemented, as described in the SWM Site Plan, shall record the following documents in the Office of the Recorder of Deeds of Washington County, within () days of approval of the SWM Site Plan by the Township:
 1. The SWM Site Plan.
 2. Operations and Maintenance (O&M) Agreement (Appendix A).
 3. Easements under Section 901.
 4. Riparian buffers under Section 602.
- B. The Township may suspend or revoke any approvals granted for the project site upon discovery of the failure of the owner to comply with this Section.

Section 1404. Municipal Stormwater Maintenance Fund

- A. Persons installing stormwater storage facilities shall be required to pay a specified amount to the Municipal Stormwater Maintenance Fund to help defray costs of periodic inspections and maintenance expenses. The amount of the deposit shall be determined as follows:
 1. If the storage facility is to be privately owned and maintained, the deposit shall cover the cost of the periodic inspections and maintenance performed by the Township for a period of twenty (20) years, as estimated by the Township Engineer and approved by the Township. After that period of time, inspections will be performed at the expense of the

person on record with the Township as being responsible for the ownership and maintenance.

2. If the storage facility is to be owned and maintained by the Township, the deposit shall cover the estimated costs for maintenance and inspections for a period of twenty (20) years. The Township Engineer will establish the estimated costs to be approved by the Township utilizing information submitted by the Developer.
 3. The amount of the deposit to the fund shall be converted to present worth of the annual series values. The Township Engineer shall determine the present worth equivalents which shall be subject to the approval of the Township.
- B. If a storage facility is proposed that also serves as a recreation facility (e.g. ballfield, lake), the Township may reduce or waive the amount of the maintenance fund based upon the value of the land for public recreation purposes, unless the recreation facilities were required to address another Township Ordinance.
- C. If at some future time a storage facility (whether publicly or privately owned) is eliminated due to the installation of storm sewers or other storage facility, the unused portion of the maintenance fund deposit will be applied to the cost of abandoning the facility and connecting to the storm sewer or other facility. Any amount of the deposit remaining after the costs of abandonment are paid will be turned over to the last entity responsible for the ownership and maintenance of the facility.

STORMWATER MANAGEMENT ORDINANCE

01-11

ENACTED and ORDAINED at a regular meeting of the
Robinson Township Board of Supervisors

on this 9 day of May, 20 11

This Ordinance shall take effect immediately.

<u>[Signature]</u> (Name)	<u>Chairman</u> (Title)
<u>[Signature]</u> (Name)	<u>Vice Chairman</u> (Title)
<u> </u> (Name)	<u> </u> (Title)

ATTEST:

[Signature]
Secretary

I hereby certify that the foregoing Ordinance was advertised in the Observer-Reporter on 4/23/11 a newspaper of general circulation in the Township and was duly enacted and approved as set forth at a regular meeting of the Robinson Township Board of Supervisors held on 5/9/11.

[Signature]
Secretary

APPENDIX A - OPERATION AND MAINTENANCE AGREEMENT

OPERATION AND MAINTENANCE (O&M) AGREEMENT
STORMWATER MANAGEMENT BEST MANAGEMENT PRACTICES (SWM BMPs)

THIS AGREEMENT, made and entered into this _____ day of _____, 20____, by and between _____ (hereinafter the "Landowner"), and _____, Washington County, Pennsylvania, (hereinafter "Municipality");

WITNESSETH

WHEREAS, the Landowner is the owner of certain real property as recorded by deed in the land records of Washington County, Pennsylvania, Deed Book _____ at Page _____, (hereinafter "Property").

WHEREAS, the Landowner is proceeding to build and develop the Property; and

WHEREAS, the SWM Site Plan approved by the Municipality (hereinafter referred to as the "Plan") for the property identified herein, which is attached hereto as Appendix A and made part hereof, as approved by the Municipality, provides for management of stormwater within the confines of the Property through the use of BMPs; and

WHEREAS, the Municipality, and the Landowner, his successors and assigns, agree that the health, safety, and welfare of the residents of the Municipality and the protection and maintenance of water quality require that on-site SWM BMPs be constructed and maintained on the Property; and

WHEREAS, the Municipality requires, through the implementation of the SWM Site Plan, that stormwater BMPs as required by said Plan and the Municipal Stormwater Management Ordinance be constructed and adequately operated and maintained by the Landowner, successors and assigns.

NOW, THEREFORE, in consideration of the foregoing promises, the mutual covenants contained herein, and the following terms and conditions, the parties hereto agree as follows:

1. The Landowner shall construct the BMPs in accordance with the plans and specifications identified in the SWM Site Plan.
2. The Landowner shall operate and maintain the BMPs as shown on the Plan in good working order in accordance with the specific maintenance requirements noted on the approved SWM Site Plan.
3. The Landowner hereby grants permission to the Municipality, its authorized agents, and employees, to enter upon the property, at reasonable times and upon presentation of proper credentials, to inspect the BMPs whenever necessary. Whenever possible, the Municipality shall notify the Landowner prior to entering the property.
4. In the event the Landowner fails to operate and maintain the BMPs per paragraph 2, the Municipality or its representatives may enter upon the Property and take whatever action is deemed necessary to maintain said BMPs. It is expressly understood and agreed that the Municipality is under no obligation to maintain or repair said facilities, and in no event shall this Agreement be construed to impose any such obligation on the Municipality.
5. In the event the Municipality, pursuant to this Agreement, performs work of any nature, or expends any funds in performance of said work for labor, use of equipment, supplies, materials, and the like, the Landowner shall reimburse the Municipality for all expenses (direct and indirect) incurred within thirty (30) days of receipt of invoice from the Municipality. All expended funds must be justified to be audited.
6. The intent and purpose of this Agreement is to ensure the proper maintenance of the onsite BMPs by the Landowner; provided, however, that this Agreement shall not be deemed to create or affect any additional liability of any party for damage alleged to result from or be caused by stormwater runoff.

7. The Landowner, its executors, administrators, assigns, and other successors in interests, shall release the Municipality from all damages, accidents, casualties, occurrences or claims which might arise or be asserted against said employees and representatives from the construction, presence, existence, or maintenance of the BMPs by the Landowner or Municipality.
8. The Municipality may inspect the BMPs at a minimum of once every three years to ensure their continued functioning.

This Agreement shall be recorded at the Office of the Recorder of Deeds of Washington County, Pennsylvania, and shall constitute a covenant running with the Property and/or equitable servitude, and shall be binding on the Landowner, his administrators, executors, assigns, heirs and any other successors in interests, in perpetuity.

ATTEST:

WITNESS the following signatures and seals:

(SEAL)

For the Municipality:

For the Landowner:

ATTEST:

_____[City, Borough, Township]

County of Washington, Pennsylvania

I, _____, a Notary Public in and for the County and State aforesaid, whose commission expires on the _____ day of _____, 20____, do hereby certify that _____ whose name(s) is/are signed to the foregoing Agreement bearing date of the _____ day of _____, 20____, has acknowledged the same before me in my said County and State.

GIVEN UNDER MY HAND THIS _____ day of _____, 20____.

NOTARY PUBLIC

(SEAL)

APPENDIX B – LOW IMPACT DEVELOPMENT PRACTICES

LOW IMPACT DEVELOPMENT PRACTICES ALTERNATIVE APPROACHES FOR MANAGING STORMWATER RUNOFF

Natural hydrologic conditions may be altered radically by poorly planned development practices, such as introducing unneeded impervious surfaces, destroying existing drainage swales, constructing unnecessary storm sewers, and changing local topography. A traditional drainage approach of development has been to remove runoff from a site as quickly as possible and capture it in a detention basin. This approach leads ultimately to the degradation of water quality, as well as expenditure of additional resources for detaining and managing concentrated runoff at some downstream location.

The recommended alternative approach is to promote practices that will minimize post-development runoff rates and volumes, which will minimize needs for artificial conveyance and storage facilities. To simulate pre-development hydrologic conditions, forced infiltration is often necessary to offset the loss of infiltration by creation of impervious surfaces. The ability of the ground to infiltrate runoff depends upon the soil types and its conditions.

Preserving natural hydrologic conditions requires careful alternative site design considerations. Site design practices include preserving natural drainage features, minimizing impervious surface area, reducing the hydraulic connectivity of impervious surfaces, and protecting natural depression storage. A well-designed site will contain a mix of all those features. The following describes various techniques to achieve the alternative approaches:

- † **Preserving Natural Drainage Features.** Protecting natural drainage features, particularly vegetated drainage swales and channels, is desirable because of their ability to infiltrate and attenuate flows and to filter pollutants. However, this objective is often not accomplished in land development. In fact, commonly held drainage philosophy encourages just the opposite pattern - streets and adjacent storm sewers typically are located in the natural headwater valleys and swales, thereby replacing natural drainage functions with a completely impervious system. As a result, runoff and pollutants generated from impervious surfaces flow directly into storm sewers with no opportunity for attenuation, infiltration, or filtration. Developments designed to fit site topography also minimize the amount of grading on site.
- † **Protecting Natural Depression Storage Areas.** Depressional storage areas have no surface outlet, or drain very slowly following a storm event. They can be commonly seen as ponded areas in farm fields during the wet season or after large runoff events. Traditional development practices eliminate these depressions by filling or draining, thereby obliterating their ability to reduce surface runoff volumes and trap pollutants. The volume and release-rate characteristics of depressions should be protected in the design of the development site. The depressions can be protected by simply avoiding the depression or by incorporating its storage as additional capacity in required detention facilities.
- † **Avoiding Introduction of Impervious Areas.** Careful site planning should consider reducing impervious coverage to the maximum extent possible. Building footprints, sidewalks, driveways, and other features producing impervious surfaces should be evaluated to minimize impacts on runoff.
- † **Reducing the Hydraulic Connectivity of Impervious Surfaces.** Impervious surfaces are significantly less of a problem if they are not directly connected to an impervious conveyance system (such as storm sewer). Two basic ways to reduce hydraulic connectivity are: routing of roof runoff over lawns; and reducing the use of storm sewers.

Site grading should promote increasing travel time of stormwater runoff and should help reduce concentration of runoff to a single point in the development.

- ♦ **Routing Roof Runoff Over Lawns.** Roof runoff can be easily routed over lawns in most site designs. The practice discourages direct connections of downspouts to storm sewers or parking lots. The practice also discourages sloping driveways and parking lots to the street. The routing of roof drains and crowning the driveway to allow runoff to discharge to pervious areas is desirable as the pervious area essentially acts as a filter strip.
- ♦ **Reducing the Use of Storm Sewers.** By reducing the use of storm sewers for draining streets, parking lots, and back yards, the potential for accelerating runoff from the development can be greatly reduced. The practice requires greater use of swales and may not be practical for some development sites, especially if there are concerns for areas that do not drain in a "reasonable" time. The practice requires educating local citizens and public works officials, who expect runoff to disappear shortly after a rainfall event.
- ♦ **Reducing Street Widths.** Street widths can be reduced by either eliminating on-street parking or by reducing carway widths. Municipal planners and traffic designers should encourage narrower neighborhood streets, which ultimately could lower maintenance and maintenance related costs.
- ♦ **Limiting Sidewalks to One Side of the Street.** A sidewalk on one side of the street may suffice in low-traffic neighborhoods. The lost sidewalk could be replaced with bicycle/recreational trails that follow back-of-lot lines. Where appropriate, backyard trails should be constructed using pervious materials.
- ♦ **Using Permeable Paving Materials.** These materials include permeable interlocking concrete paving blocks or porous bituminous concrete. Such materials should be considered as alternatives to conventional pavement surfaces, especially for low use surfaces such as driveways, overflow parking lots, and emergency access roads.
- ♦ **Reducing Building Setbacks.** Reducing building setbacks reduces driveway and entry walks and is most readily accomplished along low-traffic streets where traffic noise is not a problem.
- ♦ **Constructing Cluster Developments.** Cluster developments can also reduce the amount of impervious area for a given number of lots. The biggest savings is in street length, which also will reduce costs of the development. Cluster development "clusters" the construction activity onto less-sensitive areas without substantially affecting the gross density of development.

In summary, careful consideration of the existing topography and implementation of a combination of the above mentioned techniques may avoid construction of costly stormwater control measures. Other benefits include: reduced potential of downstream flooding, reduced water quality degradation of receiving streams and water bodies, enhancement of aesthetics, and reduction of development costs. Beneficial results include: more stable baseflows in receiving streams, improved groundwater recharge, reduced flood flows, reduced pollutant loads, and reduced costs for conveyance and storage.

APPENDIX C - STORMWATER MANAGEMENT DESIGN CRITERIA

TABLE C-1 - RATIONAL METHOD RUNOFF COEFFICIENTS

Hydraulic Soil Group	Slope Range	Storm	A			B			C			D		
			0-2%	2-6%	+6%	0-2%	2-6%	+6%	0-2%	2-6%	+6%	0-2%	2-6%	+6%
Cultivated	<25yr		0.08	0.13	0.16	0.11	0.15	0.21	0.14	0.19	0.26	0.18	0.23	0.31
Land	≥25yr		0.14	0.08	0.22	0.16	0.21	0.28	0.2	0.25	0.34	0.24	0.29	0.41
Pasture	<25yr		0.12	0.2	0.3	0.18	0.28	0.37	0.24	0.34	0.44	0.3	0.4	0.5
	≥25yr		0.15	0.25	0.37	0.23	0.34	0.45	0.3	0.42	0.52	0.37	0.5	0.62
Meadow	<25yr		0.10	0.16	0.25	0.14	0.22	0.3	0.2	0.28	0.36	0.24	0.3	0.4
	≥25yr		0.14	0.22	0.3	0.2	0.28	0.37	0.26	0.35	0.44	0.3	0.4	0.5
Forest	<25yr		0.05	0.08	0.11	0.08	0.11	0.14	0.1	0.13	0.16	0.12	0.16	0.2
	≥25yr		0.08	0.11	0.14	0.1	0.14	0.18	0.12	0.16	0.2	0.15	0.2	0.25
Residential														
1/8 Acre	<25yr		0.25	0.28	0.31	0.27	0.3	0.35	0.3	0.33	0.38	0.33	0.36	0.42
	≥25yr		0.33	0.37	0.4	0.35	0.39	0.44	0.38	0.42	0.49	0.41	0.45	0.54
1/4 Acre	<25yr		0.22	0.26	0.29	0.24	0.29	0.33	0.27	0.31	0.36	0.3	0.34	0.4
	≥25yr		0.3	0.34	0.37	0.33	0.37	0.42	0.36	0.4	0.47	0.38	0.42	0.52
1/3 Acre	<25yr		0.19	0.23	0.26	0.22	0.26	0.3	0.25	0.29	0.34	0.28	0.32	0.39
	≥25yr		0.28	0.32	0.35	0.3	0.35	0.39	0.33	0.38	0.45	0.36	0.4	0.5
1/2 Acre	<25yr		0.16	0.2	0.24	0.19	0.23	0.28	0.22	0.27	0.32	0.26	0.3	0.37
	≥25yr		0.25	0.29	0.32	0.28	0.32	0.36	0.31	0.35	0.42	0.34	0.38	0.48
1 Acre	<25yr		0.14	0.19	0.22	0.17	0.21	0.26	0.2	0.25	0.31	0.24	0.29	0.35
	≥25yr		0.22	0.26	0.29	0.24	0.28	0.34	0.28	0.32	0.4	0.31	0.35	0.46
Industrial	<25yr		0.67	0.68	0.68	0.68	0.68	0.69	0.68	0.69	0.69	0.69	0.69	0.7
	≥25yr		0.85	0.85	0.86	0.85	0.86	0.86	0.86	0.86	0.87	0.86	0.86	0.88
Commercial	<25yr		0.71	0.71	0.72	0.71	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72
	≥25yr		0.88	0.88	0.89	0.89	0.89	0.89	0.89	0.89	0.9	0.89	0.89	0.9
Streets	<25yr		0.7	0.71	0.72	0.71	0.72	0.74	0.72	0.73	0.76	0.73	0.75	0.78
	≥25yr		0.76	0.77	0.79	0.8	0.82	0.84	0.84	0.85	0.89	0.89	0.91	0.95
Open Space	<25yr		0.05	0.1	0.14	0.08	0.13	0.19	0.12	0.17	0.24	0.16	0.21	0.28
	≥25yr		0.11	0.16	0.2	0.14	0.19	0.26	0.18	0.23	0.32	0.22	0.27	0.39
Parking or	<25yr		0.85	0.86	0.87	0.85	0.86	0.87	0.85	0.86	0.87	0.85	0.86	0.87
Impervious	≥25yr		0.95	0.96	0.97	0.95	0.96	0.97	0.95	0.96	0.97	0.95	0.96	0.97

Source: Rawls, W.J., S.L. Long, and R.H. McCuen, 1981. *Comparison of Urban Flood Frequency Procedures*. Preliminary Draft Report prepared for the Soil Conservation Service, Beltsville, Maryland.

For simplification, a designer may use 0.3 for all pervious areas and 0.95 for all impervious areas.

TABLE C-2 - RUNOFF CURVE NUMBERS (FROM NRCS (SCS) TR-55)

Runoff Curve Numbers for Urban Areas					
Cover Description		Curve Numbers for Hydrologic Soil Groups			
Cover Type and Hydrologic Condition	Average Percent Impervious Area	A	B	C	D
<i>Fully Developed Urban Areas (Vegetation Established)</i>					
Open Space (lawns, parks, golf courses, etc):					
Poor Condition (grass cover < 50%)		68	79	86	89
Fair Condition (grass cover 50% to 75%)		49	69	79	84
Good Condition (grass cover > 75%)		39	61	74	80
<i>Impervious Areas:</i>					
Paved Parking Lots, Roofs, Driveways, etc.		98	98	98	98
<i>Streets and Roads:</i>					
Paved: Curbed and Storm Sewers		98	98	98	98
Paved: Open Ditches		83	89	92	93
Gravel		76	85	89	91
Dirt		72	82	87	89
<i>Urban Districts:</i>					
Commercial and Business	85%	89	92	94	95
Industrial	72%	81	88	91	93
<i>Residential Districts by Average Lot Size:</i>					
1/8 Acres or less	65%	77	85	90	92
1/4 Acre	38%	61	75	83	87
1/3 Acre	30%	57	72	81	86
1/2 Acre	25%	54	70	80	85
1 Acre	20%	51	68	79	84
2 Acres	12%	46	65	77	82

Runoff Curve Numbers for Cultivated Agricultural Lands						
Cover Description			Curve Numbers			
Cover Type	Treatment	Hydrologic Condition	A	B	C	D
Fallow	Bare Soil	—	77	86	91	94
	Crop Residue Cover (CR)	Poor	76	85	90	93
		Good	74	83	88	90
Row Crops	Straight Row (SR)	Poor	72	81	88	91
		Good	67	78	85	89
	SR + CR	Poor	71	80	87	90
		Good	64	75	82	85
	Contoured (C)	Poor	70	79	84	88
		Good	65	75	82	86
	C + CR	Poor	69	78	83	87
		Good	64	74	81	85
	Contoured & Terraced (C & T)	Poor	66	74	80	82
		Good	62	71	78	81
	C & T + CR	Poor	65	73	79	81
		Good	61	70	77	80
Small Grain	SR	Poor	65	76	84	88
		Good	63	75	83	87
	SR + CR	Poor	64	75	83	86
		Good	60	72	80	84
	C	Poor	63	74	82	85
		Good	61	73	81	84
	C + CR	Poor	62	73	81	84
		Good	60	72	80	83
	C & T	Poor	61	72	79	82
		Good	59	70	78	81
	C & T + CR	Poor	60	71	78	81
		Good	58	69	77	80
Close Seeded or Broadcast Legumes Or Rotation Meadow	SR	Poor	66	77	85	89
		Good	58	72	81	85
	C	Poor	64	75	83	85
		Good	55	69	78	83
	C & T	Poor	63	73	80	83
		Good	51	67	76	80
Runoff Curve Numbers for Other Agricultural Lands						
Pasture, Grassland, or Range – Continuous Forage for Grazing		Poor	68	79	86	89
		Fair	49	69	79	84
		Good	39	61	74	80
Meadow – Continuous Grass, Protected from Grazing and Generally Mowed for Hay		—	30	58	71	78
Woods – Grass Combination (orchard or tree farm)		Poor	57	73	82	86
		Fair	43	65	76	82
		Good	32	58	72	79
Woods		Poor	45	66	77	83
		Fair	36	60	73	79
		Good	30	55	70	77

Farmsteads - Buildings, Lanes, Driveways and Surrounding Lots.	-	59	74	82	86
--	---	----	----	----	----

APPENDIX D – REVIEW FEE REIMBURSEMENT AGREEMENT

THIS AGREEMENT MUST BE COMPLETED AND SIGNED BY THE DEVELOPER/APPPLICANT PRIOR TO SUBMISSION OF THE SUBDIVISION/LAND DEVELOPMENT APPLICATION AND PLANS, SKETCH PLANS, CONDITIONAL USE APPLICATIONS OR ANY OTHER SUBMISSION WHICH REQUIRES MUNICIPAL CONSULTANT REVIEW.

REVIEW FEE REIMBURSEMENT AGREEMENT

THIS AGREEMENT, made and entered into this _____ day of _____, 20____, by and between _____ (hereinafter the "Landowner"), and _____, Washington County, Pennsylvania, (hereinafter "Municipality");

WITNESSETH

WHEREAS, the Landowner is the owner of certain real property as recorded by deed in the land records of Washington County, Pennsylvania, Deed Book _____ at Page _____, (hereinafter "Property").

WHEREAS, the Landowner is proceeding to build and develop the Property; and

WHEREAS, the Landowner has submitted a SWM Site Plan for review and approval by the Municipality (hereinafter referred to as the "Plan") for the property identified herein; and

WHEREAS, the Developer has requested and/or required the Municipality approval and/or review of its proposed plans, and the Municipality is willing to authorize its professional consultants to review said Plan and/or proposal upon execution of this agreement, and upon deposit of an escrow account according to the current Fee Schedule.

NOW, THEREFORE, in consideration of the foregoing promises, the mutual covenants contained herein, and the following terms and conditions, the parties hereto agree as follows:

1. The Landowner and Municipality hereby authorize and direct the Municipality's professional consultants, as defined at Section 107 of the Pennsylvania Municipalities Planning Code to review Landowner's plans or proposals to use its property, and to make such recommendations and specifications as may be necessary with respect to such plans in accordance with all applicable Municipality ordinances, and State and Federal rules and regulations.
2. The Landowner and Municipality acknowledge that the Municipality will incur costs and fees relating to the review of Landowner's plans by its professional consultants, and Landowner agrees to pay and/or reimburse the Municipality for such costs in accordance with this agreement.

3. The Landowner shall pay the professional consultant's charges and fees for the following: (a) review of any and all Stormwater Management Plans, studies, or other correspondence relating to the Landowner's submission; (b) attendance at any and all meetings relating to Landowner's plan; (c) preparation of any reports, legal documents, or other correspondence relating to Landowner's plan or proposal; and (d) administrative cost and incurred expenses relating to the administration of this agreement. It is understood by the execution of this agreement that the Landowner specifically accepts the Fee Schedule currently in effect in the Municipality.
4. The Landowner hereby agrees to deposit with the Municipality the sum of _____ Dollars (\$_____), payable as cash in U.S. Dollars or check drawn on a Pennsylvania bank, as security for the payment of all costs and expenses, charges and fees as set forth in Paragraph 3 above, upon execution of this agreement, which shall be held in a noninterest-bearing account by the Municipality. In the event that the above deposited escrow fund shall fall below fifty percent (50%) of the original deposit, the Landowner shall immediately, upon receipt of written notice from the Municipality or its agent(s), deposit sums with the Municipality necessary to replenish the account to its original balance. In the event that this is insufficient to pay current Municipality incurred expenses, Landowner agrees to pay the total amount currently due for Municipality incurred expenses without delay in addition to re-establishing the base escrow account balance. The Municipality will use its best efforts to advise the Landowner of the impending likelihood that its costs have exceeded the required escrow account sums as described above.
5. Landowner and Municipality agree that upon completion of the Municipality's review of Landowner's plan or proposal, all unused portions of the escrow account as described above shall be returned to the applicant upon written request to the Municipality.
6. Landowner and Municipality acknowledge that the Ordinance and appropriate fee schedules require Landowner to pay Municipality's professional consultant fees relating to this plan or project, and in the event that Landowner fails to provide sufficient funds in the above-described revolving escrow account upon fifteen (15) days written notice to the Landowner or make the initial deposit payment described above within five (5) days of the date of this agreement, Landowner shall be in default of this agreement and in violation of the above Sections of Ordinance. In the event of Landowner's default as described above, the Municipality may refuse to issue any permit or grant any approval necessary to further improve or develop the subject site until such time as the terms of this Agreement are strictly met by Landowner. Moreover, final approval or further review may be denied or delayed until such time as the terms of this agreement are strictly met by Landowner.
7. Landowner and the Municipality further agree that all fees or costs arising out of this Agreement shall be paid prior to the issuance of any permit, occupancy or otherwise, for the use, improvement or construction of the buildings as proposed on the Landowner's plan. The Landowner agrees and acknowledges that no permit, occupancy or otherwise, or recordable plans, shall be released by the Municipality until all outstanding professional consultant fees and costs are paid to the Municipality, and provided that the Landowner is not in default under this agreement.
8. The Landowner may at any time terminate all further obligations under this Agreement by giving fifteen (15) days written notice to the Municipality that it does not desire to proceed with the development as set forth on the plan and upon receipt of such written notice by the Landowner to the Municipality, the Landowner shall be liable to the Municipality for its costs and expenses incurred to the date and time of its receipt of the notice, plus the applicable administrative costs and expenses as outlined in Paragraph 3 above.
9. The Landowner and the Municipality further agree that the Municipality shall have the right and privilege to sue the Landowner or then property owner in assumpsit for reimbursement or to lien the property or both, in its sole discretion, for any expense in excess of the then current balance

of funds on deposit with the Municipality in accordance with this agreement incurred by the Municipality by reason of any review, supervision and inspection of Landowner's project by its professionals including, but not limited to, the Municipality Engineer and Solicitor. The Municipality's election of its remedies under this paragraph shall not constitute a waiver of any other remedies the Municipality may have.

10. The Landowner and the Municipality acknowledge that this agreement represents their full understanding as to the Municipality's reimbursement for professional or consultant services.

11. This agreement shall be binding on and insure to the benefit of the successors and assigns of Landowner. The Municipality shall receive thirty (30) days advance written notice from Landowner of any proposed assignment of Landowner's rights and responsibilities under this Agreement.

ATTEST:

WITNESS the following signatures and seals:

(SEAL)

For the Municipality:

For the Landowner:

ATTEST:

_____(City, Borough, Township)

County of Washington, Pennsylvania

I, _____, a Notary Public in and for the County and State aforesaid,
whose commission expires on the _____ day of _____, 20____, do hereby certify that


_____ whose name(s) is/are signed to the foregoing Agreement
bearing date of the _____ day of _____, 20____, has acknowledged the same
before me in my said County and State.

GIVEN UNDER MY HAND THIS _____ day of _____, 20____.

NOTARY PUBLIC

(SEAL)

APPENDIX E – SMALL PROJECTS SWM APPLICATION

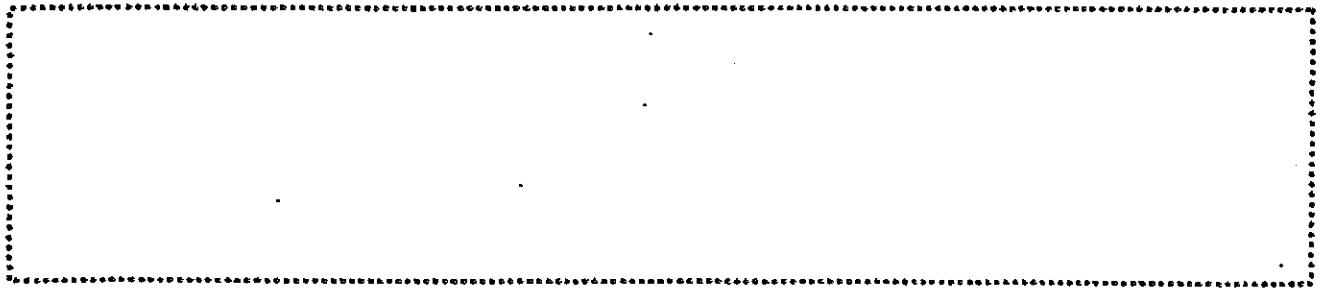

Washington County Small Project SWM Application

Per Robinson Township's Act 167 Stormwater Management Ordinance, a stormwater management plan is required whenever more than 2,500 square feet of impervious surface is proposed. Impervious surfaces are areas that prevent the infiltration of water into the ground and shall include, but not be limited to, roofs, patios, garages, storage sheds and similar structures, and any new streets or sidewalks.

To Calculate Impervious Surfaces Please Complete This Table					
Surface Type	Length	X	Width	=	Proposed Impervious Area
Building (leading to a downspout)		X		=	
		X		=	
		X		=	
		X		=	
Driveway		X		=	
		X		=	
		X		=	
Parking Areas		X		=	
		X		=	
		X		=	
Patios/Walks		X		=	
		X		=	
		X		=	
		X		=	
Other		X		=	
		X		=	
		X		=	
Total Impervious Surface Area to be managed (sum of all areas)					

If the Total Impervious Surface Area is LESS THAN 5,000 Square Feet, read, acknowledge and sign below.

If the Total Impervious Surface Area EXCEEDS 5,000 Square Feet, a SWMA Site Plan is required to be submitted.

ACKNOWLEDGMENT

Based Upon the information you have provided a *SWMA Site Plan* IS **NOT** required for this regulated activity.

Property Owner Acknowledges that submission of inaccurate information may result in a stop work order or permit revocation. Acknowledgement of such is by signature below. I declare that I am the owner or owner's legal representative. I further acknowledge that the information provided is accurate and employees and consultants of Robinson Township are granted access to the above described property for review and inspection as may be required.

Owner

Date:

CREDITS

Credit 1: DISCONNECTION OF IMPERVIOUS AREA

When runoff from impervious areas is directed to a pervious area that allows for infiltration, filtration, and increased time of concentration, all or parts of the impervious areas may qualify as Disconnected Impervious Area (DIA). Using the criteria below, determine the portion of the impervious area that can be excluded from the calculation of total impervious area.

Criteria: An impervious area is considered to be completely or partially disconnected if it meets the requirements listed below

- rooftop area draining to a downspout is ≤500 sf
- paved area draining to a discharge is ≤1,000 sf
- flow path of paved impervious area is not more than 75'
- soil at discharge is not designated as hydrologic soil group "D"
- flow path at discharge area has a positive slope of ≤5%
- gravel strip or other spreading device is required at paved discharges.

Length of Pervious Flow Path from discharge point * (ft)	DIA Credit Factor
0 – 14	1.0
15 – 29	0.8
30 – 44	0.6
45 – 59	0.4
60 – 74	0.2
75 or more	0

* Flow path cannot include impervious surfaces and must be at least 15 feet from any impervious surfaces.

Calculate DIA Credit & Required Capture Volume								
Surface Type	Proposed Impervious Area (from previous sheet)	X	DIA Credit Factor	=	Impervious Area to be managed	÷		= Required Capture Volume (ft³)
Building (area per downspout)		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
Driveway		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
Parking Areas		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
Patios/Walks		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=
Other		X		=		÷	6	=
		X		=		÷	6	=
		X		=		÷	6	=

Total Req'd Capture Volume

Credit 2: TREE PLANTING

Perhaps the best BMP is a tree as they intercept rainfall, increase evapotranspiration and increase time of concentration. A portion of the required capture volume can be reduced provided the criteria are met.

CREDITS

Deciduous Trees	Evergreen Trees
6 ft ³ per tree planted	10 ft ³ per tree planted

Criteria

To receive credit for planting trees, the following must be met:

- Trees must be native species (see below), minimum 2" caliper and 6 feet tall (min).
- Trees shall be adequately protected during construction.
- Trees shall be maintained until redevelopment occurs.
- No more than 25% of the runoff volume can be mitigated through the use of trees.
- Dead trees shall be replaced within 6 months.
- Non-native species are not applicable.

<input type="text"/>	Req'd Capture Volume (ft ³)
- <input type="text"/>	Tree Planting Credit (ft ³)
<input type="text"/>	Capture Volume to be managed (ft ³)

Sizing of BMP

<input type="text"/>	How much of the Volume will you manage with a Rain Garden?
+ <input type="text"/>	How much of the Volume will you manage with a Sump or Trench?
<input type="text"/>	Capture Volume to be managed (ft ³)

Enter the volumes into the **Small Project SWM Plan Worksheet** on the next sheet.

Native Species Trees (Common Name)

- | | |
|--|--|
| - Blackgum | - Sycamore, American |
| - Arrow-wood, southern | - Cotton-wood, eastern |
| - Box-elder | - Aspen, big-tooth or quaking |
| - Maple, (red or silver) | - Cherry, black |
| - Birch, (river or gray) | - Oak, (white, swamp white, scarlet, pin, willow, red) |
| - Ironwood | - Willow, black |
| - Hickory, sweet pignut or shag-bark | - Bald Cypress |
| - Cedar, (Atlantic white or eastern red) | - Basswood, American |
| - Beech, American | - Serviceberry, (downy or shadbush) |
| - Ash, (white, black or green) | - Redbud, eastern |
| - Holly, American | - Dogwood, flowering |
| - Tulip tree | - Magnolia, sweetbay |
| | - Pine, (pitch or eastern white) |

Small Project SWM Plan Worksheet

Based upon the information you have provided a *Stormwater Plan IS Required* for this development activity. The Stormwater Management Ordinance developed through the Washington County Act 167 Stormwater Management Plan regulates compliance requirements for Stormwater Management in this jurisdiction. A complete copy of the Plan can be found on the Washington County Planning office.

Regulated activities shall be conducted only after Robinson Township approves a stormwater management plan. The Washington County Act 167 Stormwater Management Plan will assist you in preparing the necessary information and plans for Robinson Township to review and approve. This document will constitute an approved plan if all of the relevant details are to be installed in their entirety AND no part of the stormwater system adversely affects any other property, nor adversely affect any septic systems or drinking water wells on this, or any other, parcel. If an alternative system is to be used a plan will need to be submitted to Robinson Township for approval. A design by a qualified professional may be required for more complex sites.

PLEASE INITIAL BELOW TO INDICATE THE STORMWATER MANAGEMENT PLAN FOR THIS SITE

☐

Minimum Control #1 Erosion & Sediment Pollution Control

Minimum Control #2: Source Control of Pollution

Minimum Control #3: Preservation of Natural Drainage Systems and Outfalls

The relevant details from Washington County Act 167 Stormwater Management Plan will be installed in their entirety AND the system will be located as not to adversely affect other property, nor any septic systems or drinking water wells on this, or any other, parcel.

☐

To meet this requirement, the following will be installed and maintained:

Capture Volume to be managed (ft ³)		Conversion	Surface Area of BMP (ft ²)
By Rain Garden 6" ponding; 2' soil depth	x	1.20	
Dry Well or Infiltration Trench 2 1/2' aggregate depth	x	1.25	
Total		Total	

☐

In lieu of meeting the above, an alternative and/or professional design is attached for approval AND the system will be located as not to adversely affect other property, any septic systems or drinking water wells on this, or any other, parcel.

☐

Site Sketch Plan showing:

- Property lines with dimensions
- Proposed buildings with dimensions
- Proposed impervious surfaces with dimensions
- Proposed septic system, if applicable
- Proposed well site, if applicable
- Proposed stormwater management system(s)

☐

Operation and Maintenance Agreement

Condition on approval - The stormwater management plan must be fully implemented prior to a request for final inspection of the building or zoning permit.

Acknowledgement - By executing below, the Owner acknowledges the following:

- I declare that I am the owner of the property.
- The information provided is accurate.
- I further acknowledge that municipal representatives are granted access to the above described property for review and inspection as may be required.

Owner _____

Date: _____

APPENDIX F – STORMWATER MANAGEMENT DISTRICTS



CC

CC

CC

(1)

OWNER'S ADOPTION

KNOW ALL MEN BY THESE PRESENTS, THAT (I or We) _____

_____ of the
(Name of Owner or Owners)Township of Robinson, County of

Washington, State of Pennsylvania, for (myself, ourselves), (my, our) heirs, executors, administrators and assigns, do hereby adopt this as (my, our) Plan of Subdivision of (my, our) property, situate in the Township of Robinson, County of Washington and Commonwealth of Pennsylvania, and for divers advantages accruing to (me, us), do hereby dedicate forever, for public use for highway, drainage, sewage and utility purposes, all drives, roads, streets, lands, right-of-ways, easements, ways and other public highways shown upon the Plan, with the same force and effect as if the same had been opened through legal proceedings and in consideration of the approval of said plan and any future acceptance of said public highways, right-of-ways, and easements by said County of Washington and Robinson Township.

(I or We), _____
(Name of Owner or Owners)

hereby agree to and by these presents do release and forever discharge said County of Washington and said Township of Robinson, their successors or assigns, from any liability for damages arising and to arise from the appropriation of said ground for public highways, and other public uses and the physical grading thereof to any grades that may be established. This dedication and release shall be binding upon

_____(my, our) heirs,
(Name of Owner or Owners)
executors, administrators and assigns and purchasers of lots in this plan.

IN WITNESS THEREOF, (I or We) hereunto set (my, our) hand(s) and seal(s)

this _____ day of _____, A.D., 20____.

Attest:

_____(SEAL)
(Owner or Owners)

_____(SEAL)
(Owner or Owners)

2/23/2007

(2)

FOR MINOR SUBDIVISIONS

3.1 OWNERS ADOPTION

KNOW ALL MEN BY THESE PRESENTS, THAT (I or We) (name of individual owner) of the TOWNSHIP of ROBINSON, of the COUNTY of WASHINGTON, Commonwealth of Pennsylvania, for (myself, ourselves), (my, our) heirs, executors, administrators and assigns, do hereby adopt this plan as (my, our) (plan of lots,) of (my, our) property, situated in the Township of Robinson of WASHINGTON COUNTY, Pennsylvania.

IN WITNESS WHERE, (I, We) hereunto set (my, our) hand and seal this

_____ day of _____ 20____

ATTEST:

Notary Public_____
Owner

2/27/2007

67

(3)

INDIVIDUAL ACKNOWLEDGMENT

COMMONWEALTH OF PENNSYLVANIA

SS

COUNTY OF WASHINGTON

Before me, the subscriber, a Notary Public in and for said State and County,
personally appeared the above named _____

(Owner)

and acknowledged the foregoing Release and Dedication and Plan to be (his, her,
their) act and deed and desired the same to be recorded as such:

Sworn to and subscribed before me the day and date written.

WITNESS MY HAND AND NOTARIAL SEAL this _____ day of _____ 20____.

Notary Public (SEAL)

My Commission Expires the _____ day of _____, A.D., 20____.

OWNER'S/CORPORATION'S CERTIFICATION

I or We, _____, owner
(Name of Owner or Owners)
of the _____ Subdivision _____, do hereby certify
that the title of this property is in the name of _____

as recorded in DEED BOOK VOLUME _____, PAGE _____, RECORDER OF
DEEDS

OFFICE. We further certify that there is no mortgage, lien or encumbrance against
this property.

Witness

Owner

Witness

Owner

2/23/2007

(4)

1.2 CORPORATION ADOPTION

KNOW ALL MEN BY THESE PRESENTS; that the (name of corporation), a corporation incorporation under the laws of the Commonwealth of Pennsylvania, by virtue of a resolution by the Board of Directors, thereof, does hereby adopt this plan as its (Plan of Lots, Land Development) of its property situate in the Township of Robinson, Washington County, Pennsylvania, and for divers advantages accruing to it, does hereby dedicate forever, for public use for highway purposes, all slope areas and all drives, roads, street, lanes, and other ways and other public highways shown upon the plan, with the same force and effect as if the same had been opened through legal proceedings, and in consideration of the approval of said plan, and any future acceptance of said public highways by the commonwealth of Pennsylvania, County of Washington, and Township of Robinson.

(name of corporation), hereby covenants and agrees to and by these presents does release and forever discharge said Commonwealth of Pennsylvania, County of Washington and Township of Robinson, their successors or assigns from any liability for damage arising and to arise from the appropriation of said ground for public highways and the physical grading thereof to any grades that may be established. This dedication and release shall be binding upon _____ (name of corporation) _____, its successors and assigns and purchasers of (lots, units) in this plan.

IN WITNESS WHEREOF, the said corporation has caused its corporate seal to be affixed by the hand of its president and same to be attested by its secretary this

_____ day of _____ 20 _____

ATTEST:

NAME OF CORPORATION

_____(SEAL)
Secretary

President

(5)
CORPORATION ACKNOWLEDGMENT

COMMONWEALTH OF PENNSYLVANIA :
 : SS
COUNTY OF WASHINGTON :

On this _____ day of _____, A.D. 20____, before me, a Notary
Public in and for said County and State, personally appeared

(Name and Title of Officer)

(Name of Corporation)

who being duly sworn deposeth and saith that he was personally present at the
execution of the adoption, release and dedication and saw the common and corporate
seal of the said corporation duly affixed and that the above release and dedication was
duly signed and sealed by and as for the act and deed of the said corporation, for the
uses and purposes therein mentioned and that the name of the deponent subscribed to
the said release and dedication as

of said corporation,

(Title of Officer)

attestation of the due execution and delivery of said release and dedication of this
deponent's own proper and respective handwriting.

(Name of Officer) (SEAL)

(Title of Officer)

Sworn to and subscribed before me the day and date written.

WITNESS MY HAND AND NOTARIAL SEAL this _____ day of _____
20____.

Notary Public (SEAL)

My Commission Expires the _____ day of _____, A.D., 20____.

(6)

B. To be used for partnerships. A general partner must sign.

The (NAME OF PARTNERSHIP), (OWNER OR BENEFICIAL OWNER) of the land shown on the (NAME OF PLAN) hereby adopts this plan as its (PLAN OF LOTS OR LAND DEVELOPMENT) and irrevocably dedicates all streets and other property identified for dedication on the plan to the (municipality). This adoption and dedication shall be binding upon the partnership and upon its heirs, executors and assigns.

IN WITNESS OF WHICH, to this (I/WE) set (MY, OUR) hand and seal this _____ day of _____, 20_____.

ATTEST:

Notary Public

Signature of General Partner

(7)

OWNERS' ACCEPTANCE OF RESPONSIBILITY FOR PROVIDING STORM WATER
DRAINAGE FACILITIES AND CONTROL OF STORM WATER DRAINAGE

KNOW ALL MEN BY THESE PRESENTS, THAT (I or We) _____

_____, of the Township of Robinson, County of Washington, Commonwealth of Pennsylvania, for ourselves, our heirs, executors, administrators and assigns, and for our grantees and their subsequent purchasers, do hereby accept full and complete responsibility, liability, expense and provision of facilities for the control of storm water drainage over, across and through this subdivision of land until such time as (I or We), our heirs, executors, administrators and assigns construct storm water drainage facilities in accordance with Township specifications and requirements and the same is officially accepted by action of the Governing Body and until such formal acceptance (I or We) for ourselves, our heirs, executors, administrators and assigns do hereby release the Township of Robinson from any responsibility in connection therewith. This acceptance of responsibility shall be binding upon

our heirs, executors, administrators and assigns, and all purchasers of lots in this plan of subdivision.

IN WITNESS WHEREOF, we hereunto set our hands and seals this _____

day of _____, A.D., 20_____.

ATTEST

(Owner or Owners) (SEAL)

(Owner or Owners) (SEAL)

WITNESS My hand and notarial seal this _____ day of _____, A.D., 19_____.

Notary Public (SEAL)

My Commission Expires the _____ day of _____, A.D., 20_____.

(8)

FOR ALL SUBDIVISIONS

2.1 TITLE CLAUSES

(I, We) _____ (name of owner) _____ owners of the _____
 (name of plan) _____, do hereby certify that the title of this property is in the name of _____
 as recorded in Deed Book Volume _____
 page _____, Recorder of Deeds Office. (I, We) further certify that
 there no mortgage, lien or encumbrance against this property.

Witness _____

Owner _____

2.2 TITLE CLAUSE (Having Mortgage or Encumbrance).

(I, We) _____ (name of owner) _____ owners of the _____
 (name of plan) _____, do hereby certify that the title
 of this property is in the name of _____ as recorded in Deed
 Book Volume _____, page _____ Recorder of Deeds Office.

Witness _____

Owner _____

(I, We) _____ (name of mortgagee) _____
 mortgagee of the property embraced in this _____ (name of plan) _____
 as recorded in Deed Book Volume _____, Page _____ Record of Deeds Office.

Witness _____

Mortgagee _____

2.3 SURVEYOR'S CERTIFICATION

I _____ A Professional Land Surveyor of the
 Commonwealth of Pennsylvania, do hereby certify, to the best of my knowledge,
 information and belief, that this plan correctly represents the lots, lands, streets and
 highways as surveyed and plotted by me for the owners or agents.

 (SEAL)

2/27/2007

(9)

HIGHWAY OCCUPANCY PERMIT REQUIREMENT

This plat requires a Highway Occupancy Permit pursuant to Section 420 of the Act of June 1, 1945 (P.L. 1242, No. 428), known as the "State Highway Law". Approvals of the Township of Robinson Planning Commission and the Township Board of Supervisors are conditional, subject to action of the Pennsylvania Department of Transportation pursuant to application for a Highway Occupancy Permit.

(10)

WASHINGTON COUNTY PLANNING COMMISSION REVIEW

Reviewed by the Washington County Planning Commission.

this _____ day of _____, 20____.

(Director)

(Chairman)

RECORDING REQUIREMENT

The foregoing adoption and dedication is made by

(Name of Owner or Owners)
_____ with the full understanding and agreement that

the review of the WASHINGTON COUNTY PLANNING COMMISSION, if hereto attached, will become null and void unless this plat is recorded in the RECORDER OF DEEDS OFFICE of WASHINGTON COUNTY, WASHINGTON, PENNSYLVANIA, within ninety (90) days of date of said review.

PROOF OF RECORDING

COMMONWEALTH OF PENNSYLVANIA :
: SS
COUNTY OF WASHINGTON :

Recorded in the Office for Recording of Deeds, Plats, etc., in said County, in Plan

Book Volume _____, page _____.

Given under my hand and seal this _____ day of _____, 20_____.

Recorder of Deeds

(11)

RECOMMENDATION OF THE ROBINSON TOWNSHIP PLANNING COMMISSION

This plan of lots has been reviewed and approval recommended by the Robinson

Township Planning Commission this _____ day of _____,

19_____, subject to the provisions and/or conditions in the Planning Commission's
letter to the Board of Supervisors dated _____, 20_____.

Secretary

Chairman Planning Commission

(12)

APPROVAL BY THE ROBINSON TOWNSHIP BOARD OF SUPERVISORS

The Board of Supervisors of the Township of Robinson, Washington County, Pennsylvania hereby approves this plan of subdivision for recording purposes only. This approval by Robinson Township does not constitute an acceptance of the roads, streets, storm and sanitary drainage facilities, easements or right-of-ways, water mains or any other services or improvements shown on this plan, nor an assumption of maintenance responsibility, nor will the same be accepted or maintained until constructed in accordance with all Township specifications and requirements and officially accepted by action of the Governing Body. This approval shall in no way be deemed an authorization to commence construction or related activities. This plan of subdivision approved by resolution of the Governing Body of the Township of Robinson, Washington County, Pennsylvania

on this _____ day of _____, 20_____.

ATTEST:

Secretary

Chairman, Board of Supervisors

SEAL:

2/23/2007

ARTICLE XVII

PRECEDENCE OF THIS SUBDIVISION ORDINANCE

1700 In the event of any conflict in the terms and conditions of this ordinance with the zoning ordinance as approved by the Governing Body, the terms of the current zoning ordinance will take precedence.

ARTICLE XVIII

VIOLATION AND PENALTY

1800 VIOLATIONS

Any person, partnership, or corporation who or which being the owner or agent of the owner of any lot, tract or parcel of land shall lay out, construct, open or dedicate any street, sanitary sewer, storm sewer, water main or other improvements for public use, travel or other purposes or for the common use of occupants of buildings abutting thereon, or who sells, transfers or agrees or enters into an agreement to sell any land in a subdivision or land development whether by reference to or by other use of a plat of such subdivision or land development or erect any building thereon, unless and until a final plat has been prepared in full compliance with the provisions of this act and of the regulations adopted hereunder and has been recorded as provided herein, shall be guilty of a misdemeanor, and upon conviction thereof, such person, or the members of such partnership, or the officers of such corporation, or the agent of any of them, responsible for such violation pay a fine not exceeding one thousand dollars (\$1,000) per lot or parcel or per dwelling within each lot or parcel. All fines collected for such violations shall be paid over to the municipality whose ordinance has been violated. The description by metes and bounds in the instrument of transfer or other document used in the process of selling or transferring shall not exempt the seller or transferor from such penalties or from the remedies herein provided.

1801 SEVERABILITY

Should any section, clause, provision or portion of this Ordinance be declared by a court of competent jurisdiction to be invalid or unconstitutional, such decision shall not affect or impair the validity of any other section, clause, provision or portion of this Ordinance.

It is hereby declared to be the intent of the Governing Body that this Ordinance would have been adopted had such invalid or unconstitutional provisions not been included herein, and the remaining portions of this Ordinance shall remain in effect as though the portion declared invalid or unconstitutional had never been a part hereof.

1802 REPEALER

All Resolutions, Ordinances, or part of Resolutions or Ordinances inconsistent herewith are hereby repealed.

⌘

⌘

⌘
i

1803 EFFECTIVE DATE

Effective date of this Ordinance, as amended shall be

November 13, 2007

1804 ENACTED

Enacted and ordained into an Ordinance by the Robinson Township Board of Supervisors this 13th day of November, 2007.

ROBINSON TOWNSHIP

By [Signature]
Chairman Board of Supervisors

ATTEST:

ROBINSON TOWNSHIP
WASHINGTON COUNTY, PENNSYLVANIA

[Signature]
Secretary

